



4800

hand-drawn

for light and medium-weight curtains



Stable rail with elegant appearance





4800


hand-drawn stable & elegant

The Goelst 4800 is a very stable rail because of its shape. It emanates elegance and simplicity. The track can be easily mounted on a wall or ceiling in various ways. A very popular track that can be used in a wide variety of situations, such as private homes, but also in office buildings and in the care sector.

- The ideal track for sheers, medium-heavy or heavy curtains.
- Easy to bend and exceptional quality.
- Can be forward or reverse bent in different radii.
- Compatible with the Goelst Flow System for regularly pleated curtains.
- Silent and smooth running, also round bends.



Standard colours

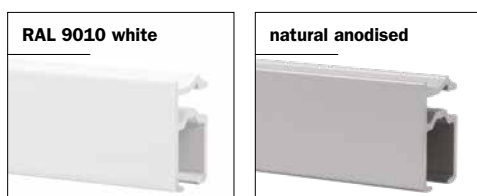


High quality, wear-resistant coating, highly colourfast, UV-resistant.
Other RAL colours & special coatings on request.

Features

Material:	aluminium
Colour:	white, natural anodised
Dimensions:	21 x 13 mm
Weight profile:	231 gr/m ¹
Mounting:	wall or ceiling

Profile specifications

Aluminium profile:



Colours with RAL code and lengths (m):

	RAL	4	5	6	7
white	9010	•	•	•	•
natural				•	

Mounting surface:

- wood
- masonry/concrete

Bracket type:

- ceiling bracket
- wall bracket
- spacer bracket

Bending:

bending radius	bending tool
R 10 cm	1015
R 15 cm	1015
R > 100 cm	1018

R 10 cm

R > 100 cm


Flow

The Goelst Flow System keeps pleats in curtains consistent. It can be used with small and wide channel tracks and, because of the broad assortment of components, it can be integrated in hand-drawn, cord-pulled and electrically operated systems.

The Flow System can also be used with curved curtain tracks. For further information, see the Flow product data sheet.




Mounting

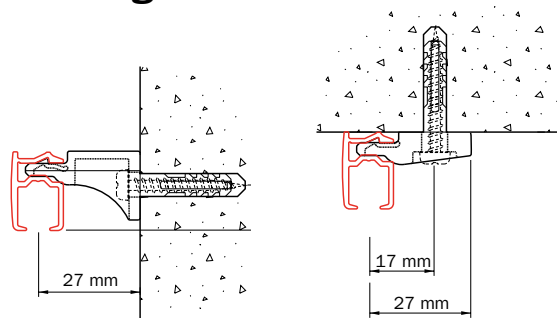


Wall mounting
with wall bracket 5351

Ceiling mounting
with wall bracket 5350

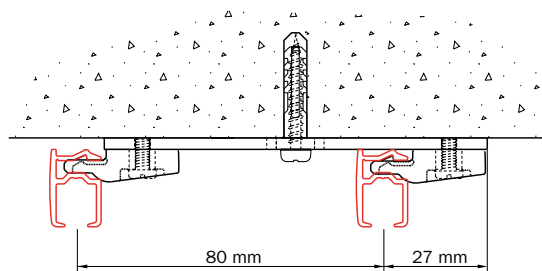


Ceiling mounting with double bracket 2216
and ceiling support 5350


Application example

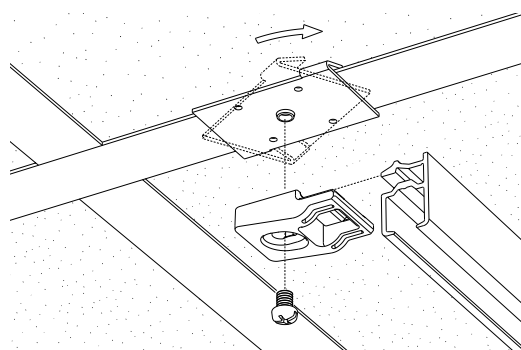

Mounting to suspended ceiling by means of grid bracket, this application is not suitable for heavy curtains.

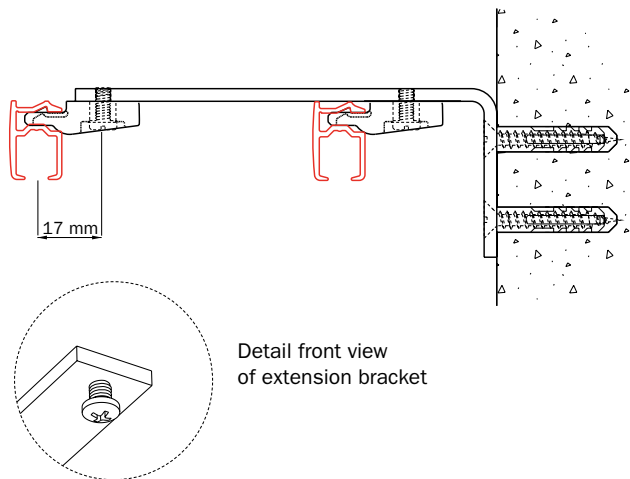


Detail front view of extension bracket

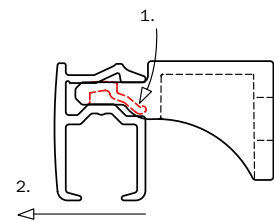

Method for uncoupling wall bracket 5351 and rail 4800

Mounting with extension brackets 2015, 2018 or 2019 in combination with ceiling bracket 5350

Mounting guideline



The distance between the brackets can vary depending on the following factors: the mounting surface (wood, concrete or plaster), the weight of the curtains and the curtain fabric production method, the specific application and the system usage intensity. General advice: with the curtains open, place additional brackets where the pleats bunch together. Also place additional brackets before and after bends.

Specification guide

Material


- Aluminium EN AW-6060-T66.
- Anodised in accordance with the Qualanod standard.
- Powder coated in accordance with the Qualicoat standard.

Standard parts

Curtain transport



4001
end stop
white / grey / black



4010
glider
white / grey / black

Mounting



5350
ceiling bracket
white




5351
wall bracket
white

Accessories




4853
end cap
white / grey



4852
connecting
bridge 6cm

Optional parts

Curtain transport



2004
brake glider
white / grey / black



4001-M-N
end stop metal with
eye natural



4002
end stop metal



4003
spring stop plastic
requires punch hole
white



4007
rotating glider white/
grey / silver / black



4007-LRS
rotating glider LRS
grijs / rotating glider
LRS red




4010-50
glider white with
plastic hook 2023




4012
click-in glider white



4020
heavy duty glider
white / grey / black



4074-1000
carrier with
overlap, a.o. for
draw rod
white / natural
metallic / black



4075-1000
carrier without
overlap, a.o. for
draw rod white /
natural metallic /
black



2020
double hook
white



2021
G-Hook white




2022
curtain hook
white



2023
curtain hook
white




2024-55
adjustable sew
in hook white
55mm




2024-95
adjustable sew
in hook white
95mm


Mounting




2050-SYST
T-bar clip white for
ceiling grid




2216
double bracket
white / natural
metallic / black



2015
extension bracket
5, 7.5, 10, 15 cm
white / natural
metallic / black



2018
extension bracket
heavy duty 15 cm
white / natural
metallic



2019
extension bracket heavy
duty 20, 25, 30 cm
white / natural metallic
/ zwart

Accessories



4048-12MM
corner connection



7399
plexiglass draw rod
transparent



Goelst UK Ltd

Crimple Court | Hornbeam Park | Harrogate | HG2 8PB
Tel 01423 873002 | Fax 01423 874006 | info@goelstuk.com | www.goelst.co.uk