



1. Geberit Mapress Stainless Steel



1.1	Preliminary remarks.....	9
	Application overview: Geberit Mapress Stainless Steel for liquid media	10
	Application overview: Geberit Mapress Stainless Steel for gaseous media ..	10
1.2	Geberit Mapress Stainless Steel	12
1.2.3	System pipes 1.4401 (AISI 316)	12
1.2.1	System pipes 1.4301 (AISI 304).....	12
1.2.4	Pipe nipples	12
1.2.2	Couplings	12
1.2.5	Reducers.....	13
1.2.6	Bends	14
1.2.7	T-pieces.....	19
1.2.8	Adaptors, permanent.....	22
1.2.9	Adaptors and connections, detachable.....	25
1.2.10	Compensators	32
1.2.11	Feed-throughs	32
1.2.12	Sealings.....	33
1.2.13	Connections	33
1.3	Geberit Mapress Stainless Steel, Gas.....	35
1.3.3	System pipes 1.4401 (AISI 316)	35
1.3.1	Pipe nipples	35
1.3.2	Couplings	35
1.3.4	Reducers.....	36
1.3.5	Bends	36
1.3.6	T-pieces.....	40
1.3.7	Adaptors, permanent.....	43
1.3.8	Adaptors and connections, detachable.....	46
1.3.9	Sealings.....	50
1.3.10	Connections	50

1.4	Geberit Mapress Stainless Steel, silicone-free	52
1.4.2	System pipes 1.4401 (AISI 316)	52
1.4.1	Couplings	52
1.4.3	Reducers	53
1.4.4	Bends	54
1.4.5	T-pieces	55
1.4.6	Adaptors, permanent	58
1.4.7	Adaptors and connections, detachable	59
1.4.8	Sealings	65
1.4.9	Connections	65
1.4.10	Compensators	66
1.4.11	Feed-throughs	67
1.5	Geberit Mapress Stainless Steel, FKM, blue	68
1.5.2	System pipes 1.4401 (AISI 316)	68
1.5.1	System pipes 1.4301 (AISI 304)	68
1.5.3	Pipe nipples	69
1.5.4	Couplings	69
1.5.5	Reducers	70
1.5.6	Bends	70
1.5.7	T-pieces	75
1.5.8	Adaptors, permanent	78
1.5.9	Adaptors and connections, detachable	80
1.5.10	Sealings	85
1.5.11	Connections	85
1.5.12	Feed-throughs	85
1.6	Geberit Mapress Stainless Steel, accessories	86
1.6.1	Insulations for connectors	86
1.6.2	Caulks for pipes and fittings	86
1.6.3	Pipe fastenings	87
1.6.4	Connector fastenings	89
1.6.5	System seals	90
1.6.6	Sets of bolts for flange connections	93

1.1 Preliminary remarks

Introduction to Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel is especially suited for potable water installations as well as for open and closed heating and cooling circuits. There are special fittings available for gas installations, as well as solar and industrial applications.

Thanks to the pressing technology, installations can be carried out reliably and quickly without complex welding and soldering.

In addition to the standard Geberit Mapress Stainless Steel product range, LABS free fittings are also available.

Benefits of Geberit Mapress Stainless Steel

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Extremely suitable for renovation of living areas
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

High molybdenum content

High resistance to corrosion due to 2.2% minimum Molybdenum content compared to the industry standard of 2%

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application. Page x gives an overview of applications for all of our Geberit Mapress materials. See page x for an in depth overview of the applications for Geberit Mapress Stainless Steel.

Only Geberit Mapress system pipes are suitable to press Geberit Mapress Stainless Steel fittings. To adapt on to existing or dissimilar materials you must use a threaded connection.

Use the correct tooling

Always check that you are using the correct tools, this can be checked in the Geberit Tooling Product Guide and Price List.

Make sure that the tools you are using are in a good condition and are calibrated. There should be a sticker on the tool, jaws, collars and adapters to tell you when the tool next needs calibrating. Go to www.geberit.co.uk/toolservice to find your nearest tool service agent.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview: Geberit Mapress Stainless Steel for liquid media

Geberit Great Britain, version: January 2016

Application purposes	Operating temperature	Maximum operating pressure	Pipes			Fittings		
			CrNiMo steel 1.4401 / 316	CrMoTi steel 1.4521 / 444	CrNi steel 1.4301 / 304	CrNiMo steel 1.4401 / 316	Gunmetal	
For cold and hot potable water	0–100 °C	16 bar / 1600 kPa	✓	✓		✓	✓	
For heating water	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For cooling water without antifreeze agent	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For cooling water with antifreeze agent	-30 – +40 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For remote network heating water ≤ 120 °C	0–120 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For remote network heating water ≤ 140 °C	0–140 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For saturated steam ≤ 120 °C	0–120 °C	2 bar / 200 kPa	✓	✓	✓	✓		
For saturated steam ≤ 155 °C	5–155 °C	5 bar / 500 kPa	✓			✓		
For service water	0–100 °C	16 bar / 1600 kPa	✓	✓		✓	✓	
For ultrapure water (except pharmaceutical water)	0–100 °C	16 bar / 1600 kPa	✓	✓		✓		
For rainwater with a pH value of > 6.0	0–100 °C	16 bar / 1600 kPa	✓	✓		✓	✓	
For grey and black water with pH value > 6.0	0–100 °C	16 bar / 1600 kPa	✓	✓		✓		
For extinguishing water (wet)	0–70 °C	16 bar / 1600 kPa	✓			✓	✓	
For extinguishing water (wet/dry, dry)	0–70 °C	16 bar / 1600 kPa	✓			✓		
For sprinklers (wet)	0–70 °C	16 / 10 bar 1600 / 1000 kPa	✓ ²⁾			✓		
For sprinklers (wet/dry, dry)	0–70 °C	16 / 10 bar 1600 / 1000 kPa	✓ ²⁾			✓		
For thermal media (solar)	-25 - +220 °C ¹⁾	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For mineral oils	Upon request	Upon request	✓	✓	✓	✓	✓	
For fuels	Upon request	Upon request	✓	✓	✓	✓	✓	
For chemicals and technical liquids	Upon request	Upon request	✓ ³⁾	✓ ³⁾	✓ ³⁾	✓ ³⁾	✓ ³⁾	✓ ³⁾

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Service life with collector downtime: 200 h/a at 180 °C, 60 h/a at 200 °C, total of 500 h/service life at 220 °C

²⁾ 16 bar / 1600 kPa for d22–76.1, 10 bar / 1000 kPa for d88.9–108

³⁾ After Geberit approval

⁴⁾ Only use approved inhibitors

⁵⁾ Only use approved antifreeze agents

⁶⁾ Only use fittings with union nuts made of CrNi steel

Application overview: Geberit Mapress Stainless Steel for gaseous media

Geberit Great Britain, version: January 2016

Application purposes	Operating temperature	Maximum operating pressure	Pipes			
			CrNiMo steel 1.4401 / 316	CrMoTi steel 1.4521 / 444	CrNi steel 1.4301 / 304	
For compressed air (oil purity class 0–3)	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa	✓ ¹⁾	✓ ³⁾	✓ ⁴⁾	
For compressed air (oil purity class 0–X)	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa	✓ ¹⁾	✓ ³⁾	✓ ⁴⁾	
For negative pressure	0–40 °C	Abs. ≥ 0,2 bar / 20 kPa	✓	✓	✓	
For inert gases (e.g. nitrogen)	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa	✓ ¹⁾	✓ ³⁾	✓ ⁴⁾	
For industrial gases (e.g. acetylene, shielding gases)	Upon request	Upon request	✓			
For natural gases	-20 – +70 °C	5 / 1 bar 500 / 100 kPa	✓			
For liquefied gases	-20 – +70 °C	5 / 1 bar 500 / 100 kPa	✓			
For biogases	-20 – +70 °C	5 / 1 bar 500 / 100 kPa	✓ ²⁾			

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ 25 bar / 2500 kPa for d12–54, 16 bar / 1600 kPa for d76.1, 12 bar / 1200 kPa for d88.9–108

²⁾ After Geberit approval

³⁾ 16 bar / 1600 kPa for d15–54

⁴⁾ 16 bar / 1600 kPa for d15–76.1, 10 bar / 1000 kPa for d88.9–108

⁵⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"


	Seal rings				Flat gaskets for screw connections				Flange gaskets
	CIIR, black	FKM, blue	FKM, white	FPM, red	EPDM, black	FPM, green	Centellen® R 3825	Centellen® 3822	Centellen® 3822
	✓				✓				✓
	✓ ⁴⁾				✓ ⁴⁾				✓
	✓				✓				✓
	✓ ⁵⁾						✓ ⁶⁾		✓
	✓ ⁴⁾					✓	✓ ⁶⁾		✓
		✓ ⁴⁾					✓ ⁶⁾		✓
	✓ ⁴⁾						✓ ⁶⁾		✓
			✓ ⁴⁾					✓ ⁶⁾	✓
	✓ ³⁾				✓ ³⁾				✓ ³⁾
	✓				✓				✓
	✓				✓				✓
	✓				✓				✓
	✓				✓				✓
				✓		✓			✓
	✓				✓				✓
				✓		✓			✓
		✓				✓			✓
		✓				✓			✓
		✓ ³⁾				✓ ³⁾			✓ ³⁾
	✓ ³⁾	✓ ³⁾			✓ ³⁾	✓ ³⁾	✓ ^{3) 6)}	✓ ^{3) 6)}	✓ ³⁾

	Fittings		Seal rings			Flat gaskets for screw connections			Flange gaskets
	CrNiMo steel 1.4401 / 316	Gunmetal	CIIR, black	FKM, blue	HNBR, yellow	EPDM, black	FPM, green	Centellen® 3822	Centellen® 3822
	✓	✓	✓ ⁵⁾			✓ ⁵⁾			✓
	✓	✓		✓ ⁵⁾			✓ ⁵⁾		✓
	✓	✓	✓						✓
	✓	✓	✓			✓			✓
	✓		✓ ²⁾	✓ ²⁾					✓ ²⁾
	✓				✓			✓	✓
	✓				✓			✓	✓
	✓ ²⁾				✓ ²⁾			✓ ²⁾	✓ ²⁾

1.2 Geberit Mapress Stainless Steel

1.2.3 System pipes 1.4401 (AISI 316)

Geberit Mapress Stainless Steel system pipe, CrNiMo, small bundle



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39202	12	15	13	1	6	120		6.90
39203	15	18	16	1	6	90		8.14
39204	20	22	19.6	1.2	6	60		11.01
39205	25	28	25.6	1.2	6	60		13.58
39206	32	35	32	1.5	6	30		19.99
39207	40	42	39	1.5	6	30		24.60
39208	50	54	51	1.5	6	30		31.29
39209	65	76.1	72.1	2	6		6	63.44
39210	80	88.9	84.9	2	6		6	72.27
39211	100	108	104	2	6		6	87.07

1.2.1 System pipes 1.4301 (AISI 304)

Geberit Mapress Stainless Steel system pipe, CrNi, small bundle



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNi steel 1.4301 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.016 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39602	12	15	13	1	6	120		5.84
39603	15	18	16	1	6	90		6.92
39604	20	22	19.6	1.2	6	60		9.32
39605	25	28	25.6	1.2	6	60		11.49
39606	32	35	32	1.5	6	30		17.14
39607	40	42	39	1.5	6	30		21.01
39608	50	54	51	1.5	6	30		26.54
39109	65	76.1	73.1	1.5	6		6	35.23
39110	80	88.9	85.9	1.5	6		6	40.33
39111	100	108	104	2	6		6	48.50

1.2.4 Pipe nipples

Geberit Mapress Stainless Steel pipe nipple



Application purposes

- For shortest construction length between two pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5	5	1	2.50
32051	15	18	16	1	5		1	2.71
32052	20	22	19.6	1.2	5.2	5	1	2.90
32053	25	28	25.6	1.2	5.6		1	3.69
32054	32	35	32	1.5	6.2		1	4.74
32055	40	42	39	1.5	8		1	6.71
32056	50	54	51	1.5	9		1	8.71
32057	65	76.1	72.1	2	13.6		1	35.87
32058	80	88.9	84.9	2	15		1	41.82
32059	100	108	104	2	18		1	58.53

1.2.2 Couplings

Geberit Mapress Stainless Steel coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Reducers

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.	
33001	N	10	12	4.2	0.8	200	10	5.96
32002		12	15	4.8	0.8	200	20	4.86
32003		15	18	4.8	0.8	200	20	5.24
32004		20	22	5	0.8	160	20	6.12
32005		25	28	5.4	0.8	120	20	6.94
32006		32	35	6.2	1	100	5	8.58
32007		40	42	7.1	1.1	24	4	11.73
32008		50	54	8.3	1.3	20	4	14.07
32009		65	76.1	14.1	3.5	6	2	69.66
32010		80	88.9	16.2	4.2	6	2	79.59
32011		100	108	19.4	4.4	6	2	101.13

N: New, available as of April 2016

1.2.5 Reducers

Geberit Mapress Stainless Steel reducer with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							GBP/pc.
Art. no.	DN	d, \varnothing [mm]	d1, \varnothing [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33002	N	12 / 10	15	12	3.4	5.1	25	5	6.53
33003	N	15 / 10	18	12	3.6	5.3	6	1	6.68
32303		15 / 12	18	15	3.5	5.5	100	20	5.42
33004	N	20 / 10	22	12	4.3	6		1	6.96
32305		20 / 12	22	15	3.9	5.9	100	20	5.93
32306		20 / 15	22	18	3.7	5.7	100	20	5.93
32307		25 / 12	28	15	4.6	6.6	50	10	6.77
32308		25 / 15	28	18	4.4	6.4	50	10	6.77
32309		25 / 20	28	22	3.9	6	100	20	6.77
32310		32 / 12	35	15	5.5	7.5	25	5	11.45
32311		32 / 15	35	18	5.4	7.4	25	5	11.45
32312		32 / 20	35	22	5	7.1	50	5	11.45
32313		32 / 25	35	28	4.5	6.8	100	5	11.45
32314		40 / 12	42	15	6.1	8.1	6	1	20.86
32315		40 / 15	42	18	6	8	6	1	20.86
32316		40 / 20	42	22	6.1	8.2	24	4	20.86
32317		40 / 25	42	28	6	8.3	52	4	20.86
32318		40 / 32	42	35	5.1	7.7	52	4	20.86
32319		50 / 12	54	15	7.7	9.7	6	1	29.18
32320		50 / 15	54	18	7.6	9.6	6	1	29.18
32321		50 / 20	54	22	7.4	9.5	10	1	29.18
32322		50 / 25	54	28	8.7	11	32	4	29.18
32323		50 / 32	54	35	8	10.6	32	4	29.18
32324		50 / 40	54	42	6.2	9.2	32	4	29.18
32331		65 / 50	76.1	54	11.1	14.6	10	1	62.57
32338		80 / 50	88.9	54	12.8	16.3	4	1	66.75
32339		80 / 65	88.9	76.1	10.8	16.1		1	66.75
32345		100 / 50	108	54	13.7	17.2		1	72.99
32346		100 / 65	108	76.1	13.1	18.4		1	72.99
32348		100 / 80	108	88.9	14.3	20.3		1	72.99

N: New, available as of April 2016

Geberit Mapress Stainless Steel slip coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							GBP/pc.
Art. no.	DN	d, \varnothing [mm]	E [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32102	12	15	2.5	8	3	50	10		8.12
32103	15	18	2.5	8	3	50	10		8.43
32104	20	22	2.5	8.4	3.4	50	10		9.61
32105	25	28	3	9.1	3.1	50	10		11.14
32106	32	35	3	10.2	4.2	50	5		12.44
32107	40	42	4	12	4	20	4		14.48
32108	50	54	4	14	6	40	2		18.49
32109	65	76.1	6	23	11			1	102.84
32110	80	88.9	7	26	12			1	116.12
32111	100	108	8	31	15			1	139.29

1.2.6 Bends

Geberit Mapress Stainless Steel bend 15°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
36101	12	15	3	1	6	1	7.28	
36103	20	22	3.3	1.2	6	1	9.90	
36104	25	28	3.6	1.3	6	1	12.50	
36105	32	35	3.2	0.6	6	1	19.29	
36106	40	42	3.7	0.7	6	1	30.24	
36107	50	54	4.4	0.9	6	1	41.72	
36108	65	76.1	7.5	2.2		1	104.30	
36109	80	88.9	8.5	2.5		1	131.00	
36110	100	108	10.3	2.8		1	179.11	

Geberit Mapress Stainless Steel bend 15° with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
36111	12	15	4	3	1		1	7.28
36113	20	22	4.1	3.3	1.2	6	1	9.90
36114	25	28	4.3	3.6	1.3	6	1	12.50
36115	32	35	4.1	3.2	0.6	6	1	19.29
36116	40	42	4.7	3.7	0.7		1	30.24
36117	50	54	5.5	4.4	0.9		1	41.72
36118	65	76.1	8.4	7.5	2.2		1	104.30
36119	80	88.9	9.5	8.5	2.5		1	131.00
36120	100	108	11.7	10.3	2.8		1	179.11

Geberit Mapress Stainless Steel bend 30°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
36121	12	15	3.3	1.3	6		1	7.28
36123	20	22	3.7	1.6	25	5		9.90
36124	25	28	4.1	1.8	10		1	12.50
36125	32	35	3.7	1.1	10		1	19.29
36126	40	42	4.4	1.4	6		1	30.24
36127	50	54	5.2	1.7	6		1	41.72
36128	65	76.1	8.8	3.5			1	104.30
36129	80	88.9	10.1	4.1			1	131.00
36130	100	108	12.2	4.7			1	179.11

Geberit Mapress Stainless Steel bend 30° with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
36131	12	15	4.3	3.3	1.3	6	1	7.28
36133	20	22	4.6	3.7	1.6	10	1	9.90
36134	25	28	4.8	4.1	1.8	6	1	12.50
36135	32	35	4.6	3.7	1.1	6	1	19.29
36136	40	42	5.4	4.4	1.4	6	1	30.24
36137	50	54	6.3	5.2	1.7	6	1	41.72
36138	65	76.1	9.7	8.8	3.5		1	104.30
36139	80	88.9	11.1	10.1	4.1		1	131.00
36140	100	108	13.6	12.2	4.7		1	179.11

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30602	12	15	3.6	1.6	100	20		7.28
30603	15	18	3.7	1.7	100	20		8.13
30604	20	22	4.2	2.1	100	20		9.90
30605	25	28	4.8	2.5	70	10		12.50
32606	32	35	4.3	1.7	100	5		19.29
32607	40	42	5.1	2.1	32	4		30.24
32608	50	54	6.2	2.7	40	2		41.72
32609	65	76.1	10.1	4.8	4	2		104.30
32610	80	88.9	11.7	5.7	6		1	131.00
32611	100	108	14.3	6.8	4		1	179.11

Geberit Mapress Stainless Steel bend 45° with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30702	12	15	4.5	3.6	1.6	200	20		7.28
30703	15	18	4.2	3.7	1.7	100	20		8.13
30704	20	22	5.2	4.2	2.1	120	20		9.90
30705	25	28	5.6	4.8	2.5	70	10		12.50
32706	32	35	5.3	4.3	1.7	100	5		19.29
32707	40	42	6.1	5.1	2.1	36	4		30.24
32708	50	54	7.3	6.2	2.7	20	2		41.72
32709	65	76.1	11.1	10.1	4.8	4		1	104.30
32710	80	88.9	13	11.7	5.7	4		1	131.00
32711	100	108	15.7	14.3	6.8			1	179.11

Geberit Mapress Stainless Steel bend 45°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Geberit Mapress Stainless Steel bend 60°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
36161	12	15	4	2		1	7.28
36163	20	22	4.7	2.6		1	9.90
36164	25	28	5.4	3.1	6	1	12.50
36165	32	35	5	2.4		1	19.29
36166	40	42	5.9	2.9		1	30.24
36167	50	54	7.2	3.7		1	41.72
36168	65	76.1	11.7	6.4		1	104.30
36169	80	88.9	13.6	7.6		1	131.00
36170	100	108	16.6	9.1		1	179.11

Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
36171	12	15	5	4	2		1	7.28
36173	20	22	5.6	4.7	2.6		1	9.90
36174	25	28	6.1	5.4	3.1		1	12.50
36175	32	35	5.9	5	2.4	6	1	19.29
36176	40	42	6.9	5.9	2.9		1	30.24
36177	50	54	8.3	7.2	3.7		1	41.72
36178	65	76.1	12.6	11.7	6.4		1	104.30
36179	80	88.9	14.6	13.6	7.6		1	131.00
36180	100	108	18	16.6	9.1		1	179.11

Geberit Mapress Stainless Steel bend 90°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30102	12	15	4.9	2.9		200	20		7.28
30103	15	18	5.3	3.3		140	20		8.13
30104	20	22	6.1	4		100	20		9.90
30105	25	28	7.2	4.9		100	10		12.50
31106	32	35	6.8	4.2	120	30	5		19.29
31107	40	42	8	5		20	2		30.24
31108	50	54	10	6.5		30	2		41.72
31109	65	76.1	15.7	10.4		8	2		104.30
31110	80	88.9	18.4	12.4		8	2		131.00
31111	100	108	22.6	15.1	48	3		1	179.11

Geberit Mapress Stainless Steel bend 60° with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Geberit Mapress Stainless Steel bend 90° with plain end

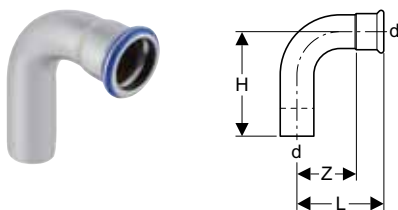

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30302	12	15	5.9	4.9	2.9	200	20		7.28
30303	15	18	6.1	5.3	3.3	160	20		8.13
30304	20	22	7	6.1	4	100	20		9.90
30305	25	28	7.9	7.2	4.9	100	10		12.50
33306	32	35	7.7	6.8	4.2	80	5		19.29
33307	40	42	9	8	5	50	2		30.24
33308	50	54	11.1	10	6.5	16	2		41.72
33309	65	76.1	16.6	15.7	10.4	5		1	104.30
33310	80	88.9	19.4	18.4	12.4	6		1	131.00
33311	100	108	24	22.6	15.1			1	179.11

Geberit Mapress Stainless Steel bend with plain ends 15°



Application purposes


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
30892	12	15	6	12.2	2.1	8.3		1	8.65
30893	15	18	5.5	12.8	1.5	8.8	5	1	8.84
30894	20	22	5	12.4	0.7	8.1	5	1	9.36
30905	25	28	4.5	13.4	0	8.9	5	1	9.70
30906	32	35	7.3	22.2	2	16.9	10	1	20.33
30907	40	42	8.9	28	3	22.1	5	1	25.02
30908	50	54	12.2	33.7	4.5	26	5	1	31.28
30009	65	76.1	8.4	20.4	0	12		1	98.03
30010	80	88.9	9.5	22	0	12.5		1	110.55
30011	100	108	11.7	25.4	0	13.7		1	132.46

Geberit Mapress Stainless Steel bend with plain ends 30°



Application purposes


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
30932	12	15	6	12.2	2.1	8.3		1	8.65
30933	15	18	5.5	12.8	1.6	8.9	10	1	8.84
30934	20	22	5	12.4	0.6	8	5	1	9.36
30935	25	28	5.1	13	0	7.9	10	1	9.70
30936	32	35	8	21.4	2	15.4	5	1	20.33
30937	40	42	9.9	27.2	3	20.3	5	1	25.02
30938	50	54	13.4	32.6	5.5	24.7	5	1	31.28
30029	65	76.1	9.7	21.7	0	12		1	98.03
30030	80	88.9	11.1	23.6	0	12.5		1	110.55
30031	100	108	13.6	27.3	0	13.7		1	132.46

Geberit Mapress Stainless Steel bend with plain ends 45°




Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
30872	12	15	6.2	12	1.9	7.7	5	1	8.65	
30873	15	18	5.8	12.4	1.6	8.2	5	1	8.84	
30874	20	22	5.6	12	0.7	7.1	5	1	9.36	
30875	25	28	5.8	12.2	0.2	6.6	5	1	9.70	
30876	32	35	9.4	20.6	2	13.2	5	1	20.33	
30877	40	42	11.4	26.2	0.1	14.9		1	25.02	
30878	50	54	14.6	32.1	3.7	21.2		1	31.28	
30049	65	76.1	11.1	23	0	11.9		1	98.03	
30050	80	88.9	13	25.2	0	12.2		1	110.55	
30051	100	108	15.7	29.4	0	13.7		1	132.46	

Geberit Mapress Stainless Steel bend with plain ends 60°

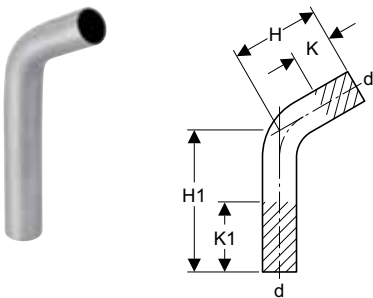

Application purposes


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU1 [pc.]	GBP/pc.		
30942	12	15	6	12.2	2.1	8.3	1	8.65		
30943	15	18	6.2	12.2	1.6	7.6	1	8.84		
30944	20	22	6	11.8	0.5	6.3	1	9.36		
30955	25	28	6.3	12.1	0	5.8	1	9.70		

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU1 [pc.]	GBP/pc.	
30956	32	35	9.7	20.3	2	12.6	1	20.33	
30957	40	42	12	25.6	3	16.6	1	25.02	
30958	50	54	16.2	30.6	5.5	19.9	1	31.28	
30069	65	76.1	12.6	24.6	0	12	1	98.03	
30070	80	88.9	14.6	27.1	0	12.5	1	110.55	
30071	100	108	18	31.7	0	13.7	1	132.46	

Geberit Mapress Stainless Steel bend with plain ends 90°

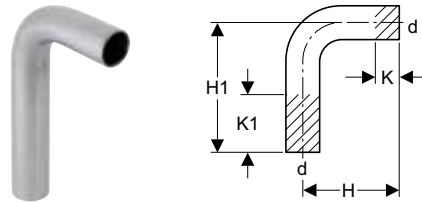


Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)										
Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
30402	12	15	7	12	2.2	7.2	5750	50	10		8.65	
30403	15	18	7	12	1.7	6.7		50	10		8.84	
30404	20	22	7	12	0	5		50	10		9.36	
30405	25	28	8	12	0	4		50	10		9.70	
30406	32	35	12	20	2	10		10		1	20.33	
30407	40	42	15	25	3	13		8		1	25.02	
30408	50	54	20	30	5.5	15.5		10		1	31.28	
30089	65	76.1	16.6	28.6	0	12				1	98.03	
30090	80	88.9	19.4	31.9	0	12.5				1	110.55	
30091	100	108	24	37.7	0	13.7				1	132.46	

Geberit Mapress Stainless Steel pipe bridge

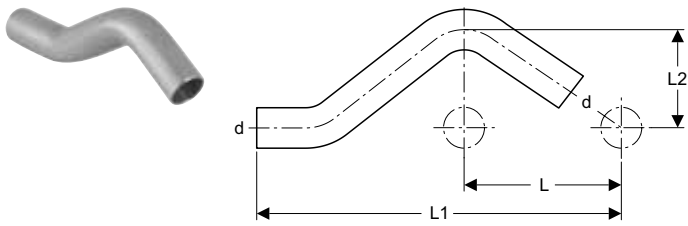

Application purposes


- For crossing parallel pipes with distance L
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30802	12	15	5.7	15.8	3	10	1		7.46
30803	15	18	6	16.6	3.1	10	1		7.72
30804	20	22	6.5	17.9	3.3	10	1		8.76
30805	25	28	7.3	20.6	3.6	5	1		10.61

1.2.7 T-pieces

Geberit Mapress Stainless Steel T-piece, equal

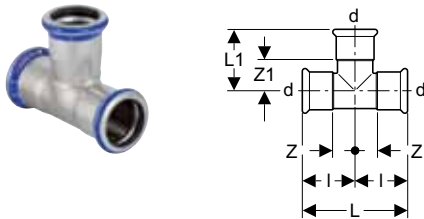

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33008	N 10	12	5.6	3.5	2.8	1.1	1.8	50	10		10.75
31002	12	15	6.4	3.9	3.2	1.2	1.9	140	20		11.32
31003	15	18	6.8	4.1	3.4	1.4	2.1	100	20		12.90
31004	20	22	7.4	4.4	3.7	1.6	2.3	80	20		13.86
31005	25	28	8.4	5	4.2	1.9	2.7	90	10		16.28
31006	32	35	10	5.7	5	2.4	3.1	50	5		20.58
31007	40	42	11.4	6.5	5.7	2.7	3.5	40	4		29.21
31008	50	54	13.8	7.7	6.9	3.4	4.2	30	2		34.91
31009	65	76.1	23	11	11.5	6.2	5.7	5		1	192.28
31010	80	88.9	26	12.8	13	7	6.8			1	210.40
31011	100	108	31	15.3	15.5	8	7.8			1	259.67

N: New, available as of April 2016

Geberit Mapress Stainless Steel T-piece, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.		DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33005	N	12 / 10 / 12	15	12	15	6.4	3.6	3.2	3.2	1.2	1.9	1.2	6		1	11.43
33006	N	15 / 10 / 15	18	12	18	6.8	3.8	3.4	3.4	1.4	2.1	1.4			1	11.90
31208		15 / 12 / 12	18	15	15	7.9	4.1	3.4	4.5	1.4	2.1	2.5		10		11.13
31204		15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4	100	20		11.68
33007	N	20 / 10 / 20	22	12	22	7.4	4	3.7	3.7	1.6	2.3	1.6			1	12.58
31227		20 / 12 / 15	22	15	18	8.5	4.3	3.7	4.8	1.6	2.3	2.8		10		11.90
31206		20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	100	20		12.50
31228		20 / 15 / 15	22	18	18	8.5	4.3	3.7	4.8	1.6	2.3	2.8		10		11.90
31207		20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	100	20		12.50
31209		25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	50	10		15.12
31210		25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	50	10		15.12
31234		25 / 20 / 20	28	22	22	9	4.7	4.2	4.8	1.9	2.6	2.7		10		14.39
31211		25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9	100	10		15.12
31212		32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4	30	5		18.45
31213		32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4	30	5		18.78
31235		32 / 20 / 25	35	22	28	10.4	5	5	5.4	2.4	2.9	3.1		4		17.87
31214		32 / 20 / 32	35	22	35	10	5	5	5	2.4	2.9	2.4	30	5		18.78
31242		32 / 25 / 25	35	28	28	10.4	5.3	5	5.4	2.4	3	3.1		4		17.87
31215		32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4	30	5		18.78
31216		40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	10		1	27.10
31217		40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	24	4		27.10
31243		40 / 20 / 32	42	22	35	11.5	5.4	5.7	5.8	2.7	3.3	3.2		4		25.82
31218		40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7	52	4		27.10
31251		40 / 25 / 32	42	28	35	11.5	5.7	5.7	5.8	2.7	3.4	3.2		4		25.82
31219		40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	52	4		27.10
31220		40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	52	4		27.10
31221		50 / 12 / 50	54	15	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	6		1	31.28
31222		50 / 15 / 50	54	18	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	14	2		31.28
31223		50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4	30	2		31.28
31224		50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4	26	2		31.28
31225		50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4	30	2		31.28
31226		50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4	24	2		31.28
31229		65 / 20 / 65	76.1	22	76.1	23	7.7	11.5	11.5	6.2	5.6	6.2			1	162.71
31230		65 / 25 / 65	76.1	28	76.1	23	7.9	11.5	11.5	6.2	5.6	6.2			1	162.71
31231		65 / 32 / 65	76.1	35	76.1	23	8.1	11.5	11.5	6.2	5.5	6.2			1	162.71
31232		65 / 40 / 65	76.1	42	76.1	23	8.1	11.5	11.5	6.2	5.1	6.2			1	162.71
31233		65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2	4		1	162.71
31236		80 / 20 / 80	88.9	22	88.9	26	8.5	13	13	7	6.4	7			1	177.31
31237		80 / 25 / 80	88.9	28	88.9	26	8.7	13	13	7	6.4	7			1	177.31
31238		80 / 32 / 80	88.9	35	88.9	26	9	13	13	7	6.4	7			1	177.31
31239		80 / 40 / 80	88.9	42	88.9	26	9.2	13	13	7	6.2	7			1	177.31
31240		80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7	5		1	177.31
31241		80 / 65 / 80	88.9	76.1	88.9	26	11.4	13	13	7	6.1	7			1	177.31
31244		100 / 20 / 100	108	22	108	31	10.3	15.5	15.5	8	8.2	8			1	208.61
31245		100 / 25 / 100	108	28	108	31	10.5	15.5	15.5	8	8.2	8			1	208.61
31246		100 / 32 / 100	108	35	108	31	10.8	15.5	15.5	8	8.2	8			1	208.61
31247		100 / 40 / 100	108	42	108	31	11	15.5	15.5	8	8	8			1	208.61
31248		100 / 50 / 100	108	54	108	31	11.3	15.5	15.5	8	7.8	8			1	208.61
31249		100 / 65 / 100	108	76.1	108	31	12.4	15.5	15.5	8	7.1	8			1	208.61
31250		100 / 80 / 100	108	88.9	108	31	13.5	15.5	15.5	8	7.5	8			1	208.61

N: New, available as of April 2016

Geberit Mapress Stainless Steel T-piece with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R [°]	d1, ø [mm]	H [cm]	L [cm]	I [cm]	I1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
31454	12	15	1/2	15	3.4	6.4	3.2	3.2	1.2	1.2	6	1	12.50
31455	15	18	1/2	18	3.6	6.8	3.4	3.4	1.4	1.4	6	1	12.50
31458	20	22	3/4	22	4.2	7.4	3.7	3.7	1.6	1.6		1	14.59
31461	25	28	1	28	4.8	8.4	4.2	4.2	1.9	1.9		1	16.68
31464	32	35	1 1/4	35	5.4	10	5	5	2.4	2.4		1	19.82

Geberit Mapress Stainless Steel T-piece with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp [°]	d1, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31304	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2	50	10		12.50
31305	15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4	50	10		12.50
31306	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4	5		1	12.50
31307	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6	80	20		14.59
31308	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6	50	10		14.59
31309	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9	90	10		16.68
31310	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9	50	10		16.68
31311	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9	6		1	16.68
31312	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4	40	5		19.82
31313	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4	30	5		19.82
31316	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7	24	4		22.42
31317	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7	24	4		22.42
31320	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4	30	2		28.15
31321	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4	14	2		28.15
31324	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4	10		1	28.15
31326	65 / 20 / 65	76.1	3/4	76.1	23	7.9	11.5	11.5	6.2	6.4	6.2	4		1	166.86
31329	65 / 50 / 65	76.1	2	76.1	23	8.9	11.5	11.5	6.2	6.6	6.2			1	166.86
31331	80 / 20 / 80	88.9	3/4	88.9	26	8.8	13	13	7	7.3	7			1	177.31
31334	80 / 50 / 80	88.9	2	88.9	26	9.6	13	13	7	7.3	7			1	177.31
31336	100 / 20 / 100	108	3/4	108	31	10.5	15.5	15.5	8	9	8			1	208.61
31339	100 / 50 / 100	108	2	108	31	11.5	15.5	15.5	8	9.2	8			1	208.61

1.2.8 Adaptors, permanent

Geberit Mepla adaptor to Geberit Mapress, with plain end



Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10


Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Material		Gunmetal (CuSn5Zn5Pb2-C)								
Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.508.00.5	12	16	15	5.9	1.2		50	10		7.34
602.507.00.5	15	20	15	6.1	1.1		50	10	1	7.34
602.508.00.5	15	20	18	6.1	1.2		50	10		7.34
602.509.00.5	15	20	22	6.2	1.2		50	10	1	7.34
603.508.00.5	20	26	22	6.7	1.2		25	5		11.43
604.508.00.5	25	32	28	6.6	1.3		25	5		12.95
605.508.00.5	32	40	35	7.5	1.3		25	5		16.18
606.508.00.5	40	50	42	10.1	3.1	480	10	2		31.97
607.508.00.5	50	63	54	13.6	3.2	180	10		1	49.24

Geberit Mapress Stainless Steel adaptor with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
33009 N	10 / 15	12	1/2	1.9	3.6	25	5		10.06	
31726	12	15	3/8	1.8	3.8	25	5		9.36	
31703	12 / 15	15	1/2	2.1	4.1	200	20		9.36	
31714	12 / 20	15	3/4	2.3	4.3	50	10		9.36	
31704	15	18	1/2	2.2	4.2	200	20		10.41	


N: New, available as of April 2016

Adaptors, permanent

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31705	15 / 20	18	3/4	2.4	4.4	100	20		10.41
31715	20 / 15	22	1/2	2.1	4.2	100	20		11.45
31707	20	22	3/4	2.3	4.4	140	20		11.45
31716	20 / 25	22	1	2.5	4.6	50	10		11.45
31717	25 / 20	28	3/4	2.3	4.6	100	20		14.59
31708	25	28	1	2.3	4.8	80	20		14.59
31718	25 / 32	28	1 1/4	2.5	4.8	50	10		14.59
31719	32 / 25	35	1	2.5	5.1	50	5		20.86
31709	32	35	1 1/4	2.7	5.3	70	5		20.86
31720	32 / 40	35	1 1/2	2.7	5.3	40	5		20.86
31721	40 / 32	42	1 1/4	2.7	5.7	36	4		30.86
31710	40	42	1 1/2	2.7	5.7	40	4		30.86
31722	50 / 40	54	1 1/2	4.8	8.3	30		1	41.72
31711	50	54	2	5.4	8.9	24		1	41.72
31713	65	76.1	2 1/2	7	12.3	4		1	189.63
31724	80	88.9	3	7.7	13.7	5		1	284.54

N: New, available as of April 2016

Geberit Mapress Stainless Steel adaptor with male thread G



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	G ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.		
31731	12	15	3/4	1.5	3.5	1	18.48		
31732	15	18	3/4	1.7	3.8	1	21.30		
31733	20	22	1	1.9	4	1	28.33		
31734	25	28	1 1/4	1.8	4.1	1	50.84		
31735	32	35	1 1/2	2.1	4.7	1	52.44		
31736	40	42	1 3/4	2.2	5.2	1	76.74		
31737	50	54	2 3/8	2.8	6.3	1	136.62		

Geberit Mapress Stainless Steel adaptor with male thread and plain end




Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
31932	12	15	1/2	5.7	25	5		9.36	
31933	15	18	1/2	5.7	25	5		10.41	
31936	20	22	3/4	5.9	25	5		11.45	
31937	25	28	1	6.6	25	5		14.59	
31938	32	35	1 1/4	8	6		1	20.86	
31939	40	42	1 1/2	9.1	10		1	30.86	
31940	50	54	2	10.2	5		1	41.72	

Geberit Mapress Stainless Steel adaptor with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)									
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.		
33010	N	10 / 15	12	1/2	3.4	0.4	10		1	10.90	
31801		12	15	3/8	3.5	0.5			1	9.36	
31802		12 / 15	15	1/2	3.7	0.4	200	20		9.36	
31823		12 / 20	15	3/4	3.8	0.3	25	5		9.36	
31803		15	18	1/2	3.7	0.4	100	20		10.41	
31804		15 / 20	18	3/4	3.8	0.3	50	10		10.41	
31805		20 / 15	22	1/2	3.6	0.2	100	20		11.45	
31806		20	22	3/4	3.9	0.3	100	20		11.45	
31824		20 / 25	22	1	4.2	0.4	50	10		11.45	
31807		25 / 15	28	1/2	3.8	0.2	25	5		14.59	
31819		25 / 20	28	3/4	3.9	0.3	50	10		14.59	
31809		25	28	1	4.4	0.4	80	10		14.59	
31825		25 / 32	28	1 1/4	4.6	0.4	25	5		14.59	
31820		32 / 25	35	1	4.5	0.2	50	5		20.86	
31811		32	35	1 1/4	4.9	0.4	50	5		20.86	
31826		32 / 40	35	1 1/2	4.9	0.4	25	5		20.86	
31821		40 / 32	42	1 1/4	5.1	0.2	40	4		30.86	
31814		40	42	1 1/2	5.3	0.4	40	4		30.86	
31822		50 / 40	54	1 1/2	7.1	2.2	25		1	41.72	
31818		50	54	2	6.2	0.4	26		1	41.72	

N: New, available as of April 2016

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long

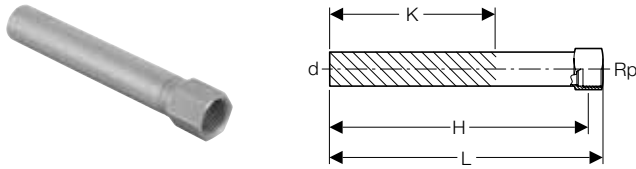

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12	15	1/2	13.5	14.8	9	25	5		9.36
90933	15	18	1/2	13.5	14.8	9	12		1	10.41
90934	15	18	3/4	13.3	15.2	9			1	10.41
90935	20	22	1/2	13.9	14.8	8.9	12		1	11.45
90936	20	22	3/4	13.7	15.2	8.7	10		1	11.45

Geberit Mapress Stainless Steel adaptor with female thread and plain end




Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.		
33846	20 / 15	22	1/2	4.5	5.8	5	1	13.26		
33848	25 / 15	28	1/2	5.3	6.6	5	1	17.28		
33850	32 / 15	35	1/2	5.6	6.9	5	1	22.90		
33852	40 / 15	42	1/2	6.1	7.4	5	1	29.34		
33854	50 / 15	54	1/2	6.6	7.9	5	1	34.96		
33860	65 / 15	76.1	1/2	9.1	10.4		1	122.16		
33862	80 / 15	88.9	1/2	10	11.3		1	173.59		
33864	100 / 15	108	1/2	12.1	13.4		1	209.34		

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread

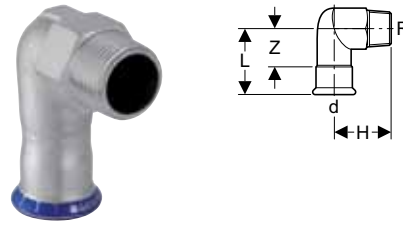

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)									
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
33833	12 / 15	15	1/2	3.7	5.7	3.7	50	10		13.56	
33834	15	18	1/2	3.9	5.7	3.7	50	10		14.59	
33835	20	22	3/4	4.6	6	3.9	50	10		18.78	
33836	25	28	1	5.4	6.7	4.4	50	10		23.98	
33837	32	35	1 1/4	6.3	7.5	4.9	10		1	32.33	
33838	40	42	1 1/2	6.7	8.3	5.3	10		1	56.44	
33839	50	54	2	7.8	9.4	5.9	10		1	72.08	

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread

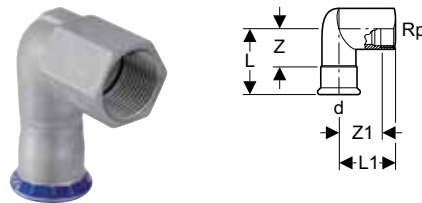

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)									
----------	--	--------------------------------	--	--	--	--	--	--	--	--	--

Adaptors and connections, detachable

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33802	12	15	3/8	5.7	3.4	3.7	2.4			1	12.85
33803	12 / 15	15	1/2	5.7	3.7	3.7	2.4	100	20		13.03
33804	15	18	1/2	5.7	3.9	3.7	2.6	50	10		16.30
33805	20	22	3/4	6	4.6	3.9	3.1	50	10		18.78
33806	25	28	1	6.7	5.4	4.3	3.7	40	10		23.98
33807	32	35	1 1/4	7.5	6.3	4.9	4.4	25	5		32.33

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end

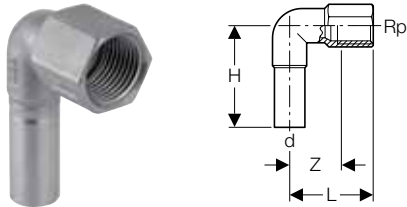

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33203	12 / 15	15	1/2	5.3	3.6	2.3	25	5	13.03

1.2.9 Adaptors and connections, detachable

Geberit Mapress Stainless Steel union



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
35320	12	15	3/4	6.6	2.6	10	1	32.07
35321	15	18	3/4	6.9	2.9	10	1	36.36
35322	20	22	1	7.2	3	10	1	45.06
35323	25	28	1 1/4	7.7	3.1	25	1	69.22
35324	32	35	1 1/2	8.2	3	10	1	72.58
35325	40	42	1 3/4	9.5	3.5	10	1	104.59
35326	50	54	2 3/8	11.3	4.3	5	1	173.70

Geberit Mapress Stainless Steel union, union nut made of CrNi steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
35390	12	15	3/4	6.6	2.6	1	39.59
35391	15	18	3/4	6.9	2.9	1	45.10
35392	20	22	1	7.2	3	1	55.81
35393	25	28	1 1/4	7.7	3.1	1	85.48
35394	32	35	1 1/2	8.2	3	1	89.39
35395	40	42	1 3/4	9.5	3.5	1	128.70
35396	50	54	2 3/8	11.3	4.3	1	213.59

Geberit Mapress Stainless Steel adaptor with union nut



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \emptyset [mm]	G ["]	di, \emptyset [mm]	L [cm]	Z	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35042	12	15	1/2	10	5.1	2.5	6		1	14.59
35032	12	15	3/4	13	3.7	1.1	50	10		11.45
35072	12	15	1 1/4	26	4.3	1.3			1	11.45
35033	15	18	3/4	13	3.7	1.1	50	10		11.97
35034	20	22	1	20	4	1.1	50	10		16.68
35044	20	22	1 1/4	26	4.3	1.3	6		1	16.68
35045	20	22	1 1/2	32	4.4	1.3			1	16.68
35046	25	28	1	20	4	1.3	25	5		21.89
35035	25	28	1 1/4	26	4.4	1.3	50	10		21.89
35047	25	28	1 1/2	32	4.6	1.3			1	21.89
35036	32	35	1 1/2	32	4.8	1.3	52	4		23.98
35037	40	42	1 3/4	39	5.2	1.3	52	4		31.94
35038	50	54	2 3/8	51	5.8	1.5	20		1	43.11
35039	65	76.1	3	73	9.9	3.3			1	177.31
35040	80	88.9	3 1/2	84	11.1	3.7			1	229.46

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \emptyset [mm]	G ["]	di, \emptyset [mm]	L [cm]	Z	SU3 [pc.]	SU1 [pc.]	GBP/pc.
35132	12	15	3/4	13	3.7	1.1	10	1	14.79
35134	20	22	1	20	4	1.1	6	1	18.47
35075	25	28	1 1/2	32	4.4	1.3	5	1	42.12

Geberit Mapress Stainless Steel adaptor union with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35330	12 / 15	15	1/2	3/4	4.4	6.4	50	2		16.68
35331	12 / 20	15	3/4	3/4	4.6	6.6	6		1	16.68
35332	15	18	1/2	3/4	4.4	6.4	50	2		18.03
35333	15 / 20	18	3/4	3/4	4.6	6.6	10		1	18.03
35334	20 / 15	22	1/2	1	4.6	6.7	24	2		18.78
35335	20	22	3/4	1	4.7	6.8	10	2		18.78
35336	20 / 25	22	1	1	5.2	7.3	24	2		18.78
35337	25	28	1	1 1/4	5.5	7.8	40	2		31.28
35338	32	35	1 1/4	1 1/2	5.9	8.5	30	2		40.66
35339	40	42	1 1/2	1 3/4	6	9	25		1	46.85
35340	50	54	2	2 3/8	6.8	10.3	15		1	81.35

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35360	12 / 15	15	1/2	3/4	4.4	6.4	50	2		21.89
35361	12 / 20	15	3/4	3/4	4.6	6.6	6		1	21.89
35362	15	18	1/2	3/4	4.4	6.4	50	2		25.02
35363	15 / 20	18	3/4	3/4	4.6	6.6	6		1	25.02
35364	20 / 15	22	1/2	1	4.6	6.7	10		1	26.06
35365	20	22	3/4	1	4.7	6.8	50	2		26.06
35366	20 / 25	22	1	1	5.2	7.3	6		1	26.06
35367	25	28	1	1 1/4	5.5	7.8	40	2		39.61
35368	32	35	1 1/4	1 1/2	5.9	8.5	10		1	52.96
35369	40	42	1 1/2	1 3/4	6	9	20		1	61.27
35370	50	54	2	2 3/8	6.8	10.3	15		1	105.90

Geberit Mapress Stainless Steel adaptor union with male thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
35400	12	15	1/2	3/4	8.6	10	1	21.89
35402	15	18	1/2	3/4	8.6		1	25.02
35405	20	22	3/4	1	9.2	6	1	26.06
35407	25	28	1	1 1/4	10.1	6	1	39.61
35408	32	35	1 1/4	1 1/2	10.9		1	52.96
35409	40	42	1 1/2	1 3/4	11.5		1	61.27
35410	50	54	2	2 3/8	12.9	6	1	105.90

Geberit Mapress Stainless Steel adaptor union with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35300	12 / 15	15	1/2	3/4	5.9	2.6	10		1	16.68
35301	12 / 20	15	3/4	3/4	6.1	2.6	6		1	16.68
35302	15	18	1/2	3/4	5.9	2.6	10		1	18.03
35303	15 / 20	18	3/4	3/4	6.1	2.6	6		1	18.03
35304	20	22	3/4	1	6.3	2.7	50	2		18.78
35305	20 / 25	22	1	1	6.6	2.8	25	5		18.78
35306	25	28	1	1 1/4	7.1	3.1	30	2		31.28
35307	32	35	1 1/4	1 1/2	7.7	3.2	24	2		40.66
35308	40	42	1 1/2	1 3/4	8.2	3.3	10		1	46.85
35309	50	54	2	2 3/8	9.5	3.7	10		1	81.35

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
35350	12 / 15	15	1/2	3/4	5.9	2.6	10	1	21.89
35357	12 / 20	15	3/4	3/4	6.1	2.6		1	21.89
35351	15	18	1/2	3/4	5.9	2.6	6	1	25.02
35358	15 / 20	18	3/4	3/4	6.1	2.6		1	25.02
35352	20	22	3/4	1	6.3	2.7	10	1	26.06
35359	20 / 25	22	1	1	6.6	2.8	6	1	26.06
35353	25	28	1	1 1/4	7.1	3.1	6	1	39.61
35354	32	35	1 1/4	1 1/2	7.7	3.2	5	1	52.96
35355	40	42	1 1/2	1 3/4	8.2	3.3	5	1	61.27
35356	50	54	2	2 3/8	9.5	3.7		1	105.90

Geberit Mapress Stainless Steel adaptor union with female thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
35380	12	15	1/2	3/4	5.9	8.1		1	21.89
35382	15	18	1/2	3/4	5.9	8.1		1	25.02
35384	20	22	3/4	1	6.4	8.7		1	26.06
35386	25	28	1	1 1/4	6.7	9.4	6	1	39.61
35387	32	35	1 1/4	1 1/2	7.2	10.1		1	52.96
35388	40	42	1 1/2	1 3/4	7.7	10.7		1	61.27
35389	50	54	2	2 3/8	8.4	12	5	1	105.90

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end




Application purposes

- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- Only suitable for liquid media

Technical data

Material		DR brass CW602N						
Art. no.	DN	DN	d, ø [mm]	L [cm]	PN [bar]	SU2 [pc.]	GBP/pc.	
22421	12	16	15	6.4	10	2	12.18	
22431	12	20	15	6.7	10	2	14.21	
22422	15	16	18	6.4	10	2	13.20	
22432	15	20	18	6.7	10	2	15.23	
22423	20	16	22	6.8	10	2	14.21	
22433	20	20	22	6.8	10	2	16.23	
22444	25	25	28	6.8	10	2	22.32	

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket

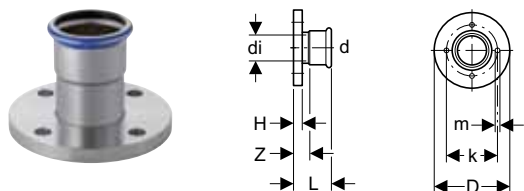

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Type A (smooth sealing surface), EN 1092-1

Characteristics

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [cm]	m [cm]	H [cm]	L [cm]	Z [cm]	n [pc.]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
33702	15 / 12	15	13	9.5	6.5	1.4	1.1	5.5	3.6	4	10 / 16		1	38.07
33703	15	18	16	9.5	6.5	1.4	1.1	5.7	3.7	4	10 / 16		1	39.11
33704	20	22	19.6	10.5	7.5	1.4	1.2	5.7	3.6	4	10 / 16		1	46.26
33705	25	28	25.6	11.5	8.5	1.4	1.4	6.5	4.2	4	10 / 16		1	56.56
33706	32	35	32	14	10	1.8	1.5	6.9	4.3	4	10 / 16		1	79.88
33707	40	42	39	15	11	1.8	1.6	7.7	4.7	4	10 / 16	5	1	93.69
33708	50	54	51	16.5	12.5	1.8	1.8	8.7	5.2	4	10 / 16		1	115.54
33709	65	76.1	72.1	18.5	14.5	1.8	1.8	12.6	7.3	4	10 / 16		1	182.50
33710	80	88.9	84.9	20	16	1.8	2	14.3	8.3	8	10 / 16		1	216.89
33711	100	108	104	22	18	1.8	2	16.8	9.3	8	10 / 16		1	257.44

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flange PN 10/16, with plain end

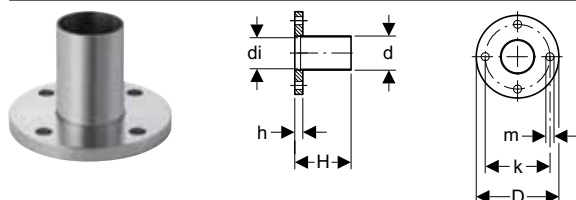

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10
- Silicone-free (LABS-free)
- Type A (smooth sealing surface), EN 1092-1

Characteristics


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [cm]	m [cm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
33728	50	54	54.5	16.5	12.5	1.8	8.7	1.8	4	10 / 16	1	157.35
33729	65	76.1	72.1	18.5	14.5	1.8	12.6	1.8	4	10 / 16	1	180.13
33730	80	88.9	84.9	20	16	1.8	14.3	2	8	10 / 16	1	210.87
33731	100	108	104	22	18	1.8	16.8	2	8	10 / 16	1	252.63

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6**Application purposes**

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------


Art. no.	DN	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	6	1	57.24
36151	32	35	40	32	7	13.5	0.6	6	1	82.41
36152	40	42	47	39	8	13.5	0.6	6	1	96.16
36153	50	54	59	51	9	13.5	0.8	6	1	119.05
36154	65	76.1	78	73.1	11	13.5	0.8	6	1	187.72
36155	80	88.9	91	84.9	12.8	13.5	1	6	1	219.78
36156	100	108	110	104	14.8	13.5	1	6	1	263.29

To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16**Application purposes**

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	10 / 16	1	53.23
36142	25	28	32	25.6	6.8	13.5	0.6	10 / 16	1	64.92
36143	32	35	40	32	7.8	13.5	0.6	10 / 16	1	93.78
36144	40	42	47	39	8.8	13.5	0.6	10 / 16	1	109.07
36145	50	54	59	51	10.2	13.5	0.8	10 / 16	1	135.04
36146	65	76.1	78	72.1	12.2	13.5	0.8	10 / 16	1	212.96
36147	80	88.9	91	84.9	13.8	13.5	1	10 / 16	1	249.31
36148	100	108	110	104	15.8	13.5	1	10 / 16	1	298.64

To order additionally


- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

1.2.10 Compensators

Geberit Mapress Stainless Steel axial expansion fitting with pressing sockets

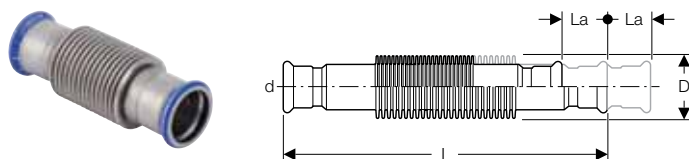

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For remote network heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water
- For ultrapure water (except pharmaceutical water)
- For rainwater with a pH value of > 6.0
- For grey and black water with pH value > 6.0
- For technical building systems, industry and shipbuilding

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Leaky if unpressed
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, \varnothing [mm]	D [cm]	La [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
33922	12	15	2.7	+/- 0.7	15.1		1	84.02
33923	15	18	2.7	+/- 0.7	14.7		1	88.74
33924	20	22	3.5	+/- 1.1	10.6		1	102.47
33925	25	28	4.2	+/- 1	12		1	110.67
33926	32	35	4.2	+/- 1	13.9	5	1	124.41
33927	40	42	5.6	+/- 1.1	14.9		1	223.48
33928	50	54	7.2	+/- 1.4	17.6		1	254.62
33929	65	76.1	9.4	+/- 2.2	26.2		1	316.46
33930	80	88.9	10.5	+/- 2.3	28.6		1	355.84
33931	100	108	13.6	+/- 2.3	54.2		1	722.91

1.2.11 Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends



Application purposes

- For industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media \rightarrow p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media \rightarrow p. 10

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, \varnothing [mm]	D [cm]	L [cm]	l [cm]	SU1 [pc.]	GBP/pc.	
90980	12	15	2.5	45	16.5	1	43.82	
90981	15	18	3	45	16.5	1	44.90	
90982	20	22	3.4	45	16.5	1	47.09	
90983	25	28	3.8	45	16.5	1	51.48	
90984	32	35	4.5	45	16.5	1	62.42	
90985	40	42	5.4	45	16.5	1	74.48	
90986	50	54	7	45	16.5	1	82.15	
90987	65	76.1	8.9	45	16.5	1	186.18	
90988	80	88.9	10.8	45	16.5	1	208.10	
90989	100	108	13.3	45	16.5	1	230.00	

1.2.12 Sealings

Geberit Mapress Stainless Steel cap



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33212	12	15	2.3	0.3	25	5		8.19
33213	15	18	2.3	0.3	25	5		9.84
33214	20	22	2.4	0.3	25	5		10.63
33215	25	28	2.6	0.3	25	5		12.80
33216	32	35	2.9	0.3	10		1	17.88
33217	40	42	3.3	0.3	6		1	38.93
33218	50	54	3.8	0.3	6		1	42.84
33219	65	76.1	6	0.7	10		1	54.51
33220	80	88.9	6.7	0.7			1	66.40
33221	100	108	8.2	0.7			1	91.96

1.2.13 Connections

Geberit Mapress Stainless Steel elbow tap connector 90°

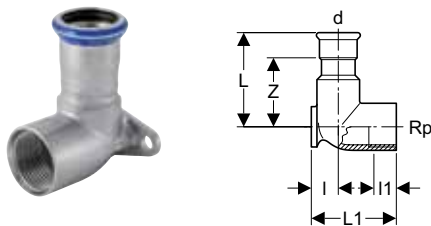

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)										
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33013	10 / 15	12	1/2	4.6	4.3	1.3	1.5	2.9			1	16.32
33403	12 / 15	15	1/2	5	4.3	1.3	1.5	3	120	20		16.12
33405	15	18	1/2	5	4.3	1.3	1.5	3	100	20		17.36
33407	20	22	3/4	5.4	5.1	1.7	1.6	3.3	50	10		24.95

Geberit Mapress Stainless Steel T-elbow tap connector 90°, offset



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33423	12 / 15	15	1/2	5	6.5	3.5	1.5	3	50	10		15.96
33425	15	18	1/2	5	6.5	3.5	1.5	3	50	10		17.23
33427	20	22	3/4	5.4	6.5	3.1	1.6	3.3	10		1	24.70

Geberit Mapress Stainless Steel corner elbow 90°, offset



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
33503	12 / 15 / 12	15	1/2	15	6	4.3	1.3	1.5	4	10	1	24.77

1.3 Geberit Mapress Stainless Steel, Gas

1.3.3 System pipes 1.4401 (AISI 316)

Geberit Mapress Stainless Steel system pipe, CrNiMo, small bundle (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39202	12	15	13	1	6	120		6.90
39203	15	18	16	1	6	90		8.14
39204	20	22	19.6	1.2	6	60		11.01
39205	25	28	25.6	1.2	6	60		13.58
39206	32	35	32	1.5	6	30		19.99
39207	40	42	39	1.5	6	30		24.60
39208	50	54	51	1.5	6	30		31.29
39209	65	76.1	72.1	2	6		6	63.44
39210	80	88.9	84.9	2	6		6	72.27
39211	100	108	104	2	6		6	87.07

1.3.1 Pipe nipples

Geberit Mapress Stainless Steel pipe nipple (gas)



Application purposes

- For shortest construction length between two pressing sockets
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5	5	1	2.50
32051	15	18	16	1	5		1	2.71
32052	20	22	19.6	1.2	5.2	5	1	2.90
32053	25	28	25.6	1.2	5.6		1	3.69
32054	32	35	32	1.5	6.2		1	4.74
32055	40	42	39	1.5	8		1	6.71
32056	50	54	51	1.5	9		1	8.71
32057	65	76.1	72.1	2	13.6		1	35.87
32058	80	88.9	84.9	2	15		1	41.82
32059	100	108	104	2	18		1	58.53

1.3.2 Couplings

Geberit Mapress Stainless Steel coupling (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34101	12	15	4.8	0.8	40	4		5.57
34102	15	18	4.8	0.8	40	4		5.98
34103	20	22	5	0.8	40	4		7.00
34104	25	28	5.4	0.8	24	4		7.93
34105	32	35	6.2	1	10	2		9.80
34106	40	42	7.1	1.1	10	2		13.40
34107	50	54	8.3	1.3	10	2		16.08
34248	65	76.1	14.1	3.5	4		1	79.51
34249	80	88.9	16.2	4.2	4		1	90.89
34250	100	108	19.4	4.4			1	115.46

Geberit Mapress Stainless Steel slip coupling (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34108	12	15	2.5	8	3		2		9.24
34109	15	18	2.5	8	3		2		9.62
34110	20	22	2.5	8.4	3.4	20	2		10.98
34111	25	28	3	9.1	3.1	20	4		12.72
34112	32	35	3	10.2	4.2	10		1	14.22
34113	40	42	4	12	4			1	16.53
34114	50	54	4	14	6			1	21.10
34162	65	76.1	6	23	11			1	74.58
34121	80	88.9	7	26	12			1	122.38
34122	100	108	8	31	15			1	159.04

1.3.4 Reducers

Geberit Mapress Stainless Steel reducer with plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34115	15 / 12	18	15	3.5	5.5		4		6.17
34116	20 / 12	22	15	3.9	5.9		4		6.79
34117	20 / 15	22	18	3.7	5.7		4		6.79


N: New, available as of April 2016

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34118	25 / 12	28	15	4.6	6.6		4		7.72
34119	25 / 15	28	18	4.4	6.4		4		7.72
34120	25 / 20	28	22	3.9	6	32	4		7.72
34123	32 / 20	35	22	5	7.1	16	2		13.09
34124	32 / 25	35	28	4.5	6.8	12	2		13.09
34127	N 40 / 20	42	22	6.1	8.2			1	13.25
34128	40 / 25	42	28	6	8.3	12	2		23.82
34129	40 / 32	42	35	5.1	7.7	12	2		23.82
34132	N 50 / 20	54	22	7.4	9.5			1	18.75
34133	50 / 25	54	28	8.7	11			1	33.33
34134	50 / 32	54	35	8	10.6	8	2		33.33
34135	50 / 40	54	42	6.2	9.2	8	2		33.33
34296	65 / 50	76.1	54	11.1	14.6	10		1	71.44
34297	80 / 50	88.9	54	12.8	16.3			1	76.20
34298	80 / 65	88.9	76.1	10.8	16.1			1	76.20
34259	100 / 50	108	54	13.7	17.2			1	83.34
34260	100 / 65	108	76.1	13.1	18.4			1	83.34
34261	100 / 80	108	88.9	14.3	20.3			1	83.34

N: New, available as of April 2016

1.3.5 Bends

Geberit Mapress Stainless Steel bend 45° (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34014	12	15	3.6	1.6		4		8.55
34015	15	18	3.7	1.7		4		9.62
34016	20	22	4.2	2.1	24	4		11.67
34017	25	28	4.8	2.5	20	4		14.77
34193	32	35	4.3	1.7	10	2		22.03
34194	40	42	5.1	2.1	12	2		34.53
34195	50	54	6.2	2.7	10		1	47.62
34447	65	76.1	10.1	4.8			1	122.02
34448	80	88.9	11.7	5.7			1	149.56
34449	100	108	14.3	6.8			1	204.48

Geberit Mapress Stainless Steel bend 45° with plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34021	12	15	4.5	3.6	1.6		4		8.55
34022	15	18	4.2	3.7	1.7		4		9.62
34023	20	22	5.2	4.2	2.1	32	4		11.67
34024	25	28	5.6	4.8	2.5	20	4		14.77
34196	32	35	5.3	4.3	1.7	10	2		22.03
34197	40	42	6.1	5.1	2.1	12	2		34.53
34198	50	54	7.3	6.2	2.7	10	2		47.62
34450	65	76.1	11.1	10.1	4.8	6		1	122.02
34451	80	88.9	13	11.7	5.7			1	149.56
34452	100	108	15.7	14.3	6.8			1	204.48

Geberit Mapress Stainless Steel bend 90° (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34000	12	15	4.9	2.9		32	4		8.55
34001	15	18	5.3	3.3		32	4		9.62
34002	20	22	6.1	4	640	40	4		11.67
34003	25	28	7.2	4.9	360	20	4		14.77
34187	32	35	6.8	4.2		20	4		22.03
34188	40	42	8	5		16	4		34.53
34189	50	54	10	6.5		20		1	47.62
34441	65	76.1	15.7	10.4	32	8		1	122.02
34442	80	88.9	18.4	12.4		4		1	149.56
34443	100	108	22.6	15.1		3		1	204.48

Geberit Mapress Stainless Steel bend 90° with plain end (gas)

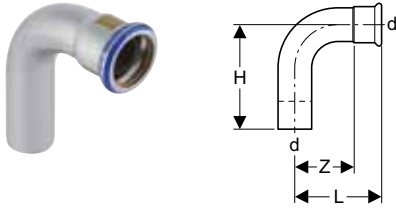

Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34007	12	15	5.9	4.9	2.9	32	4		8.55
34008	15	18	6.1	5.3	3.3	32	4		9.62
34009	20	22	7	6.1	4	24	4		11.67
34010	25	28	7.9	7.2	4.9	16	4		14.77
34190	32	35	7.7	6.8	4.2	10	2		22.03
34191	40	42	9	8	5	12	2		34.53
34192	50	54	11.1	10	6.5	10		1	47.62
34444	65	76.1	16.6	15.7	10.4	4		1	122.02
34445	80	88.9	19.4	18.4	12.4			1	149.56
34446	100	108	24	22.6	15.1			1	204.48

Geberit Mapress Stainless Steel bend with plain ends 15° (gas)



Application purposes


- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
30892	12	15	6	12.2	2.1	8.3		1	8.65
30893	15	18	5.5	12.8	1.5	8.8	5	1	8.84
30894	20	22	5	12.4	0.7	8.1	5	1	9.36
30905	25	28	4.5	13.4	0	8.9	5	1	9.70
30906	32	35	7.3	22.2	2	16.9	10	1	20.33

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
30907	40	42	8.9	28	3	22.1	5	1	25.02
30908	50	54	12.2	33.7	4.5	26	5	1	31.28
30009	65	76.1	8.4	20.4	0	12		1	98.03
30010	80	88.9	9.5	22	0	12.5		1	110.55
30011	100	108	11.7	25.4	0	13.7		1	132.46

Geberit Mapress Stainless Steel bend with plain ends 30° (gas)




Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
30932	12	15	6	12.2	2.1	8.3		1	8.65
30933	15	18	5.5	12.8	1.6	8.9	10	1	8.84
30934	20	22	5	12.4	0.6	8	5	1	9.36
30935	25	28	5.1	13	0	7.9	10	1	9.70
30936	32	35	8	21.4	2	15.4	5	1	20.33
30937	40	42	9.9	27.2	3	20.3	5	1	25.02
30938	50	54	13.4	32.6	5.5	24.7	5	1	31.28
30029	65	76.1	9.7	21.7	0	12		1	98.03
30030	80	88.9	11.1	23.6	0	12.5		1	110.55
30031	100	108	13.6	27.3	0	13.7		1	132.46

Geberit Mapress Stainless Steel bend with plain ends 45° (gas)



Application purposes


- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
30872	12	15	6.2	12	1.9	7.7	5	1	8.65
30873	15	18	5.8	12.4	1.6	8.2	5	1	8.84
30874	20	22	5.6	12	0.7	7.1	5	1	9.36
30875	25	28	5.8	12.2	0.2	6.6	5	1	9.70
30876	32	35	9.4	20.6	2	13.2	5	1	20.33
30877	40	42	11.4	26.2	0.1	14.9		1	25.02
30878	50	54	14.6	32.1	3.7	21.2		1	31.28
30049	65	76.1	11.1	23	0	11.9		1	98.03
30050	80	88.9	13	25.2	0	12.2		1	110.55
30051	100	108	15.7	29.4	0	13.7		1	132.46

Geberit Mapress Stainless Steel bend with plain ends 60° (gas)

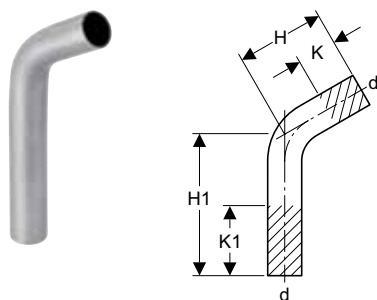

Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU1 [pc.]	GBP/pc.
30942	12	15	6	12.2	2.1	8.3	1	8.65
30943	15	18	6.2	12.2	1.6	7.6	1	8.84
30944	20	22	6	11.8	0.5	6.3	1	9.36
30955	25	28	6.3	12.1	0	5.8	1	9.70
30956	32	35	9.7	20.3	2	12.6	1	20.33
30957	40	42	12	25.6	3	16.6	1	25.02
30958	50	54	16.2	30.6	5.5	19.9	1	31.28

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU1 [pc.]	GBP/pc.
30069	65	76.1	12.6	24.6	0	12	1	98.03
30070	80	88.9	14.6	27.1	0	12.5	1	110.55
30071	100	108	18	31.7	0	13.7	1	132.46

Geberit Mapress Stainless Steel bend with plain ends 90° (gas)

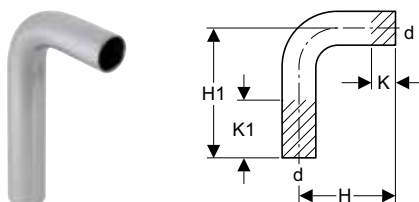

Application purposes


- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30402	12	15	7	12	2.2	7.2	5750	50	10		8.65
30403	15	18	7	12	1.7	6.7		50	10		8.84
30404	20	22	7	12	0	5		50	10		9.36
30405	25	28	8	12	0	4		50	10		9.70
30406	32	35	12	20	2	10		10		1	20.33
30407	40	42	15	25	3	13		8		1	25.02
30408	50	54	20	30	5.5	15.5		10		1	31.28
30089	65	76.1	16.6	28.6	0	12				1	98.03
30090	80	88.9	19.4	31.9	0	12.5				1	110.55
30091	100	108	24	37.7	0	13.7				1	132.46

Geberit Mapress Stainless Steel pipe bridge (gas)

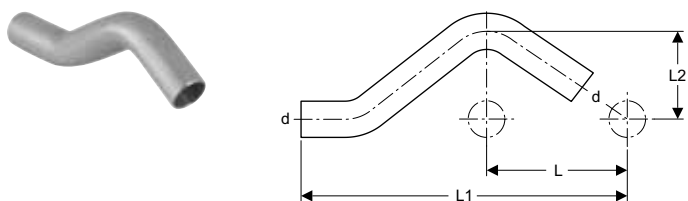

Application purposes

- For crossing parallel pipes with distance L
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30802	12	15	5.7	15.8	3		10	1	7.46
30803	15	18	6	16.6	3.1		10	1	7.72
30804	20	22	6.5	17.9	3.3		10	1	8.76
30805	25	28	7.3	20.6	3.6		5	1	10.61

1.3.6 T-pieces

Geberit Mapress Stainless Steel T-piece, equal (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)										
Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
34028	12	15	6.4	3.9	3.2	1.2	1.9		4		12.92	
34029	15	18	6.8	4.1	3.4	1.4	2.1		4		14.73	
34030	20	22	7.4	4.4	3.7	1.6	2.3	20	4		15.83	
34031	25	28	8.4	5	4.2	1.9	2.7	20	4		18.58	
34032	32	35	10	5.7	5	2.4	3.1	8	2		23.46	
34033	40	42	11.4	6.5	5.7	2.7	3.5			1	33.35	
34034	50	54	13.8	7.7	6.9	3.4	4.2			1	39.85	
34285	65	76.1	23	11	11.5	6.2	5.7			1	219.53	
34286	80	88.9	26	12.8	13	7	6.8			1	240.20	
34287	100	108	31	15.3	15.5	8	7.8			1	296.48	

Geberit Mapress Stainless Steel T-piece, reduced (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34035	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4			1	13.33
34036	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6		4		14.28
34037	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6		4		14.28
34038	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9			1	17.24
34039	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9		4		17.24
34040	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9	32	4		17.24
34041	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4			1	21.06
34042	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4			1	21.43
34043	32 / 20 / 35	35	22	35	10	5	5	5	2.4	2.9	2.4	6		1	21.43
34044	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4	8		1	21.43
34140	N 40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7			1	27.25
34141	N 40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7			1	27.25
34045	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7			1	30.95
34046	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7			1	30.95
34047	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7			1	30.95
34048	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4			1	35.72
34049	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4			1	35.72
34050	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4			1	35.72
34051	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4			1	35.72
34097	65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2			1	185.76
34098	80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7			1	202.44
34099	100 / 50 / 100	108	54	108	31	11.3	15.5	15.5	8	7.8	8			1	238.16

N: New, available as of April 2016

Geberit Mapress Stainless Steel T-piece with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.		DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34271	N	100 / 50 / 100	108	2	108	31	11.5	15.5	15.5	8	9.2	8			1	208.00
34052		12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2			1	14.28
34053		15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4		4		14.28
34054		15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4			1	14.28
34055		20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6	20	4		16.68
34056		20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6			1	16.68
34057		25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9		4		19.04
34058		25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9			1	19.04
34059		32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4			1	19.45
34060		32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4			1	22.61
34061		40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7			1	25.58
34126	N	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7			1	23.21
34063		50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4	6		1	32.15
34264		50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4			1	32.15
34265		50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4			1	32.15
34266		65 / 20 / 65	76.1	3/4	76.1	23	7.9	11.5	11.5	6.2	6.4	6.2			1	190.53
34267		65 / 50 / 65	76.1	2	76.1	23	8.9	11.5	11.5	6.2	6.6	6.2			1	190.53
34268		80 / 20 / 80	88.9	3/4	88.9	26	8.8	13	13	7	7.3	7			1	202.44
34269		80 / 50 / 80	88.9	2	88.9	26	9.6	13	13	7	7.3	7			1	202.44
34270		100 / 20 / 100	108	3/4	108	31	10.5	15.5	15.5	8	9	8			1	238.16

N: New, available as of April 2016

1.3.7 Adaptors, permanent

Geberit Mapress Stainless Steel adaptor to cutting ring connection (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	I [cm]	SU2 [pc.]	GBP/pc.
34355	12	15	6	8	5.1	2	11.77

Geberit Mapress Stainless Steel adaptor with male thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34066	12 / 15	15	1/2	2.1	4.1	20	4		10.70
34142	N 12 / 20	15	3/4	2.3	4.3			1	9.50
34067	15	18	1/2	2.2	4.2	32	4		11.89
34143	N 15 / 20	18	3/4	2.4	4.4			1	10.25
34069	20 / 15	22	1/2	2.1	4.2	40	4		13.09
34070	20	22	3/4	2.3	4.4	40	4		13.09
34346	20 / 25	22	1	2.5	4.6	32	4		13.09
34068	25 / 20	28	3/4	2.3	4.6	24	4		16.68
34071	25	28	1	2.3	4.8	24	4		16.68
34075	32 / 25	35	1	2.5	5.1	24	4		23.82
34072	32	35	1 1/4	2.7	5.3	10	2		23.82

N: New, available as of April 2016

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34076	32 / 25	35	1 1/2	2.7	5.3	24	4		23.82
34073	40	42	1 1/2	2.7	5.7	10	2		35.23
34074	50	54	2	5.4	8.9	10		1	47.62
34077	65	76.1	2 1/2	7	12.3			1	216.50
34078	80	88.9	3	7.7	13.7			1	324.86

N: New, available as of April 2016

Geberit Mapress Stainless Steel adaptor with male thread and plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12	15	1/2	5.7	25	5		9.36
31933	15	18	1/2	5.7	25	5		10.41
31936	20	22	3/4	5.9	25	5		11.45
31937	25	28	1	6.6	25	5		14.59
31938	32	35	1 1/4	8	6		1	20.86
31939	40	42	1 1/2	9.1	10		1	30.86
31940	50	54	2	10.2	5		1	41.72

Geberit Mapress Stainless Steel adaptor with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34083	12 / 15	15	1/2	3.7	0.4		4		10.70
34169	N 12 / 20	15	3/4	3.8	0.3			1	9.50
34084	15	18	1/2	3.7	0.4		4		11.89
34170	N 15 / 20	18	3/4	3.8	0.3			1	10.25
34086	20 / 15	22	1/2	3.6	0.2	40	4		13.09
34087	20	22	3/4	3.9	0.3	40	4		13.09
34347	20 / 25	22	1	4.2	0.4		4		13.09
34089	25	28	1	4.4	0.4	28	4		16.68
34093	32 / 25	35	1	4.5	0.2			1	23.82
34090	32	35	1 1/4	4.9	0.4			1	23.82
34091	40	42	1 1/2	5.3	0.4			1	35.23
34092	50	54	2	6.2	0.4			1	47.62

N: New, available as of April 2016

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12	15	1/2	13.5	14.8	9	25	5		9.36
90933	15	18	1/2	13.5	14.8	9	12		1	10.41
90934	15	18	3/4	13.3	15.2	9			1	10.41
90935	20	22	1/2	13.9	14.8	8.9	12		1	11.45
90936	20	22	3/4	13.7	15.2	8.7	10		1	11.45

Geberit Mapress Stainless Steel adaptor with female thread and plain end (gas)



Application purposes


- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33846	20 / 15	22	1/2	4.5	5.8	5	1	13.26
33848	25 / 15	28	1/2	5.3	6.6	5	1	17.28
33850	32 / 15	35	1/2	5.6	6.9	5	1	22.90
33852	40 / 15	42	1/2	6.1	7.4	5	1	29.34
33854	50 / 15	54	1/2	6.6	7.9	5	1	34.96
33860	65 / 15	76.1	1/2	9.1	10.4		1	122.16
33862	80 / 15	88.9	1/2	10	11.3		1	173.59
33864	100 / 15	108	1/2	12.1	13.4		1	209.34

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34149	12 / 15	15	1/2	3.7	5.7	3.7			1	14.96
34150	15	18	1/2	3.9	5.7	3.7			1	16.12
34151	20	22	3/4	4.6	6	3.9	24	4		20.67
34154	N 25 / 20	28	3/4	4.6	5.8	3.5		4		27.18
34152	25	28	1	5.4	6.7	4.4	20	4		26.40
34153	32	35	1 1/4	6.3	7.5	4.9			1	37.74

N: New, available as of April 2016

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34144	12 / 15	15	1/2	5.7	3.7	3.7	2.4			1	17.09
34145	15	18	1/2	5.7	3.9	3.7	2.6			1	19.30
34146	20	22	3/4	6	4.6	3.9	3.1	20	4		23.02
34147	25	28	1	6.7	5.4	4.3	3.7	20	4		29.81
34148	32	35	1 1/4	7.5	6.3	4.9	4.4			1	50.92

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end (gas)

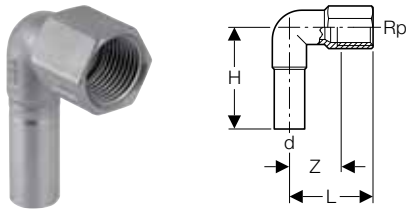

Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33203	12 / 15	15	1/2	5.3	3.6	2.3	25	5	13.03

1.3.8 Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor union with male thread (gas)



Application purposes

- For connecting to house supply pipes
- For connecting measuring devices, control valves and protection devices
- For connecting gas devices
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Flat gasket made of Centellen® HD 3822
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
34430	12 / 15	15	1/2	3/4	4.4	6.4	1	19.04
34431	12 / 20	15	3/4	3/4	4.6	6.6	1	19.04
34432	15	18	1/2	3/4	4.4	6.4	1	20.59
34433	15 / 20	18	3/4	3/4	4.6	6.6	1	20.59
34434	20 / 15	22	1/2	1	4.6	6.7	1	21.43
34435	20	22	3/4	1	4.7	6.8	1	21.43
34436	20 / 25	22	1	1	5.2	7.3	1	21.43
34437	25	28	1	1 1/4	5.5	7.8	1	35.72
34438	32	35	1 1/4	1 1/2	5.9	8.5	1	46.43
34439	40	42	1 1/2	1 3/4	6	9	1	53.48
34440	50	54	2	2 3/8	6.8	10.3	1	92.89

Geberit Mapress Stainless Steel adaptor union with female thread (gas)



Application purposes

- For connecting to house supply pipes
- For connecting measuring devices, control valves and protection devices
- For connecting gas devices
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Flat gasket made of Centellen® HD 3822
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
34400	12 / 15	15	1/2	3/4	5.9	2.6	1	19.04
34401	12 / 20	15	3/4	3/4	6.1	2.6	1	19.04
34402	15	18	1/2	3/4	5.9	2.6	1	20.59
34403	15 / 20	18	3/4	3/4	6.1	2.6	1	20.59
34404	20	22	3/4	1	6.3	2.7	1	21.43
34405	20 / 25	22	1	1	6.6	2.8	1	21.43
34406	25	28	1	1 1/4	7.1	3.1	1	35.72
34407	32	35	1 1/4	1 1/2	7.7	3.2	1	46.43
34408	40	42	1 1/2	1 3/4	8.2	3.3	1	53.48
34409	50	54	2	2 3/8	9.5	3.7	1	92.89

Geberit Mapress Stainless Steel adaptor with union nut (gas)**Application purposes**


- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Conical sealing
- Marked in yellow
- Seal ring made of HNBR, yellow
- O-ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34156	12	15	7/8	3.3	0.9			1	15.39
34158	20	22	1 1/8	4.2	1.6			1	17.78
34161	20	22	1 3/8	4	1.9		4		17.78
34159	25	28	1 3/8	4.5	1.7	20	4		23.12

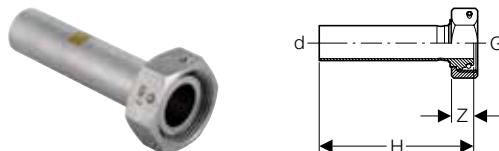Geberit Mapress Stainless Steel adaptor with union nut and plain end (gas)**Application purposes**


- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Conical sealing
- Marked in yellow
- Union nut with hole for sealing
- O-ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	G ["]	H [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
34214	25	28	1 3/8	12.8	2.4	10	1	21.45	

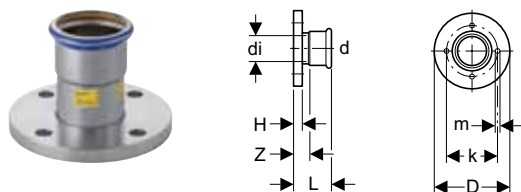Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (gas)**Application purposes**

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed

- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug
- Type A (smooth sealing surface), EN 1092-1


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)												
Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [cm]	m [cm]	H [cm]	L [cm]	Z [cm]	n [pc.]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34178	25	22	19.6	11.5	8.5	1.4	1.4	5.7	3.6	4	10 / 16		1	54.17
34180	25	28	25.6	11.5	8.5	1.4	1.4	6.5	3.2	4	10 / 16	10	1	66.29
34181	32	35	32	14	10	1.8	1.5	6.9	3.2	4	10 / 16		1	93.52
34182	40	42	39	15	11	1.8	1.6	7.7	3.3	4	10 / 16		1	109.71
34183	50	54	51	16.5	12.5	1.8	1.8	8.7	3.4	4	10 / 16		1	135.32
34184	65	76.1	72.1	18.5	14.5	1.8	1.8	12.6	3.5	4	10 / 16		1	222.41
34185	80	88.9	84.9	20	16	1.8	2	14.3	4.6	8	10 / 16		1	263.64
34186	100	108	104	22	18	1.8	2	16.8	9.3	8	10 / 16		1	312.73

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flange PN 10/16, with plain end (gas)

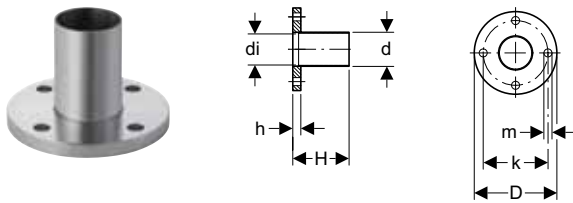

Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Type A (smooth sealing surface), EN 1092-1

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	D [cm]	k [cm]	m [cm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
33728	50	54	54.5	16.5	12.5	1.8	8.7	1.8	4	10 / 16	1	157.35
33729	65	76.1	72.1	18.5	14.5	1.8	12.6	1.8	4	10 / 16	1	180.13
33730	80	88.9	84.9	20	16	1.8	14.3	2	8	10 / 16	1	210.87
33731	100	108	104	22	18	1.8	16.8	2	8	10 / 16	1	252.63

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flange PN 10/16, with plain end (gas)

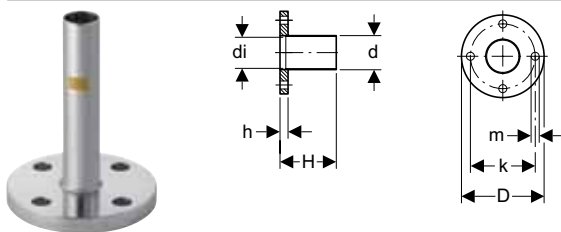

Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Marked in yellow
- Type A (smooth sealing surface), EN 1092-1


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	D [cm]	k [cm]	m [cm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
33725	25	28	28	11.5	8.5	1.4	15	1.4	4	10 / 16	1	67.69

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6 (gas)**Application purposes**

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------


Art. no.	DN	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	6	1	57.24
36151	32	35	40	32	7	13.5	0.6	6	1	82.41
36152	40	42	47	39	8	13.5	0.6	6	1	96.16
36153	50	54	59	51	9	13.5	0.8	6	1	119.05
36154	65	76.1	78	73.1	11	13.5	0.8	6	1	187.72
36155	80	88.9	91	84.9	12.8	13.5	1	6	1	219.78
36156	100	108	110	104	14.8	13.5	1	6	1	263.29

To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 1016 (gas)**Application purposes**

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	10 / 16	1	53.23
36142	25	28	32	25.6	6.8	13.5	0.6	10 / 16	1	64.92
36143	32	35	40	32	7.8	13.5	0.6	10 / 16	1	93.78
36144	40	42	47	39	8.8	13.5	0.6	10 / 16	1	109.07
36145	50	54	59	51	10.2	13.5	0.8	10 / 16	1	135.04
36146	65	76.1	78	72.1	12.2	13.5	0.8	10 / 16	1	212.96
36147	80	88.9	91	84.9	13.8	13.5	1	10 / 16	1	249.31
36148	100	108	110	104	15.8	13.5	1	10 / 16	1	298.64

To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

1.3.9 Sealings

Geberit Mapress Stainless Steel cap (gas)



Application purposes

- For natural and liquefied gases
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material					CrNiMo steel 1.4401 (EN 10088)			
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
34462	12	15	2.3	0.3	4		8.84	
34463	15	18	2.3	0.3	4		10.65	
34464	20	22	2.4	0.3	4		11.12	
34465	25	28	2.6	0.3		1	13.86	
34466	32	35	2.9	0.3		1	19.39	
34467	40	42	3.3	0.3		1	42.17	
34468	50	54	3.8	0.3		1	46.41	
34469	65	76.1	6	0.7		1	54.54	
34470	80	88.9	6.7	0.7		1	60.57	
34471	100	108	8.2	0.7		1	67.39	

1.3.10 Connections

Geberit Mapress Stainless Steel elbow tap connector 90° (gas)

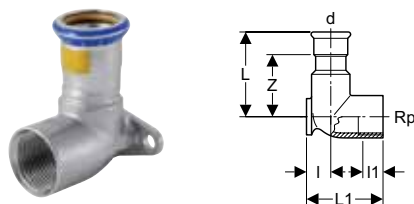

Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

- Marked in yellow
- Two fastening points
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Characteristics

- Pressing indicator
- Leaky if unpressed

Technical data

Material										CrNiMo steel 1.4401 (EN 10088)			
Art. no.	DN	d, ø [mm]	Rp [°]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
34136	12	15	1/2	5	4.3	1.3	1.5	3			1	18.88	
34137	15	18	1/2	5	4.3	1.3	1.5	3		4		20.38	
34139	N	20	1/2	5.4	4.7	1.7	1.6	2.9		4		26.50	
34138	20	22	3/4	5.4	5.1	1.7	1.6	3.3	20	4		29.17	

N: New, available as of April 2016

Geberit Mapress Stainless Steel elbow tap connector 90° for gas metres (gas)**Application purposes**

- For connecting one- and two-pipe gas metres
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points for circular hole, \varnothing 50 mm
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	Rp ["]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
91097	20	22	3/4	3.5	5.1	1.7	1.6	1.4	1	26.38
91099	20 / 25	22	1	6.5	5.8	3	2.2	3.7	1	18.21
91098	25 / 20	28	3/4	4.4	6.5	3	1.6	2.1	1	27.49
91100	25	28	1	6.5	6.1	3	2.2	4	1	18.98

Geberit Mapress Stainless Steel elbow tap connector 90° for gas metres, with plain end (gas)**Application purposes**

- For connecting one- and two-pipe gas metres
- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Marked in yellow
- Two fastening points for circular hole, \varnothing 50 mm

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	Rp ["]	H [cm]	L [cm]	l [cm]	l1 [cm]	SU1 [pc.]	GBP/pc.
91102	25	28	1	15	6.1	3	2.2	1	27.61

Geberit Mapress mounting bracket for gas metre

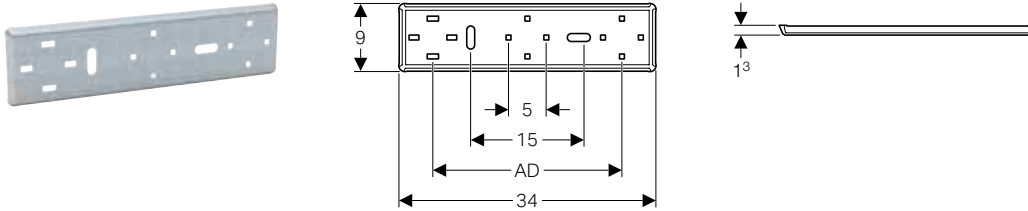

Application purposes

- For one- and two-pipe gas metres

Characteristics

- Connecting distance adjustable by ± 3 mm at the gas metre
- Zinc-plated
- Circular hole, \varnothing 50 mm

Technical data

Material	Steel
----------	-------

Scope of delivery

- Fastening material


Art. no.	AD [cm]	SU1 [pc.]	GBP/pc.
91096	25	1	15.83

1.4 Geberit Mapress Stainless Steel, silicone-free

1.4.2 System pipes 1.4401 (AISI 316)

1.4.1 Couplings

Geberit Mapress Stainless Steel system pipe, CrNiMo, small bundle (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 μ m
Thermal expansion	0.0165 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39202	12	15	13	1	6	120		6.90
39203	15	18	16	1	6	90		8.14
39204	20	22	19.6	1.2	6	60		11.01
39205	25	28	25.6	1.2	6	60		13.58
39206	32	35	32	1.5	6	30		19.99
39207	40	42	39	1.5	6	30		24.60
39208	50	54	51	1.5	6	30		31.29
39209	65	76.1	72.1	2	6		6	63.44
39210	80	88.9	84.9	2	6		6	72.27
39211	100	108	104	2	6		6	87.07

Geberit Mapress Stainless Steel coupling (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
82002	12	15	4.8	0.8	20	1	5.14
82003	15	18	4.8	0.8	80	1	5.50
82004	20	22	5	0.8	50	1	6.43
82005	25	28	5.4	0.8	40	1	7.27
82006	32	35	6.2	1	10	1	9.02
82007	40	42	7.1	1.1	10	1	12.32
82008	50	54	8.3	1.3	10	1	14.77
82009	65	76.1	14.1	3.5	4	1	73.13
82010	80	88.9	16.2	4.2	4	1	83.57
82011	100	108	19.4	4.4		1	106.18

Geberit Mapress Stainless Steel slip coupling (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
82102	12	15	2.5	8	3		1	8.51
82103	15	18	2.5	8	3		1	8.84
82104	20	22	2.5	8.4	3.4		1	10.09
82105	25	28	3	9.1	3.1	20	1	11.69
82106	32	35	3	10.2	4.2		1	13.07
82107	40	42	4	12	4	15	1	15.20
82108	50	54	4	14	6	18	1	19.40
82109	65	76.1	6	23	11		1	107.98
82110	80	88.9	7	26	12		1	121.91
82111	100	108	8	31	15		1	146.27

1.4.3 Reducers

Geberit Mapress Stainless Steel reducer with plain end (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
82303	15 / 12	18	15	3.5	5.5	40	1	6.06
82305	20 / 12	22	15	3.9	5.9	40	1	6.71
82306	20 / 15	22	18	3.7	5.7	40	1	6.71
82307	25 / 12	28	15	4.6	6.6	30	1	7.66
82308	25 / 15	28	18	4.4	6.4	30	1	7.66
82309	25 / 20	28	22	3.9	6	32	1	7.66
82310	32 / 12	35	15	5.5	7.5		1	12.05
82311	32 / 15	35	18	5.4	7.4		1	12.05
82312	32 / 20	35	22	5	7.1	16	1	12.05
82313	32 / 25	35	28	4.5	6.8	12	1	12.05
82314	40 / 12	42	15	6.1	8.1		1	21.89
82315	40 / 15	42	18	6	8		1	21.89
82316	40 / 20	42	22	6.1	8.2		1	21.89
82317	40 / 25	42	28	6	8.3	12	1	21.89
82318	40 / 32	42	35	5.1	7.7	12	1	21.89
82319	50 / 12	54	15	7.7	9.7		1	30.67
82320	50 / 15	54	18	7.6	9.6		1	30.67
82321	50 / 20	54	22	7.4	9.5		1	30.67
82322	50 / 25	54	28	8.7	11	10	1	30.67
82323	50 / 32	54	35	8	10.6	8	1	30.67
82324	50 / 40	54	42	6.2	9.2	8	1	30.67
82331	65 / 50	76.1	54	11.1	14.6	10	1	69.46
82338	80 / 50	88.9	54	12.8	16.3		1	74.87
82339	80 / 65	88.9	76.1	10.8	16.1		1	74.87
82345	100 / 50	108	54	13.7	17.2		1	78.84
82346	100 / 65	108	76.1	13.1	18.4		1	78.84
82348	100 / 80	108	88.9	14.3	20.3		1	78.84

1.4.4 Bends

Geberit Mapress Stainless Steel bend 45° (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
80602	12	15	3.6	1.6	70	1	8.30	
80603	15	18	3.7	1.7	50	1	9.34	
80604	20	22	4.2	2.1	30	1	11.35	
80605	25	28	4.8	2.5	20	1	14.36	
82606	32	35	4.3	1.7	10	1	20.24	
82607	40	42	5.1	2.1	12	1	31.76	
82608	50	54	6.2	2.7	10	1	43.80	
82609	65	76.1	10.1	4.8		1	118.62	
82610	80	88.9	11.7	5.7		1	142.37	
82611	100	108	14.3	6.8		1	195.10	

Geberit Mapress Stainless Steel bend 45° with plain end (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
80702	12	15	4.5	3.6	1.6	80	1	8.30
80703	15	18	4.2	3.7	1.7	60	1	9.34
80704	20	22	5.2	4.2	2.1	40	1	11.35
80705	25	28	5.6	4.8	2.5	20	1	14.36
82706	32	35	5.3	4.3	1.7	10	1	20.24
82707	40	42	6.1	5.1	2.1	12	1	31.76
82708	50	54	7.3	6.2	2.7	10	1	43.80
82709	65	76.1	11.1	10.1	4.8		1	118.62
82710	80	88.9	13	11.7	5.7		1	142.37
82711	100	108	15.7	14.3	6.8		1	195.10

Geberit Mapress Stainless Steel bend 90° (silicone-free)



Application purposes


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
80102	12	15	4.9	2.9	70	1	8.30	
80103	15	18	5.3	3.3	50	1	9.34	
80104	20	22	6.1	4	30	1	11.35	
80105	25	28	7.2	4.9	20	1	14.36	
81106	32	35	6.8	4.2	20	1	20.24	
81107	40	42	8	5	16	1	31.76	
81108	50	54	10	6.5	20	1	43.80	
81109	65	76.1	15.7	10.4	8	1	118.62	
81110	80	88.9	18.4	12.4	5	1	142.37	
81111	100	108	22.6	15.1	3	1	195.10	

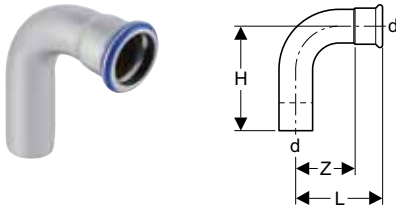Geberit Mapress Stainless Steel bend 90° with plain end (silicone-free)**Application purposes**


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
80302	12	15	5.9	4.9	2.9	70	1	8.30	
80303	15	18	6.1	5.3	3.3	60	1	9.34	
80304	20	22	7	6.1	4	30	1	11.35	
80305	25	28	7.9	7.2	4.9	20	1	14.36	
83306	32	35	7.7	6.8	4.2	10	1	20.24	
83307	40	42	9	8	5	12	1	31.76	
83308	50	54	11.1	10	6.5	10	1	43.80	
83309	65	76.1	16.6	15.7	10.4		1	118.62	
83310	80	88.9	19.4	18.4	12.4		1	142.37	
83311	100	108	24	22.6	15.1		1	195.10	

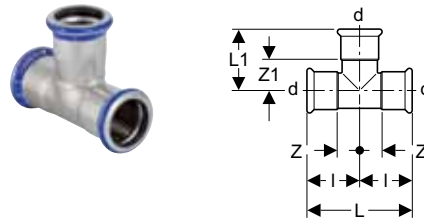1.4.5 T-pieces**Geberit Mapress Stainless Steel T-piece, equal (silicone-free)****Application purposes**

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)									
Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
81002	12	15	6.4	3.9	3.2	1.2	1.9	32	1	11.89	
81003	15	18	6.8	4.1	3.4	1.4	2.1	24	1	13.55	
81004	20	22	7.4	4.4	3.7	1.6	2.3	20	1	14.56	
81005	25	28	8.4	5	4.2	1.9	2.7	20	1	17.10	
81006	32	35	10	5.7	5	2.4	3.1	8	1	21.60	
81007	40	42	11.4	6.5	5.7	2.7	3.5	18	1	30.68	
81008	50	54	13.8	7.7	6.9	3.4	4.2	25	1	36.66	
81009	65	76.1	23	11	11.5	6.2	5.7		1	201.90	
81010	80	88.9	26	12.8	13	7	6.8		1	220.91	
81011	100	108	31	15.3	15.5	8	7.8		1	272.66	

Geberit Mapress Stainless Steel T-piece, reduced (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
81204	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4	40	1	12.26
81206	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	30	1	13.14
81207	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	30	1	13.14
81209	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	20	1	15.87
81210	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	20	1	15.87
81211	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9	20	1	15.87
81212	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4		1	19.37
81213	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4		1	19.70
81214	32 / 20 / 32	35	22	35	10	5	5	5	2.4	2.9	2.4	10	1	19.70
81215	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4	10	1	19.70
81216	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	28.46
81217	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	28.46
81218	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7		1	28.46
81219	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	12	1	28.46
81220	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	12	1	28.46
81221	50 / 12 / 50	54	15	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4		1	32.85
81222	50 / 15 / 50	54	18	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4		1	32.85
81223	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4	10	1	32.85
81224	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4	10	1	32.85
81225	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4	10	1	32.85
81226	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4		1	32.85
81229	65 / 20 / 65	76.1	22	76.1	23	7.7	11.5	11.5	6.2	5.6	6.2		1	170.85
81230	65 / 25 / 65	76.1	28	76.1	23	7.9	11.5	11.5	6.2	5.6	6.2		1	170.85
81231	65 / 32 / 65	76.1	35	76.1	23	8.1	11.5	11.5	6.2	5.5	6.2		1	170.85
81232	65 / 40 / 65	76.1	42	76.1	23	8.1	11.5	11.5	6.2	5.1	6.2		1	170.85
81233	65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2		1	170.85
81236	80 / 20 / 80	88.9	22	88.9	26	8.5	13	13	7	6.4	7		1	186.16
81237	80 / 25 / 80	88.9	28	88.9	26	8.7	13	13	7	6.4	7		1	186.16
81238	80 / 32 / 80	88.9	35	88.9	26	9	13	13	7	6.4	7		1	186.16
81239	80 / 40 / 80	88.9	42	88.9	26	9.2	13	13	7	6.2	7		1	186.16
81240	80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7		1	186.16
81241	80 / 65 / 80	88.9	76.1	88.9	26	11.4	13	13	7	6.1	7		1	186.16
81244	100 / 20 / 100	108	22	108	31	10.3	15.5	15.5	8	8.2	8		1	219.03
81245	100 / 25 / 100	108	28	108	31	10.5	15.5	15.5	8	8.2	8		1	219.03
81246	100 / 32 / 100	108	35	108	31	10.8	15.5	15.5	8	8.2	8		1	219.03
81247	100 / 40 / 100	108	42	108	31	11	15.5	15.5	8	8	8		1	219.03
81248	100 / 50 / 100	108	54	108	31	11.3	15.5	15.5	8	7.8	8		1	219.03
81249	100 / 65 / 100	108	76.1	108	31	12.4	15.5	15.5	8	7.1	8		1	219.03
81250	100 / 80 / 100	108	88.9	108	31	13.5	15.5	15.5	8	7.5	8		1	219.03

Geberit Mapress Stainless Steel T-piece with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	R ["]	d1, \emptyset [mm]	H [cm]	L [cm]	I [cm]	I1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
81454	12	15	1/2	15	3.4	6.4	3.2	3.2	1.2	1.2	1	13.14
81455	15	18	1/2	18	3.6	6.8	3.4	3.4	1.4	1.4	1	13.14
81458	20	22	3/4	22	4.2	7.4	3.7	3.7	1.6	1.6	1	15.31
81461	25	28	1	28	4.8	8.4	4.2	4.2	1.9	1.9	1	17.50

Geberit Mapress Stainless Steel T-piece with female thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	Rp ["]	d1, \emptyset [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
81304	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2	24	1	13.14
81305	15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4	15	1	13.14
81306	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4		1	13.14
81307	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6	20	1	15.31
81308	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6		1	15.31
81309	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9	16	1	17.50
81310	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9		1	17.50
81311	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9		1	17.50
81312	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4	20	1	20.80
81313	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4	10	1	20.80
81316	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7	12	1	23.54
81317	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7		1	23.54
81320	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4	16	1	29.56
81321	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4		1	29.56
81324	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4		1	29.56
81326	65 / 20 / 65	76.1	3/4	76.1	23	7.9	11.5	11.5	6.2	6.4	6.2		1	175.23
81331	80 / 20 / 80	88.9	3/4	88.9	26	8.8	13	13	7	7.3	7		1	186.16
81334	80 / 50 / 80	88.9	2	88.9	26	9.6	13	13	7	7.3	7		1	186.16
81336	100 / 20 / 100	108	3/4	108	31	10.5	15.5	15.5	8	9	8		1	219.03
81339	100 / 50 / 100	108	2	108	31	11.5	15.5	15.5	8	9.2	8		1	219.03

1.4.6 Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
81726	12	15	3/8	1.8	3.8		1	9.84
81703	12 / 15	15	1/2	2.1	4.1	70	1	9.84
81714	12 / 20	15	3/4	2.3	4.3		1	9.84
81704	15	18	1/2	2.2	4.2	70	1	10.93
81705	15 / 20	18	3/4	2.4	4.4	50	1	10.93
81715	20 / 15	22	1/2	2.1	4.2	30	1	12.05
81707	20	22	3/4	2.3	4.4	40	1	12.05
81716	20 / 25	22	1	2.5	4.6		1	12.05
81717	25 / 20	28	3/4	2.3	4.6	20	1	15.31
81708	25	28	1	2.3	4.8	20	1	15.31
81718	25 / 32	28	1 1/4	2.5	4.8		1	15.31
81719	32 / 25	35	1	2.5	5.1	16	1	21.89
81709	32	35	1 1/4	2.7	5.3	10	1	21.89
81720	32 / 40	35	1 1/2	2.7	5.3		1	21.89
81721	40 / 32	42	1 1/4	2.7	5.7		1	32.41
81710	40	42	1 1/2	2.7	5.7	10	1	32.41
81722	50 / 40	54	1 1/2	4.8	8.3		1	43.80
81711	50	54	2	5.4	8.9	10	1	43.80
81713	65	76.1	2 1/2	7	12.3		1	199.10
81724	80	88.9	3	7.7	13.7		1	298.77

Geberit Mapress Stainless Steel adaptor with female thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
81802	12 / 15	15	1/2	3.7	0.4	80	1	9.84
81823	12 / 20	15	3/4	3.8	0.3		1	9.84
81803	15	18	1/2	3.7	0.4	30	1	10.93
81804	15 / 20	18	3/4	3.8	0.3		1	10.93
81805	20 / 15	22	1/2	3.6	0.2	30	1	12.05
81806	20	22	3/4	3.9	0.3	40	1	12.05
81824	20 / 25	22	1	4.2	0.4		1	12.05
81807	25 / 15	28	1/2	3.8	0.2		1	15.31
81819	25 / 20	28	3/4	3.9	0.3	25	1	15.31
81809	25	28	1	4.4	0.4	28	1	15.31
81825	25 / 32	28	1 1/4	4.6	0.4		1	15.31
81820	32 / 25	35	1	4.5	0.2		1	21.89
81811	32	35	1 1/4	4.9	0.4		1	21.89
81826	32 / 40	35	1 1/2	4.9	0.4		1	21.89
81821	40 / 32	42	1 1/4	5.1	0.2		1	32.41
81814	40	42	1 1/2	5.3	0.4	20	1	32.41
81822	50 / 40	54	1 1/2	7.1	2.2		1	43.80
81818	50	54	2	6.2	0.4	16	1	43.80

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (silicone-free)

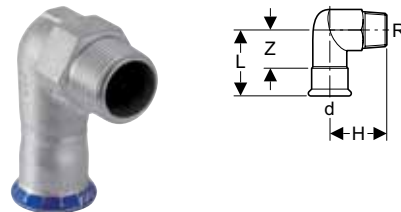

Application purposes


- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
83833	12 / 15	15	1/2	3.7	5.7	3.7	40	1	14.24
83834	15	18	1/2	3.9	5.7	3.7		1	15.31
83835	20	22	3/4	4.6	6	3.9	24	1	19.70
83836	25	28	1	5.4	6.7	4.4	20	1	25.19
83837	32	35	1 1/4	6.3	7.5	4.9		1	35.05
83838	40	42	1 1/2	6.7	8.3	5.3		1	61.61
83839	50	54	2	7.8	9.4	5.9		1	78.54

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (silicone-free)**Application purposes**

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
83803	12 / 15	15	1/2	5.3	3.7	3.7	2.4	80	1	14.04
83804	15	18	1/2	5.7	3.9	3.7	2.6		1	17.13
83805	20	22	3/4	6	4.6	3.9	3.1	20	1	19.70
83806	25	28	1	6.7	5.4	4.3	3.7	20	1	25.19
83807	32	35	1 1/4	7.5	6.3	4.9	4.4		1	35.05

1.4.7 Adaptors and connections, detachable**Geberit Mapress Stainless Steel union (silicone-free)****Application purposes**

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G [°]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
85320	12	15	3/4	6.6	2.6		1	33.67
85321	15	18	3/4	6.9	2.9		1	38.20
85322	20	22	1	7.2	3		1	47.32
85323	25	28	1 1/4	7.7	3.1	15	1	72.68
85324	32	35	1 1/2	8.2	3		1	76.23
85325	40	42	1 3/4	9.5	3.5	12	1	109.83
85326	50	54	2 3/8	11.3	4.3		1	182.39

Geberit Mapress Stainless Steel adaptor union with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
85330	12 / 15	15	1/2	3/4	4.4	6.4	20	1	17.50
85332	15	18	1/2	3/4	4.4	6.4	30	1	18.92
85333	15 / 20	18	3/4	3/4	4.6	6.6		1	18.92
85334	20 / 15	22	1/2	1	4.6	6.7		1	19.70
85335	20	22	3/4	1	4.7	6.8	24	1	19.70
85337	25	28	1	1 1/4	5.5	7.8	24	1	32.85
85338	32	35	1 1/4	1 1/2	5.9	8.5	20	1	42.71
85339	40	42	1 1/2	1 3/4	6	9	10	1	49.17
85340	50	54	2	2 3/8	6.8	10.3	12	1	85.41

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
85360	12 / 15	15	1/2	3/4	4.4	6.4	50	1	22.98
85362	15	18	1/2	3/4	4.4	6.4	30	1	26.28
85365	20	22	3/4	1	4.7	6.8		1	27.37
85367	25	28	1	1 1/4	5.5	7.8	24	1	41.60
85368	32	35	1 1/4	1 1/2	5.9	8.5		1	55.61
85369	40	42	1 1/2	1 3/4	6	9		1	64.34
85370	50	54	2	2 3/8	6.8	10.3		1	111.19

Geberit Mapress Stainless Steel adaptor union with male thread and plain end (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
35400	12	15	1/2	3/4	8.6	10	1	21.89
35402	15	18	1/2	3/4	8.6		1	25.02
35405	20	22	3/4	1	9.2	6	1	26.06
35407	25	28	1	1 1/4	10.1	6	1	39.61
35408	32	35	1 1/4	1 1/2	10.9		1	52.96
35409	40	42	1 1/2	1 3/4	11.5		1	61.27
35410	50	54	2	2 3/8	12.9	6	1	105.90

Geberit Mapress Stainless Steel adaptor union with female thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85300	12 / 15	15	1/2	3/4	5.9	2.6	1	17.50
85301	12 / 20	15	3/4	3/4	6.1	2.6	1	17.50
85302	15	18	1/2	3/4	5.9	2.6	1	18.92
85303	15 / 20	18	3/4	3/4	6.1	2.6	1	18.92
85304	20	22	3/4	1	6.3	2.7	1	19.70
85305	20 / 25	22	1	1	6.6	2.8	1	19.70
85306	25	28	1	1 1/4	7.1	3.1	1	32.85
85307	32	35	1 1/4	1 1/2	7.7	3.2	1	42.71
85308	40	42	1 1/2	1 3/4	8.2	3.3	1	49.17
85309	50	54	2	2 3/8	9.5	3.7	1	85.41

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85350	12 / 15	15	1/2	3/4	5.9	2.6	1	22.98
85351	15	18	1/2	3/4	5.9	2.6	1	26.28
85358	15 / 20	18	3/4	3/4	6.1	2.6	1	26.28
85352	20	22	3/4	1	6.3	2.7	1	27.37
85359	20 / 25	22	1	1	6.6	2.8	1	27.37
85353	25	28	1	1 1/4	7.1	3.1	1	41.60
85354	32	35	1 1/4	1 1/2	7.7	3.2	1	55.61
85355	40	42	1 1/2	1 3/4	8.2	3.3	1	64.34
85356	50	54	2	2 3/8	9.5	3.7	1	111.19

Geberit Mapress Stainless Steel adaptor union with female thread and plain end (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	H [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
35380	12	15	1/2	3/4	5.9	8.1		1	21.89
35382	15	18	1/2	3/4	5.9	8.1		1	25.02
35384	20	22	3/4	1	6.4	8.7		1	26.06
35386	25	28	1	1 1/4	6.7	9.4	6	1	39.61
35387	32	35	1 1/4	1 1/2	7.2	10.1		1	52.96
35388	40	42	1 1/2	1 3/4	7.7	10.7		1	61.27
35389	50	54	2	2 3/8	8.4	12	5	1	105.90

Geberit Mapress Stainless Steel adaptor with union nut (silicone-free)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \emptyset [mm]	G ["]	di, \emptyset [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
85042	12	15	1/2	10	5.1	2.5		1	15.31
85032	12	15	3/4	13	3.7	1.1		1	12.05
85072	12	15	1 1/4	26	4.3	1.3		1	12.05
85033	15	18	3/4	13	3.7	1.1	10	1	12.57
85034	20	22	1	20	4	1.1	15	1	17.50
85044	20	22	1 1/4	26	4.3	1.3		1	17.50
85045	20	22	1 1/2	32	4.4	1.3		1	17.50
85046	25	28	1	20	5.5	2.4		1	22.98
85035	25	28	1 1/4	26	4.4	1.3	20	1	22.98
85047	25	28	1 1/2	32	4.8	1.3		1	22.98
85036	32	35	1 1/2	32	4.6	1.3		1	25.19
85037	40	42	1 3/4	39	5.2	1.3		1	33.54
85038	50	54	2 3/8	51	5.8	1.5		1	45.25

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel (silicone-free)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Operating temperature with flat gasket EPDM	0-100 °C
Material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \emptyset [mm]	G ["]	di, \emptyset [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85132	12	15	3/4	13	3.7	1.1	1	15.52
85134	20	22	1	20	4	1.1	1	19.39
85075	25	28	1 1/2	32	4.8	1.3	1	44.23

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (silicone-free)**Application purposes**

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Type A (smooth sealing surface), EN 1092-1


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	di, \emptyset [mm]	D [cm]	k [cm]	m [cm]	H [cm]	L [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
83702	15 / 12	15	13	9.5	6.5	1.4	1.1	5.6	3.6	4	10 / 16	1	39.95
83703	15	18	16	9.5	6.5	1.4	1.1	5.7	3.7	4	10 / 16	1	41.08
83704	20	22	19.6	10.5	7.5	1.4	1.2	5.9	3.8	4	10 / 16	1	48.56
83705	25	28	25.6	11.5	8.5	1.4	1.4	6.5	4.2	4	10 / 16	1	59.38
83706	32	35	32	14	10	1.8	1.5	6.9	4.3	4	10 / 16	1	83.84
83707	40	42	39	15	11	1.8	1.6	7.7	4.7	4	10 / 16	1	98.37
83708	50	54	51	16.5	12.5	1.8	1.8	8.7	5.2	4	10 / 16	1	121.29
83709	65	76.1	72.1	18.5	14.5	1.8	1.8	12.6	7.3	4	10 / 16	1	191.63
83710	80	88.9	84.9	20	16	1.8	2	14.3	8.3	8	10 / 16	1	227.74
83711	100	108	104	22	18	1.8	2	16.8	9.3	8	10 / 16	1	270.31

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flange PN 10/16, with plain end (silicone-free)**Application purposes**

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Type A (smooth sealing surface), EN 1092-1

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	di, \emptyset [mm]	D [cm]	k [cm]	m [cm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
33728	50	54	54.5	16.5	12.5	1.8	8.7	1.8	4	10 / 16	1	157.35
33729	65	76.1	72.1	18.5	14.5	1.8	12.6	1.8	4	10 / 16	1	180.13
33730	80	88.9	84.9	20	16	1.8	14.3	2	8	10 / 16	1	210.87
33731	100	108	104	22	18	1.8	16.8	2	8	10 / 16	1	252.63

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6 (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	6	1	57.24
36151	32	35	40	32	7	13.5	0.6	6	1	82.41
36152	40	42	47	39	8	13.5	0.6	6	1	96.16
36153	50	54	59	51	9	13.5	0.8	6	1	119.05
36154	65	76.1	78	73.1	11	13.5	0.8	6	1	187.72
36155	80	88.9	91	84.9	12.8	13.5	1	6	1	219.78
36156	100	108	110	104	14.8	13.5	1	6	1	263.29


To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16 (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	10 / 16	1	53.23
36142	25	28	32	25.6	6.8	13.5	0.6	10 / 16	1	64.92
36143	32	35	40	32	7.8	13.5	0.6	10 / 16	1	93.78
36144	40	42	47	39	8.8	13.5	0.6	10 / 16	1	109.07
36145	50	54	59	51	10.2	13.5	0.8	10 / 16	1	135.04
36146	65	76.1	78	72.1	12.2	13.5	0.8	10 / 16	1	212.96
36147	80	88.9	91	84.9	13.8	13.5	1	10 / 16	1	249.31
36148	100	108	110	104	15.8	13.5	1	10 / 16	1	298.64

To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

1.4.8 Sealings

Geberit Mapress Stainless Steel cap (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)				
Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
83212	12	15	2.3	0.3	1	8.61
83213	15	18	2.3	0.3	1	10.34
83214	20	22	2.4	0.3	1	11.15
83215	25	28	2.6	0.3	1	13.44
83216	32	35	2.9	0.3	1	18.78
83217	40	42	3.3	0.3	1	40.89
83218	50	54	3.8	0.3	1	44.98

1.4.9 Connections

Geberit Mapress Stainless Steel elbow tap connector 90° (silicone-free)

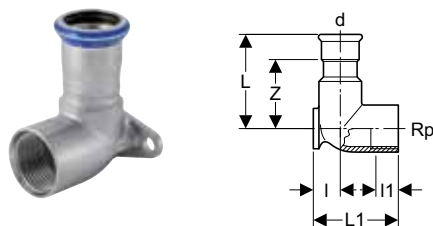

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)									
Art. no.	DN	d, \varnothing [mm]	Rp ["]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
83403	12 / 15	15	1/2	5	4.3	1.3	1.5	3	40	1	16.90
83405	15	18	1/2	5	4.3	1.3	1.5	3	15	1	18.24
83407	20	22	3/4	5.4	5.1	1.7	1.6	3.3		1	26.17

Geberit Mapress Stainless Steel T-elbow tap connector 90°, offset (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	I [cm]	I1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
83423	12 / 15	15	1/2	5	6.5	3.5	1.5	3	1	16.76
83425	15	18	1/2	5	6.5	3.5	1.5	3	1	18.08
83427	20	22	3/4	5.4	6.5	3.1	1.6	3.3	1	25.94

1.4.10 Compensators

Geberit Mapress Stainless Steel axial expansion fitting with pressing sockets (silicone-free)

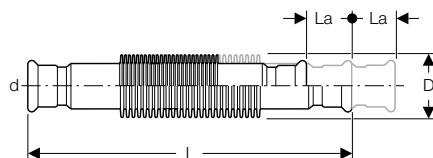

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For remote network heating water ≤ 120 °C
- For service water
- For ultrapure water (except pharmaceutical water)
- For rainwater with a pH value of > 6.0
- For grey and black water with pH value > 6.0
- For technical building systems, industry and shipbuilding

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Leaky if unpressed
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	D [cm]	La [cm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
33922	12	15	2.7	+/- 0.7	15.1		1	84.02
33923	15	18	2.7	+/- 0.7	14.7		1	88.74
33924	20	22	3.5	+/- 1.1	10.6		1	102.47
33925	25	28	4.2	+/- 1	12		1	110.67
33926	32	35	4.2	+/- 1	13.9	5	1	124.41
33927	40	42	5.6	+/- 1.1	14.9		1	223.48
33928	50	54	7.2	+/- 1.4	17.6		1	254.62
33929	65	76.1	9.4	+/- 2.2	26.2		1	316.46
33930	80	88.9	10.5	+/- 2.3	28.6		1	355.84
33931	100	108	13.6	+/- 2.3	54.2		1	722.91

1.4.11 Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends (silicone-free)



Application purposes

- For industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)					
Art. no.	DN	d, \emptyset [mm]	D [cm]	L [cm]	l [cm]	SU1 [pc.]	GBP/pc.
90980	12	15	2.5	45	16.5	1	43.82
90981	15	18	3	45	16.5	1	44.90
90982	20	22	3.4	45	16.5	1	47.09
90983	25	28	3.8	45	16.5	1	51.48
90984	32	35	4.5	45	16.5	1	62.42
90985	40	42	5.4	45	16.5	1	74.48
90986	50	54	7	45	16.5	1	82.15
90987	65	76.1	8.9	45	16.5	1	186.18
90988	80	88.9	10.8	45	16.5	1	208.10
90989	100	108	13.3	45	16.5	1	230.00

1.5 Geberit Mapress Stainless Steel, FKM, blue

1.5.2 System pipes 1.4401 (AISI 316)

Geberit Mapress Stainless Steel system pipe, CrNiMo, small bundle (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39202	12	15	13	1	6	120		6.90
39203	15	18	16	1	6	90		8.14
39204	20	22	19.6	1.2	6	60		11.01
39205	25	28	25.6	1.2	6	60		13.58
39206	32	35	32	1.5	6	30		19.99
39207	40	42	39	1.5	6	30		24.60
39208	50	54	51	1.5	6	30		31.29
39209	65	76.1	72.1	2	6		6	63.44
39210	80	88.9	84.9	2	6		6	72.27
39211	100	108	104	2	6		6	87.07

1.5.1 System pipes 1.4301 (AISI 304)

Geberit Mapress Stainless Steel system pipe, CrNi, small bundle (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Material	CrNi steel 1.4301 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.016 mm/(m · K)
Thermal conductivity, pipe	15 W/(m · K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
39602	12	15	13	1	6	120		5.84
39603	15	18	16	1	6	90		6.92
39604	20	22	19.6	1.2	6	60		9.32
39605	25	28	25.6	1.2	6	60		11.49
39606	32	35	32	1.5	6	30		17.14
39607	40	42	39	1.5	6	30		21.01
39608	50	54	51	1.5	6	30		26.54
39109	65	76.1	73.1	1.5	6		6	35.23
39110	80	88.9	85.9	1.5	6		6	40.33
39111	100	108	104	2	6		6	48.50

1.5.3 Pipe nipples

Geberit Mapress Stainless Steel pipe nipple (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	s [mm]	L [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5	5	1	2.50
32051	15	18	16	1	5		1	2.71
32052	20	22	19.6	1.2	5.2	5	1	2.90
32053	25	28	25.6	1.2	5.6		1	3.69
32054	32	35	32	1.5	6.2		1	4.74
32055	40	42	39	1.5	8		1	6.71
32056	50	54	51	1.5	9		1	8.71
32057	65	76.1	72.1	2	13.6		1	35.87
32058	80	88.9	84.9	2	15		1	41.82
32059	100	108	104	2	18		1	58.53

1.5.4 Couplings

Geberit Mapress Stainless Steel coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)					
Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
50062	12	15	4.8	0.8	1	6.67	
50063	15	18	4.8	0.8	1	7.46	
50064	20	22	5	0.8	1	8.94	
50065	25	28	5.4	0.8	1	10.19	
50066	32	35	6.2	1	1	12.70	
50067	40	42	7.1	1.1	1	17.69	
50068	50	54	8.3	1.3	1	23.57	
50071	65	76.1	14.1	3.5	1	96.25	
50072	80	88.9	16.2	4.2	1	110.28	
50073	100	108	19.4	4.4	1	158.58	

Geberit Mapress Stainless Steel slip coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)					
Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50082	12	15	2.5	8	3	1	10.10
50083	15	18	2.5	8	3	1	10.78
50084	20	22	2.5	8.4	3.4	1	12.62
50085	25	28	3	9.1	3.1	1	14.59
50086	32	35	3	10.2	4.2	1	16.78
50087	40	42	4	12	4	1	20.54
50088	50	54	4	14	6	1	28.08
50091	65	76.1	6	23	11	1	130.48
50092	80	88.9	7	26	12	1	148.39
50093	100	108	8	31	15	1	198.63

1.5.5 Reducers

Geberit Mapress Stainless Steel reducer with plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)					
Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
50133	15 / 12	18	15	3.5	5.5	1	6.70
50134	20 / 12	22	15	3.9	5.9	1	7.22
50135	20 / 15	22	18	3.7	5.7	1	7.22

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
50136	25 / 12	28	15	4.6	6.6	1	8.40
50137	25 / 15	28	18	4.4	6.4	1	8.40
50138	25 / 20	28	22	3.9	6	1	8.40
50139	32 / 12	35	15	5.5	7.5	1	13.68
50140	32 / 15	35	18	5.4	7.4	1	13.68
50141	32 / 20	35	22	5	7.1	1	13.68
50142	32 / 25	35	28	4.5	6.8	1	13.68
50143	40 / 12	42	15	6.1	8.1	1	24.71
50144	40 / 15	42	18	6	8	1	24.71
50145	40 / 20	42	22	6.1	8.2	1	24.71
50146	40 / 25	42	28	6	8.3	1	24.71
50147	40 / 32	42	35	5.1	7.7	1	24.71
50148	50 / 12	54	15	7.7	9.7	1	34.71
50149	50 / 15	54	18	7.6	9.6	1	34.71
50150	50 / 20	54	22	7.4	9.5	1	34.71
50151	50 / 25	54	28	8.7	11	1	34.71
50152	50 / 32	54	35	8	10.6	1	34.71
50153	50 / 40	54	42	6.2	9.2	1	34.71
50164	65 / 50	76.1	54	11.1	14.6	1	77.52
50167	80 / 50	88.9	54	12.8	16.3	1	81.77
50168	80 / 65	88.9	76.1	10.8	16.1	1	81.77
50169	100 / 50	108	54	13.7	17.2	1	90.96
50171	100 / 65	108	76.1	13.1	18.4	1	90.96
50172	100 / 80	108	88.9	14.3	20.3	1	90.96

1.5.6 Bends

Geberit Mapress Stainless Steel bend 15° (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)				
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50182	12	15	3	1	1	9.27
50184	20	22	3.3	1.2	1	12.96
50185	25	28	3.6	1.3	1	16.10
50186	32	35	3.2	0.6	1	24.60
50187	40	42	3.7	0.7	1	37.97
50188	50	54	4.4	0.9	1	54.44
50191	65	76.1	7.5	2.2	1	132.60
50192	80	88.9	8.5	2.5	1	166.04
50193	100	108	10.3	2.8	1	244.50

Geberit Mapress Stainless Steel bend 30° (FKM, blue)

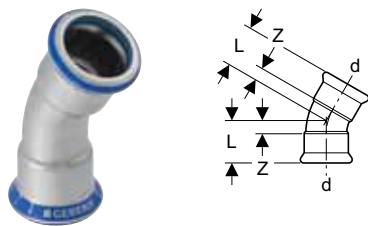

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)				
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50202	12	15	3.3	1.3	1	9.27
50204	20	22	3.7	1.6	1	12.96
50205	25	28	4.1	1.8	1	16.10
50206	32	35	3.7	1.1	1	24.60
50207	40	42	4.4	1.4	1	37.97
50208	50	54	5.2	1.7	1	54.44
50211	65	76.1	8.8	3.5	1	132.60
50212	80	88.9	10.1	4.1	1	166.04
50213	100	108	12.2	4.7	1	244.50

Geberit Mapress Stainless Steel bend 45° (FKM, blue)

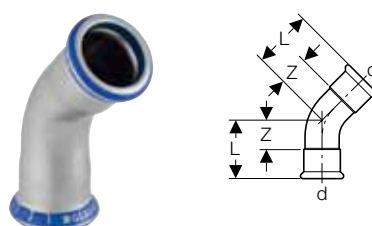

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)				
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50222	12	15	3.6	1.6	1	9.27
50223	15	18	3.7	1.7	1	10.50
50224	20	22	4.2	2.1	1	12.96
50225	25	28	4.8	2.5	1	16.10
50226	32	35	4.3	1.7	1	24.60
50227	40	42	5.1	2.1	1	37.97
50228	50	54	6.2	2.7	1	51.84
50231	65	76.1	10.1	4.8	1	132.60
50232	80	88.9	11.7	5.7	1	166.04
50233	100	108	14.3	6.8	1	244.50

Geberit Mapress Stainless Steel bend 45° with plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)					
Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50242	12	15	4.5	3.6	1.6	1	9.27
50243	15	18	4.2	3.7	1.7	1	10.50
50244	20	22	5.2	4.2	2.1	1	12.96
50245	25	28	5.6	4.8	2.5	1	16.10
50246	32	35	5.3	4.3	1.7	1	24.60
50247	40	42	6.1	5.1	2.1	1	37.97
50248	50	54	7.3	6.2	2.7	1	51.84
50251	65	76.1	11.1	10.1	4.8	1	132.60
50252	80	88.9	13	11.7	5.7	1	166.04
50253	100	108	15.7	14.3	6.8	1	244.50

Geberit Mapress Stainless Steel bend 60° (FKM, blue)

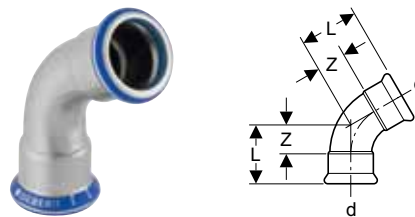

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)					
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
50262	12	15	4	2	1	9.27	
50264	20	22	4.7	2.6	1	12.96	
50265	25	28	5.4	3.1	1	16.10	
50266	32	35	5	2.4	1	24.60	
50267	40	42	5.9	2.9	1	37.97	
50268	50	54	7.2	3.7	1	54.44	
50271	65	76.1	11.7	6.4	1	132.60	
50272	80	88.9	13.6	7.6	1	166.04	
50273	100	108	16.6	9.1	1	244.50	

Geberit Mapress Stainless Steel bend 90° (FKM, blue)

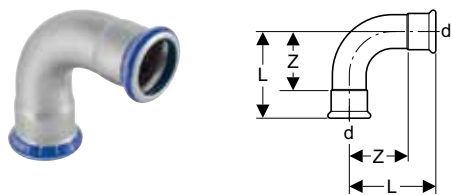

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)				
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50282	12	15	4.9	2.9	1	9.27
50283	15	18	5.3	3.3	1	10.50
50284	20	22	6.1	4	1	12.96
50285	25	28	7.2	4.9	1	16.10
50286	32	35	6.8	4.2	1	24.60
50287	40	42	8	5	1	36.17
50288	50	54	10	6.5	1	51.84
50291	65	76.1	15.7	10.4	1	132.60
50292	80	88.9	18.4	12.4	1	166.04
50293	100	108	22.6	15.1	1	244.50

Geberit Mapress Stainless Steel bend 90° with plain end (FKM, blue)

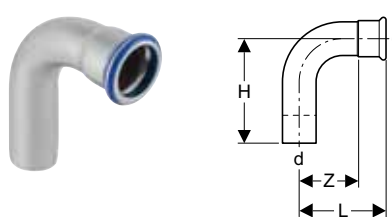

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)					
Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50312	12	15	5.9	4.9	2.9	1	9.27
50313	15	18	6.1	5.3	3.3	1	10.50
50314	20	22	7	6.1	4	1	12.96
50315	25	28	7.9	7.2	4.9	1	16.10
50316	32	35	7.7	6.8	4.2	1	24.60
50317	40	42	9	8	5	1	36.17
50318	50	54	11.1	10	6.5	1	51.84
50321	65	76.1	16.6	15.7	10.4	1	132.60
50322	80	88.9	19.4	18.4	12.4	1	166.04
50323	100	108	24	22.6	15.1	1	244.50

Geberit Mapress Stainless Steel bend with plain ends 15° (FKM, blue)




Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
30892	12	15	6	12.2	2.1	8.3		1	8.65	
30893	15	18	5.5	12.8	1.5	8.8	5	1	8.84	
30894	20	22	5	12.4	0.7	8.1	5	1	9.36	
30905	25	28	4.5	13.4	0	8.9	5	1	9.70	
30906	32	35	7.3	22.2	2	16.9	10	1	20.33	
30907	40	42	8.9	28	3	22.1	5	1	25.02	
30908	50	54	12.2	33.7	4.5	26	5	1	31.28	
30009	65	76.1	8.4	20.4	0	12		1	98.03	
30010	80	88.9	9.5	22	0	12.5		1	110.55	
30011	100	108	11.7	25.4	0	13.7		1	132.46	

Geberit Mapress Stainless Steel bend with plain ends 45° (FKM, blue)




Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
30872	12	15	6.2	12	1.9	7.7	5	1	8.65	
30873	15	18	5.8	12.4	1.6	8.2	5	1	8.84	
30874	20	22	5.6	12	0.7	7.1	5	1	9.36	
30875	25	28	5.8	12.2	0.2	6.6	5	1	9.70	
30876	32	35	9.4	20.6	2	13.2	5	1	20.33	
30877	40	42	11.4	26.2	0.1	14.9		1	25.02	
30878	50	54	14.6	32.1	3.7	21.2		1	31.28	
30049	65	76.1	11.1	23	0	11.9		1	98.03	
30050	80	88.9	13	25.2	0	12.2		1	110.55	
30051	100	108	15.7	29.4	0	13.7		1	132.46	

Geberit Mapress Stainless Steel bend with plain ends 30° (FKM, blue)




Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
30932	12	15	6	12.2	2.1	8.3		1	8.65	
30933	15	18	5.5	12.8	1.6	8.9	10	1	8.84	
30934	20	22	5	12.4	0.6	8	5	1	9.36	
30935	25	28	5.1	13	0	7.9	10	1	9.70	
30936	32	35	8	21.4	2	15.4	5	1	20.33	
30937	40	42	9.9	27.2	3	20.3	5	1	25.02	
30938	50	54	13.4	32.6	5.5	24.7	5	1	31.28	
30029	65	76.1	9.7	21.7	0	12		1	98.03	
30030	80	88.9	11.1	23.6	0	12.5		1	110.55	
30031	100	108	13.6	27.3	0	13.7		1	132.46	

Geberit Mapress Stainless Steel bend with plain ends 60° (FKM, blue)




Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
30942	12	15	6	12.2	2.1	8.3		1	8.65	
30943	15	18	6.2	12.2	1.6	7.6		1	8.84	
30944	20	22	6	11.8	0.5	6.3		1	9.36	
30955	25	28	6.3	12.1	0	5.8		1	9.70	
30956	32	35	9.7	20.3	2	12.6		1	20.33	
30957	40	42	12	25.6	3	16.6		1	25.02	
30958	50	54	16.2	30.6	5.5	19.9		1	31.28	
30069	65	76.1	12.6	24.6	0	12		1	98.03	
30070	80	88.9	14.6	27.1	0	12.5		1	110.55	
30071	100	108	18	31.7	0	13.7		1	132.46	

Geberit Mapress Stainless Steel bend with plain ends 90° (FKM, blue)

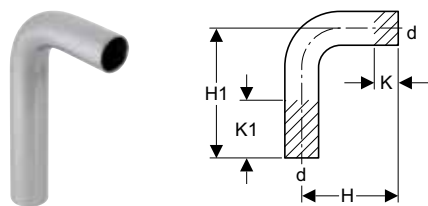


Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)									
Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30402	12	15	7	12	2.2	7.2	5750	50	10		8.65
30403	15	18	7	12	1.7	6.7		50	10		8.84
30404	20	22	7	12	0	5		50	10		9.36
30405	25	28	8	12	0	4		50	10		9.70
30406	32	35	12	20	2	10				1	20.33
30407	40	42	15	25	3	13		8		1	25.02
30408	50	54	20	30	5.5	15.5		10		1	31.28
30089	65	76.1	16.6	28.6	0	12				1	98.03
30090	80	88.9	19.4	31.9	0	12.5				1	110.55
30091	100	108	24	37.7	0	13.7				1	132.46

Geberit Mapress Stainless Steel pipe bridge (FKM, blue)

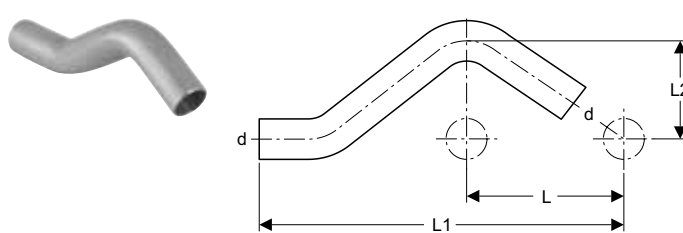

Application purposes


- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30802	12	15	5.7	15.8	3		10	1	7.46
30803	15	18	6	16.6	3.1			1	7.72
30804	20	22	6.5	17.9	3.3			1	8.76
30805	25	28	7.3	20.6	3.6		5	1	10.61

1.5.7 T-pieces

Geberit Mapress Stainless Steel T-piece, equal (FKM, blue)

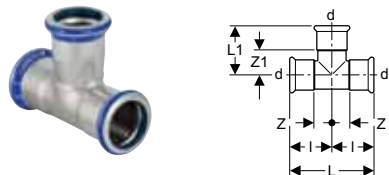

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.	
50332	12	15	6.4	3.9	3.2	1.2	1.9	1	14.24	
50333	15	18	6.8	4.1	3.4	1.4	2.1	1	16.73	
50334	20	22	7.4	4.4	3.7	1.6	2.3	1	18.77	
50335	25	28	8.4	5	4.2	1.9	2.7	1	21.83	
50336	32	35	10	5.7	5	2.4	3.1	1	27.69	
50337	40	42	11.4	6.5	5.7	2.7	3.5	1	39.31	
50338	50	54	13.8	7.7	6.9	3.4	4.2	1	48.83	
50341	65	76.1	23	11	11.5	6.2	5.7	1	241.80	
50342	80	88.9	26	12.8	13	7	6.8	1	270.33	
50343	100	108	31	15.3	15.5	8	7.8	1	370.82	

Geberit Mapress Stainless Steel T-piece, reduced (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
50356	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4	1	15.15
50357	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	1	16.91
50359	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	1	16.91
50362	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	1	20.26
50364	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	1	20.26
50366	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9	1	20.26
50367	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4	1	24.85
50368	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4	1	25.27
50369	32 / 20 / 32	35	22	35	10	5	5	5	2.4	2.9	2.4	1	25.27
50370	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4	1	25.27
50371	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	1	36.48
50372	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	1	36.48
50373	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7	1	36.48
50374	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	1	36.48
50375	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	1	36.48
50376	50 / 12 / 50	54	15	54	13.8	5.9	6.8	6.9	3.4	3.9	3.4	1	45.94
50377	50 / 15 / 50	54	18	54	13.8	5.9	6.8	6.9	3.4	3.9	3.4	1	45.94
50378	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4	1	43.76
50379	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4	1	43.76
50380	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4	1	43.76
50381	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4	1	43.76
50389	65 / 20 / 65	76.1	22	76.1	23	7.7	11.5	11.5	6.2	5.6	6.2	1	204.59
50390	65 / 25 / 65	76.1	28	76.1	23	7.9	11.5	11.5	6.2	5.6	6.2	1	204.59
50391	65 / 32 / 65	76.1	35	76.1	23	8.1	11.5	11.5	6.2	5.5	6.2	1	204.59
50392	65 / 40 / 65	76.1	42	76.1	23	8.1	11.5	11.5	6.2	5.1	6.2	1	204.59
50393	65 / 50 / 65	76.1	54	76.1	23	8.7	11.5	11.5	6.2	5.2	6.2	1	204.59
50395	80 / 20 / 80	88.9	22	88.9	26	8.5	13	13	7	6.4	7	1	227.81
50396	80 / 25 / 80	88.9	28	88.9	26	8.7	13	13	7	6.4	7	1	227.81
50397	80 / 32 / 80	88.9	35	88.9	26	9	13	13	7	6.4	7	1	227.81
50398	80 / 40 / 80	88.9	42	88.9	26	9.2	13	13	7	6.2	7	1	227.81
50399	80 / 50 / 80	88.9	54	88.9	26	9.3	13	13	7	5.8	7	1	227.81
50400	80 / 65 / 80	88.9	76.1	88.9	26	11.4	13	13	7	6.1	7	1	227.81
50401	100 / 20 / 100	108	22	108	31	10.3	15.5	15.5	8	8.2	8	1	297.90
50402	100 / 25 / 100	108	28	108	31	10.5	15.5	15.5	8	8.2	8	1	297.90
50403	100 / 32 / 100	108	35	108	31	10.8	15.5	15.5	8	8.2	8	1	297.90
50404	100 / 40 / 100	108	42	108	31	11	15.5	15.5	8	8	8	1	297.90
50405	100 / 50 / 100	108	54	108	31	11.3	15.5	15.5	8	7.8	8	1	297.90
50407	100 / 65 / 100	108	76.1	108	31	12.4	15.5	15.5	8	7.1	8	1	297.90
50408	100 / 80 / 100	108	88.9	108	31	13.5	15.5	15.5	8	7.5	8	1	297.90

Geberit Mapress Stainless Steel T-piece with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
50413	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2	1	14.71
50414	15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4	1	15.09
50415	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4	1	15.09
50416	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6	1	18.00
50417	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6	1	18.00
50418	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9	1	20.70
50419	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9	1	20.70
50420	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9	1	20.70
50421	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4	1	24.77
50422	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4	1	24.77
50424	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7	1	28.85
50425	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7	1	28.85
50427	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4	1	36.86
50428	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4	1	36.86
50429	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4	1	38.71
50437	65 / 20 / 65	76.1	3/4	76.1	23	7.9	11.5	11.5	6.2	6.4	6.2	1	198.98
50438	65 / 50 / 65	76.1	2	76.1	23	8.9	11.5	11.5	6.2	6.6	6.2	1	198.98
50440	80 / 20 / 80	88.9	3/4	88.9	26	8.8	13	13	7	7.3	7	1	213.57
50441	80 / 50 / 80	88.9	2	88.9	26	9.6	13	13	7	7.3	7	1	213.57
50443	100 / 20 / 100	108	3/4	108	31	10.5	15.5	15.5	8	9	8	1	272.18
50444	100 / 50 / 100	108	2	108	31	11.5	15.5	15.5	8	9.2	8	1	272.18

1.5.8 Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.	
50452	12	15	3/8	1.8	3.8	1	10.65	
50453	12 / 15	15	1/2	2.1	4.1	1	10.65	
50454	12 / 20	15	3/4	2.3	4.3	1	10.65	
50455	15	18	1/2	2.2	4.2	1	11.93	
50456	15 / 20	18	3/4	2.4	4.4	1	11.93	
50457	20 / 15	22	1/2	2.1	4.2	1	13.20	
50458	20	22	3/4	2.3	4.4	1	13.20	
50459	20 / 25	22	1	2.5	4.6	1	13.20	
50460	25 / 20	28	3/4	2.3	4.6	1	16.53	
50461	25	28	1	2.3	4.8	1	16.53	
50463	32 / 25	35	1	2.5	5.1	1	23.23	
50464	32	35	1 1/4	2.7	5.3	1	23.23	
50465	40 / 32	42	1 1/4	2.7	5.7	1	34.62	
50466	40	42	1 1/2	2.7	5.7	1	34.62	
50467	50 / 40	54	1 1/2	4.8	8.3	1	48.17	
50468	50	54	2	5.4	8.9	1	48.17	
50471	65	76.1	2 1/2	7	12.3	1	210.31	

Geberit Mapress Stainless Steel adaptor with male thread and plain end (FKM, blue)



Application purposes


- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
----------	--	--------------------------------	--	--	--	--	--	--

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12	15	1/2	5.7	25	5		9.36
31933	15	18	1/2	5.7	25	5		10.41
31936	20	22	3/4	5.9	25	5		11.45
31937	25	28	1	6.6	25	5		14.59
31938	32	35	1 1/4	8	6		1	20.86
31939	40	42	1 1/2	9.1	10		1	30.86
31940	50	54	2	10.2	5		1	41.72

Geberit Mapress Stainless Steel adaptor with female thread (FKM, blue)



Application purposes


- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
50484	12 / 15	15	1/2	3.7	0.4	1	10.65	
50485	12 / 20	15	3/4	3.8	0.3	1	10.65	
50486	15	18	1/2	3.7	0.4	1	11.93	
50487	15 / 20	18	3/4	3.8	0.3	1	11.93	
50488	20 / 15	22	1/2	3.6	0.2	1	13.20	
50489	20	22	3/4	3.9	0.3	1	13.20	
50490	20 / 25	22	1	4.2	0.4	1	13.20	
50491	25 / 15	28	1/2	3.8	0.2	1	16.53	
50492	25 / 20	28	3/4	3.9	0.3	1	16.53	
50493	25	28	1	4.4	0.4	1	16.53	
50494	32 / 25	35	1	4.5	0.2	1	23.23	
50495	32	35	1 1/4	4.9	0.4	1	23.23	
50496	32 / 40	35	1 1/2	4.9	0.4	1	23.23	
50497	40 / 32	42	1 1/4	5.1	0.2	1	34.62	
50498	40	42	1 1/2	5.3	0.4	1	34.62	
50499	50 / 40	54	1 1/2	7.1	2.2	1	48.17	
50500	50	54	2	6.2	0.4	1	48.17	

Geberit Mapress Stainless Steel adaptor with female thread and plain end (FKM, blue)**Application purposes**

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data


Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, \emptyset [mm]	Rp ["]	H [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
33846	20 / 15	22	1/2	4.5	5.8	5	1	13.26	
33848	25 / 15	28	1/2	5.3	6.6	5	1	17.28	
33850	32 / 15	35	1/2	5.6	6.9	5	1	22.90	
33852	40 / 15	42	1/2	6.1	7.4	5	1	29.34	
33854	50 / 15	54	1/2	6.6	7.9	5	1	34.96	
33860	65 / 15	76.1	1/2	9.1	10.4		1	122.16	
33862	80 / 15	88.9	1/2	10	11.3		1	173.59	
33864	100 / 15	108	1/2	12.1	13.4		1	209.34	

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long (FKM, blue)**Application purposes**

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, \emptyset [mm]	Rp ["]	H [cm]	L [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12	15	1/2	13.5	14.8	9	25	5		9.36
90933	15	18	1/2	13.5	14.8	9	12		1	10.41
90934	15	18	3/4	13.3	15.2	9			1	10.41
90935	20	22	1/2	13.9	14.8	8.9	12		1	11.45
90936	20	22	3/4	13.7	15.2	8.7	10		1	11.45

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (FKM, blue)**Application purposes**

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)							
Art. no.	DN	d, \emptyset [mm]	R ["]	H [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
50524	12 / 15	15	1/2	3.7	5.7	3.7	1	15.05	
50526	15	18	1/2	3.9	5.7	3.7	1	16.34	
50529	20	22	3/4	4.6	6	3.9	1	21.00	
50532	25	28	1	5.4	6.7	4.4	1	26.70	
50533	32	35	1 1/4	6.3	7.5	4.9	1	35.76	

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.	
50544	12 / 15	15	1/2	5.7	3.7	3.7	2.4	1	14.47	
50546	15	18	1/2	5.7	3.9	3.7	2.6	1	18.26	
50549	20	22	3/4	6	4.6	3.9	3.1	1	21.00	
50552	25	28	1	6.7	5.4	4.3	3.7	1	26.70	
50553	32	35	1 1/4	7.5	6.3	4.9	4.4	1	35.76	

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end (FKM, blue)



Application purposes


- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.	
33203	12 / 15	15	1/2	5.3	3.6	2.3	25	5	13.03	

1.5.9 Adaptors and connections, detachable

Geberit Mapress Stainless Steel union (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
50772	12	15	3/4	6.6	2.6	1	35.26	
50773	15	18	3/4	6.9	2.9	1	40.13	
50774	20	22	1	7.2	3	1	49.83	
50775	25	28	1 1/4	7.7	3.1	1	75.60	
50776	32	35	1 1/2	8.2	3	1	79.94	
50777	40	42	1 3/4	9.5	3.5	1	115.21	
50778	50	54	2 3/8	11.3	4.3	1	191.21	

Geberit Mapress Stainless Steel adaptor union with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)								
----------	--	--------------------------------	--	--	--	--	--	--	--	--

Adaptors and connections, detachable

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
50562	12 / 15	15	1/2	3/4	4.4	6.4	1	17.46
50563	12 / 20	15	3/4	3/4	4.6	6.6	1	18.34
50564	15	18	1/2	3/4	4.4	6.4	1	18.94
50565	15 / 20	18	3/4	3/4	4.6	6.6	1	19.91
50566	20 / 15	22	1/2	1	4.6	6.7	1	19.95
50567	20	22	3/4	1	4.7	6.8	1	19.95
50568	20 / 25	22	1	1	5.2	7.3	1	20.95
50570	25	28	1	1 1/4	5.5	7.8	1	32.84
50571	32	35	1 1/4	1 1/2	5.9	8.5	1	42.70
50572	40	42	1 1/2	1 3/4	6	9	1	51.72
50573	50	54	2	2 3/8	6.8	10.3	1	89.41

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	L [cm]	SU1 [pc.]	GBP/pc.
50581	12 / 15	15	1/2	3/4	4.4	6.4	1	23.82
50582	12 / 20	15	3/4	3/4	4.6	6.6	1	23.82
50583	15	18	1/2	3/4	4.4	6.4	1	27.30
50584	15 / 20	18	3/4	3/4	4.6	6.6	1	27.30
50585	20 / 15	22	1/2	1	4.6	6.7	1	28.68
50586	20	22	3/4	1	4.7	6.8	1	28.68
50587	20 / 25	22	1	1	5.2	7.3	1	28.68
50588	25	28	1	1 1/4	5.5	7.8	1	43.25
50589	32	35	1 1/4	1 1/2	5.9	8.5	1	57.72
50590	40	42	1 1/2	1 3/4	6	9	1	67.07
50591	50	54	2	2 3/8	6.8	10.3	1	115.34

Geberit Mapress Stainless Steel adaptor union with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50611	12 / 15	15	1/2	3/4	5.9	2.6	1	18.34
50612	12 / 20	15	3/4	3/4	6.1	2.6	1	16.81
50613	15	18	1/2	3/4	5.9	2.6	1	19.91
50614	15 / 20	18	3/4	3/4	6.1	2.6	1	19.91
50615	20	22	3/4	1	6.3	2.7	1	20.95
50616	20 / 25	22	1	1	6.6	2.8	1	20.95
50617	25	28	1	1 1/4	7.1	3.1	1	34.48
50618	32	35	1 1/4	1 1/2	7.7	3.2	1	44.83
50619	40	42	1 1/2	1 3/4	8.2	3.3	1	58.44
50620	50	54	2	2 3/8	9.5	3.7	1	97.28

Geberit Mappress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mappress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mappress Stainless Steel for gaseous media → p. 10

Characteristics



- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50631	12 / 15	15	1/2	3/4	5.9	2.6	1	23.82
50632	12 / 20	15	3/4	3/4	6.1	2.6	1	23.82
50633	15	18	1/2	3/4	5.9	2.6	1	27.30
50634	15 / 20	18	3/4	3/4	6.1	2.6	1	27.30
50635	20	22	3/4	1	6.3	2.7	1	28.68
50636	20 / 25	22	1	1	6.6	2.8	1	28.68
50637	25	28	1	1 1/4	7.1	3.1	1	43.25
50638	32	35	1 1/4	1 1/2	7.7	3.2	1	57.72
50639	40	42	1 1/2	1 3/4	8.2	3.3	1	67.07
50640	50	54	2	2 3/8	9.5	3.7	1	115.34

Geberit Mappress Stainless Steel adaptor with union nut (FKM, blue)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$
- For solar technology, industry and shipbuilding
- Application overview: Geberit Mappress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mappress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	di, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50652	12	15	1/2	10	5.1	2.5	1	16.35
50653	12	15	3/4	13	3.7	1.1	1	12.85
50656	15	18	3/4	13	3.7	1.1	1	13.60
50661	20	22	1	20	4	1.1	1	18.81
50662	20	22	1 1/4	26	4.3	1.3	1	18.81
50663	20	22	1 1/2	32	4.4	1.3	1	18.81
50664	25	28	1	20	4	1.3	1	24.50
50665	25	28	1 1/4	26	4.4	1.3	1	24.50
50666	25	28	1 1/2	32	4.8	1.3	1	24.50
50667	32	35	1 1/2	32	4.6	1.3	1	27.03
50668	40	42	1 3/4	39	5.2	1.3	1	36.17
50670	50	54	2 3/8	51	5.8	1.5	1	49.58

Geberit Mappress adaptor union with clamping ring for corrugated pipes, NPW, plain end




Application purposes

- For thermal media (solar)
- For mineral oils
- For fuels
- Only suitable for liquid media

Technical data

Material	DR brass CW602N
----------	-----------------

Art. no.	DN	DN	d, ø [mm]	L [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	10	2	12.18
22431	12	20	15	6.7	10	2	14.21
22422	15	16	18	6.4	10	2	13.20
22432	15	20	18	6.7	10	2	15.23
22423	20	16	22	6.8	10	2	14.21
22433	20	20	22	6.8	10	2	16.23
22444	25	25	28	6.8	10	2	22.32

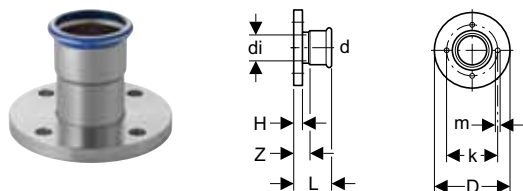Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (FKM, blue)**Application purposes**

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Type A (smooth sealing surface), EN 1092-1


Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	D [cm]	k [cm]	m [cm]	H [cm]	L [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
50683	15	18	16	9.5	6.5	1.4	1.1	5.7	3.7	4	10 / 16	1	42.05
50684	20	22	19.6	10.5	7.5	1.4	1.2	5.9	3.8	4	10 / 16	1	49.82
50685	25	28	25.6	11.5	8.5	1.4	1.4	6.5	4.2	4	10 / 16	1	60.84
50686	32	35	32	14	10	1.8	1.5	6.9	4.3	4	10 / 16	1	85.67
50687	40	42	39	15	11	1.8	1.6	7.7	4.7	4	10 / 16	1	101.03
50688	50	54	51	16.5	12.5	1.8	1.8	8.7	5.2	4	10 / 16	1	125.62
50691	65	76.1	72.1	18.5	14.5	1.8	1.8	12.6	7.3	4	10 / 16	1	202.71
50692	80	88.9	84.9	20	16	1.8	2	14.3	8.3	8	10 / 16	1	240.99
50693	100	108	104	22	18	1.8	2	16.8	9.3	8	10 / 16	1	296.40

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

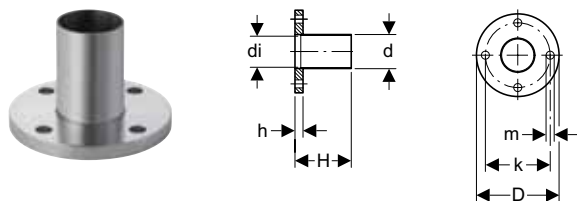Geberit Mapress Stainless Steel flange PN 10/16, with plain end (FKM, blue)**Application purposes**

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Type A (smooth sealing surface), EN 1092-1

Technical data


Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	D [cm]	k [cm]	m [cm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
33728	50	54	54.5	16.5	12.5	1.8	8.7	1.8	4	10 / 16	1	157.35
33729	65	76.1	72.1	18.5	14.5	1.8	12.6	1.8	4	10 / 16	1	180.13
33730	80	88.9	84.9	20	16	1.8	14.3	2	8	10 / 16	1	210.87
33731	100	108	104	22	18	1.8	16.8	2	8	10 / 16	1	252.63

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6 (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	da [mm]	di, Ø [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	6	1	57.24
36151	32	35	40	32	7	13.5	0.6	6	1	82.41
36152	40	42	47	39	8	13.5	0.6	6	1	96.16
36153	50	54	59	51	9	13.5	0.8	6	1	119.05
36154	65	76.1	78	73.1	11	13.5	0.8	6	1	187.72
36155	80	88.9	91	84.9	12.8	13.5	1	6	1	219.78
36156	100	108	110	104	14.8	13.5	1	6	1	263.29


To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16 (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Material	CrNiMo steel 1.4401 (EN 10088)
----------	--------------------------------

Art. no.	DN	d, Ø [mm]	da [mm]	di, Ø [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	10 / 16	1	53.23
36142	25	28	32	25.6	6.8	13.5	0.6	10 / 16	1	64.92
36143	32	35	40	32	7.8	13.5	0.6	10 / 16	1	93.78
36144	40	42	47	39	8.8	13.5	0.6	10 / 16	1	109.07
36145	50	54	59	51	10.2	13.5	0.8	10 / 16	1	135.04
36146	65	76.1	78	72.1	12.2	13.5	0.8	10 / 16	1	212.96
36147	80	88.9	91	84.9	13.8	13.5	1	10 / 16	1	249.31
36148	100	108	110	104	15.8	13.5	1	10 / 16	1	298.64

To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 90
- Geberit bolt set for flange connection, made of CrNi steel → p. 91

1.5.10 Sealings

Geberit Mapress Stainless Steel cap (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)				
Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
50752	12	15	2.3	0.3	1	9.57
50753	15	18	2.3	0.3	1	11.52
50754	20	22	2.4	0.3	1	12.66
50755	25	28	2.6	0.3	1	15.28
50756	32	35	2.9	0.3	1	21.05
50757	40	42	3.3	0.3	1	44.30
50758	50	54	3.8	0.3	1	50.43
50761	65	76.1	6	0.7	1	71.87
50762	80	88.9	6.7	0.7	1	88.67
50763	100	108	8.2	0.7	1	143.39

1.5.11 Connections

Geberit Mapress Stainless Steel elbow tap connector 90°, offset (FKM, blue)

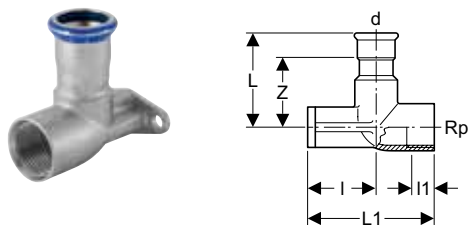

Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Two fastening points
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Material		CrNiMo steel 1.4401 (EN 10088)									
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	I [cm]	I1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.	
50792	12 / 15	15	1/2	5	6.5	3.5	1.5	3	1	17.53	
50793	15	18	1/2	5	6.5	3.5	1.5	3	1	19.06	
50794	20	22	3/4	5.4	6.5	3.1	1.6	3.3	1	27.31	

1.5.12 Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated


Technical data

Material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	D [cm]	L [cm]	I [cm]	SU1 [pc.]	GBP/pc.	
90980	12	15	2.5	45	16.5	1	43.82	
90981	15	18	3	45	16.5	1	44.90	
90982	20	22	3.4	45	16.5	1	47.09	
90983	25	28	3.8	45	16.5	1	51.48	
90984	32	35	4.5	45	16.5	1	62.42	
90985	40	42	5.4	45	16.5	1	74.48	
90986	50	54	7	45	16.5	1	82.15	
90987	65	76.1	8.9	45	16.5	1	186.18	
90988	80	88.9	10.8	45	16.5	1	208.10	
90989	100	108	13.3	45	16.5	1	230.00	

1.6 Geberit Mapress Stainless Steel, accessories

1.6.1 Insulations for connectors

Geberit sound insulation set for single elbow tap connector 90°

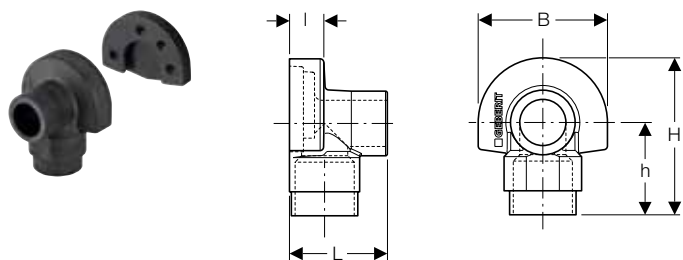

Application purposes

- For Geberit elbow tap connector with female thread Rp 1/2

Characteristics

- Black

Technical data

Noise reduction at 3 bar flow pressure	12 dB(A)
Material	EPDM


Scope of delivery

- Sound insulation cap
- Sound insulation base

Art. no.	B [cm]	H [cm]	h [cm]	L [cm]	I [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.801.00.1	7	8.5	5	5.3	1.9	50	10	1	2.66

1.6.2 Caulks for pipes and fittings

Geberit sealing tape



Application purposes

- For protecting Geberit Mapress system pipes and fittings against external corrosion factors
- For protecting Geberit PushFit fittings against external corrosion factors

Characteristics

- Black

Technical data


Installation temperature	-10 - +50 °C
Temperature resistance	-60 - +100 °C
Material	IIR

Art. no.	s [mm]	B [cm]	L [m]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
601.813.00.1	1	3	12.5	6	1	28.00
601.815.00.1	1	5	12.5	5	1	46.62

1.6.3 Pipe fastenings

New

Geberit pipe bracket, insulated, with threaded socket M8 / M10

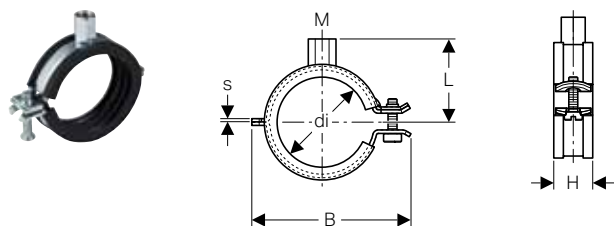

Application purposes

- For fastening Geberit Mapress system pipes
- For fastening Geberit PushFit system pipes, ML
- For fastening Geberit Mepla system pipes, ML

Characteristics

- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded
- Sound insulation in accordance with DIN 4109
- Zinc-plated


Technical data

Material	Steel
----------	-------

Art. no.	Colour / Surface	M [mm]	di, ø [mm]	s [mm]	B [cm]	H [cm]	L [cm]	SU2 [pc.]	GBP/pc.
601.850.26.1	galvanized	8 / 10	12-14	1.5	4.7	2.3	2.9	50	1.29
601.851.26.1	galvanized	8 / 10	15-19	1.5	5.2	2.3	3.1	50	1.29
601.852.26.1	galvanized	8 / 10	20-24	1.5	5.6	2.3	3.4	50	1.29
601.853.26.1	galvanized	8 / 10	25-30	1.5	6.3	2.3	3.6	50	1.40
601.854.26.1	galvanized	8 / 10	32-37	1.5	6.8	2.3	3.9	50	1.50
601.855.26.1	galvanized	8 / 10	40-46	2	7.6	2.3	4.3	50	1.61
601.857.26.1	galvanized	8 / 10	54-58	2	8.9	2.3	4.8	50	1.94
601.859.26.1	galvanized	8 / 10	74-80	2	11.9	2.3	6.4	50	2.68
601.860.26.1	galvanized	8 / 10	83-91	2	13	2.3	6.8	50	2.79
601.861.26.1	galvanized	8 / 10	108-114	2.5	15.3	2.8	8.1	25	3.22

Available as of April 2016

Geberit double nipple



Application purposes

- For building drainage

Characteristics


- Reduced
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	Colour / Surface	G ["]	M [mm]	H [cm]	SW [mm]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	1	1.65

Geberit threaded pipe



Application purposes

- For fastening Geberit pipe brackets to base plates
- For building drainage
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	G ["]	D [cm]	L [m]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	1	2	1	21.24

Geberit base plate, square, two-hole, with threaded socket M8 / M10

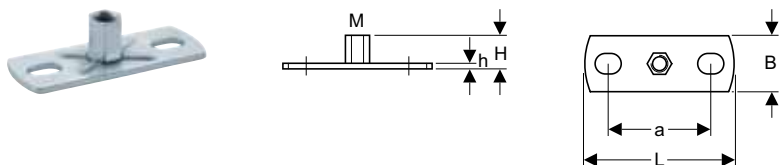

Application purposes

- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes


Characteristics

- Female thread
- Zinc-plated
- Two fastening points

Technical data

Material							Steel			
Art. no.	M	a	B	H	h	L	SU3	SU1	GBP/pc.	
	[mm]	[cm]	[cm]	[cm]	[cm]	[cm]	[pc.]	[pc.]		
362.848.26.1	8 / 10	5.4	3	1.9	0.3	8	50	1	2.64	

Geberit base plate, square, two-hole, with threaded socket M10 / G 1/2

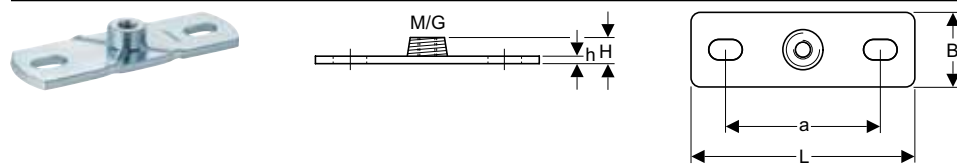

Application purposes

- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points

Technical data


Material							Steel			
Art. no.	G	M	a	B	H	h	L	SU3	SU1	GBP/pc.
	["]	[mm]	[cm]	[cm]	[cm]	[cm]	[cm]	[pc.]	[pc.]	
362.851.26.1	1/2	10	8.5	4	1.5	0.5	12	50	1	2.37



- Fastening material not included in the scope of delivery

1.6.4 Connector fastenings

Fastening for Geberit Mapress elbow adaptor 90°

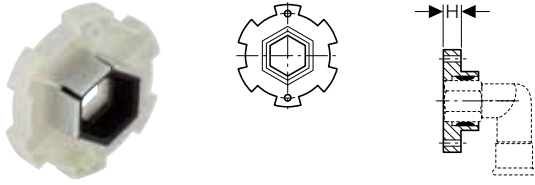

Application purposes


- For double panelling in drywall construction
- For fastening Geberit Mapress Carbon Steel elbow adaptor with female thread G 1/2
- For fastening Geberit Mapress Stainless Steel elbow adaptors with female thread G 1/2

Characteristics

- Sound-absorbing

Art. no.	H [cm]	SU2 [pc.]	GBP/pc.
90282	1.3	10	5.45

Geberit mounting plate, offset, single

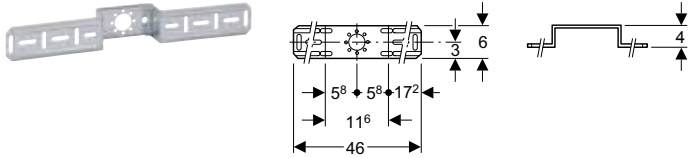

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mapress connections
- For fastening Geberit PushFit connections

Characteristics

- Zinc-plated

Technical data


Material	Steel
----------	-------

Scope of delivery

- Fastening material

Art. no.	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.733.00.1	400	25	5	4.03

Geberit mounting plate, offset, double, connecting distance 10 cm or 12 cm

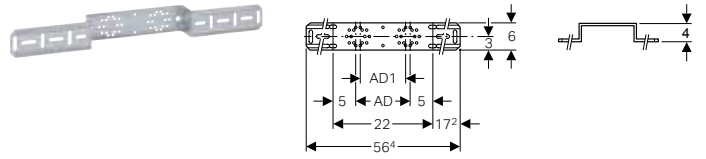

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mapress connections
- For fastening Geberit PushFit connections

Characteristics

- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.731.00.1	12	10	420	5	4.74

Accessories

- Drain pipe bracket for Geberit mounting plates → p. 88

Geberit mounting plate, offset, double, connecting distance 7.3 cm or 15.3 cm

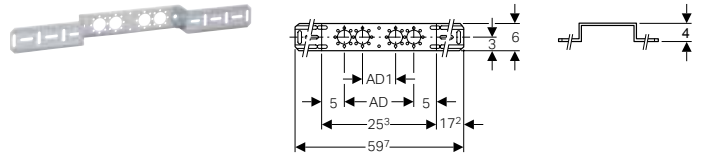

Application purposes

- For fastening Geberit Mepla connections
- For fastening Geberit Mapress connections
- For fastening Geberit PushFit connections

Characteristics

- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.732.00.1	15.3	7.3	420	5	4.20

Accessories

- Drain pipe bracket for Geberit mounting plates → p. 88

Drain pipe bracket for Geberit mounting plates

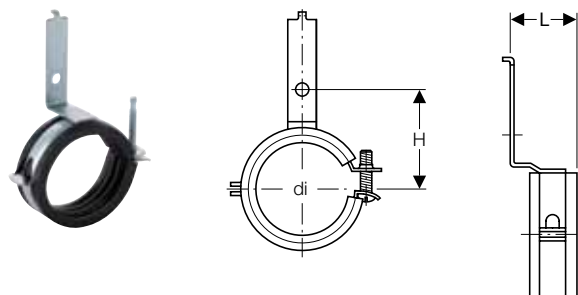

Characteristics

- Sound-absorbing
- Zinc-plated

Technical data

Material	Steel
----------	-------

Scope of delivery

- Fastening material

Art. no.	di, \varnothing [mm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.741.00.1	50-56	5.2-5.5	3.5	25	5	1	2.72

1.6.5 System seals

Geberit Mapress seal ring, CIIR, black



Application purposes

- For technical building systems, industry and shipbuilding
- Dimensions \varnothing 76.1–108 mm exclusively for Geberit Mapress Carbon Steel, Geberit Mapress Stainless Steel and Geberit MapressCuNiFe
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 - +120 °C
Material	CIIR

Art. no.	DN	d, \varnothing [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90401	10	12	20		0.27
90402	12	15	20		0.27
90403	15	18	20		0.36
90404	20	22	20		0.36
90405	25	28	20		0.40
90406	32	35	20		0.40
90407	40	42	20		0.58
90408	50	54	20		0.58
90409	65	76.1		1	1.59
90410	80	88.9		1	2.16
90411	100	108		1	4.19

Geberit Mapress seal ring, FKM, blue



Application purposes

- For solar technology, industry and shipbuilding
- Dimensions \varnothing 76.1–108 mm exclusively for Geberit Mapress Carbon Steel, Geberit Mapress Stainless Steel and Geberit MapressCuNiFe
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-25 - +180 °C
Material	FKM

Art. no.	DN	d, \varnothing [mm]	SU2 [pc.]	GBP/pc.
90881	10	12	10	1.65
90882	12	15	10	0.71
90883	15	18	10	0.86
90884	20	22	10	1.02
90885	25	28	10	1.19
90886	32	35	10	1.39
90887	40	42	10	2.57
90888	50	54	10	3.58
90891	65	76.1	5	10.56
90892	80	88.9	5	13.12
90893	100	108	5	29.26

Geberit Mapress seal ring FKM, white



Application purposes

- For saturated steam
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	5-155 °C
Material	FKM

Art. no.	DN	d, \varnothing [mm]	SU2 [pc.]	GBP/pc.
91152	12	15	10	0.93
91153	15	18	10	1.12
91154	20	22	10	1.33
91155	25	28	10	1.55
91156	32	35	10	1.81
91157	40	42	10	3.35
91158	50	54	10	4.65


Geberit Mapress seal ring, HNBR, yellow**Application purposes**

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	-20 - +70 °C
Material	HNBR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
90452	12	15	20	1	0.75
90453	15	18	20	1	0.85
90454	20	22	20	1	0.94
90455	25	28	20	1	1.08
90456	32	35	20	1	1.17
90457	40	42	10	1	1.41
90458	50	54	10	1	1.62
90471	65	76.1	10	1	8.12
90472	80	88.9	10	1	12.07
90473	100	108	10	1	15.09


Geberit Mapress flat gasket, FPM, green**Application purposes**

- For flat sealing Geberit Mapress screw connections
- For solar technology, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	-30 - +180 °C
Material	FPM

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
90092	3/4	13	2.4	0.2	10	1.15
90094	1	19.6	3	0.2	10	2.02
90095	1 1/4	25.6	3.9	0.2	10	0.88
90096	1 1/2	32	4.45	0.2	10	1.08
90097	1 3/4	39	5.05	0.2	10	1.52
90098	2 3/8	51	6.6	0.3	10	2.78


Geberit Mapress flat gasket, EPDM, black**Application purposes**

- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	0-100 °C
Material	EPDM

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	10	1.85	0.2		10	0.21
90081	3/4	13	2.4	0.2	50	10	0.21
90082	1	19.6	3	0.2		10	0.21
90083	1 1/4	25.6	3.9	0.2		10	0.32
90084	1 1/2	32	4.45	0.2		10	0.43
90085	1 3/4	39	5.05	0.2		10	0.53
90086	2 3/8	51	6.6	0.3		10	1.08

Geberit Mapress flat gasket Centellen® R 3825**Application purposes**


- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	-30 - +150 °C
Material	Centellen® R 3825

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
600.021.00.1	1/2	10	1.8	0.2		1	0.86
600.022.00.1	3/4	13	2.4	0.2	5		0.88
600.023.00.1	1	20	3	0.2	5		0.90
600.024.00.1	1 1/8	21	3.5	0.2		1	1.06
600.025.00.1	1 1/4	26	3.9	0.2	5		1.11
600.026.00.1	1 1/2	32	4.5	0.2	5		1.15
600.027.00.1	1 3/4	39	5.1	0.2		1	1.21
600.028.00.1	2	42	5.6	0.2		1	1.28
600.029.00.1	2 1/4	42	6.3	0.2		1	1.33
600.030.00.1	2 3/8	51	6.6	0.2		1	1.43
600.031.00.1	2 1/2	54	7.2	0.2		1	1.62
600.032.00.1	2 3/4	57	7.8	0.2		1	1.96
600.033.00.1	3	72	8.5	0.2		1	2.13
600.034.00.1	3 1/2	85	9.7	0.2		1	2.41

Geberit Mapress flat gasket Centellen® HD 3822

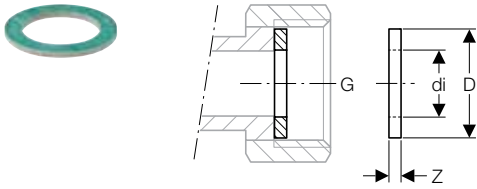

Application purposes


- For technical building systems, industry and shipbuilding
- For flat sealing Geberit Mapress screw connections
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	-20 - +70 °C
Material	Centellen® HD 3822

Art. no.	G ["]	di, ø [mm]	D [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
90072	3/4	13	2.4	0.2	1	1.44
90074	1	19.6	3	0.2	1	1.44
90075	1 1/4	25.6	3.9	0.2	1	2.16
90076	1 1/2	32	4.45	0.2	1	2.16
90077	1 3/4	39	5.05	0.2	1	2.89
90078	2 3/8	51	6.6	0.3	1	3.61

Geberit flange gasket PN 6



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Technical data

Operating temperature	-30 - +180 °C
Material	Centellen® HD 3822

Art. no.	DN	di, ø [mm]	D [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
91041	15	20	4.4	0.2	6	1	1.41
91042	20	25	5.4	0.2	6	1	1.73
91043	25	30	6.4	0.2	6	1	2.04
91044	32	38	7.6	0.2	6	1	2.51
91045	40	45	8.6	0.2	6	1	3.15
91046	50	57	9.6	0.2	6	1	3.63
91047	65	76	11.6	0.2	6	1	4.09
91048	80	89	13.2	0.2	6	1	5.51
91049	100	108	15.2	0.2	6	1	6.29

O-ring set for Geberit Mepla screw unions, conical sealing



Application purposes

- For natural and liquefied gases
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10

Characteristics

- Yellow

Technical data


Operating temperature	-20 - +70 °C
Material	HNBR

Scope of delivery

- Set of 2 pieces

Art. no.	G ["]	di, ø [mm]	s [mm]	SU1 [pc.]	GBP/pc.
242.520.00.1	7/8	20.35	1.78	1	3.20
242.521.00.1	1 1/8	25.07	2.62	1	4.25
242.522.00.1	1 3/8	31.42	2.62	1	5.33

Geberit flange gasket PN 10/16

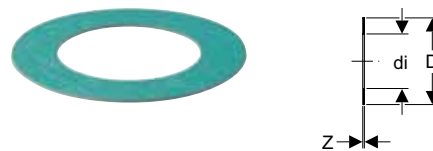

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview: Geberit Mapress Stainless Steel for liquid media → p. 10
- Application overview: Geberit Mapress Stainless Steel for gaseous media → p. 10


Technical data

Operating temperature	-30 - +180 °C
Material	Centellen® HD 3822

Art. no.	DN	di, ø [mm]	D [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
91031	15	20	5	0.2	10 / 16	1	1.11
91032	20	25	6	0.2	10 / 16	1	1.35
91033	25	30	7	0.2	10 / 16	1	1.61
91034	32	38	8.2	0.2	10 / 16	1	1.98
91035	40	45	9.2	0.2	10 / 16	1	2.47
91036	50	57	10.7	0.2	10 / 16	1	2.83
91037	65	76	12.7	0.2	10 / 16	1	3.22
91038	80	89	14.2	0.2	10 / 16	1	3.96
91039	100	108	16.2	0.2	10 / 16	1	4.95

1.6.6 Sets of bolts for flange connections

Geberit bolt set for flange connection, made of CrNi steel



Application purposes

- For flanges made of stainless steel, gunmetal and brass

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Technical data

Material	CrNi steel 1.4301 (EN 10088)
----------	------------------------------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [cm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	1.1	4.5	3.1	4	1.55
91165	10	1.1	5	3.6	4	1.55
91166	12	1.4	5	3	4	1.94
91167	12	1.4	5.5	3.5	4	1.94
91168	12	1.4	6	4	4	1.48
91169	16	1.8	5.5	3.3	4	1.76
91170	16	1.8	6	3.8	4	1.76
91171	16	1.8	6.5	4.3	4	1.76
91172	16	1.8	7	4.8	4	1.76
91173	16	1.8	8	5.8	4	1.76