

## LIGHTING DATA

Lamp Lumens (per metre)	540Lm <sup>m</sup>
Lumens / Watt / Metre	54Lm/W/m
Colour Temperature	2700K
CRI	>90
Beam Width	110°
Binning System	3 SDCM
Lifetime	TBC
LOR	TBC

## ELECTRICAL INFORMATION



	MIN	NORMAL	MAX
Voltage	-	24V DC	-
Wattage (per metre)	-	10W/m	-
Product Class		III (SELV)	

## CONNECTIONS AND MECHANICAL

Maximum Length	5000mm
Cut Points	50mm
Mounting	Adhesive tape
Minimum Bend Radius	35mm
Connection Type	Solder
IP Rating	IP20
Max Ambient °C	TBC
Max Casing °C	TBC
Max Junction Temperature °C (@ 35°C)	TBC



27/03/15

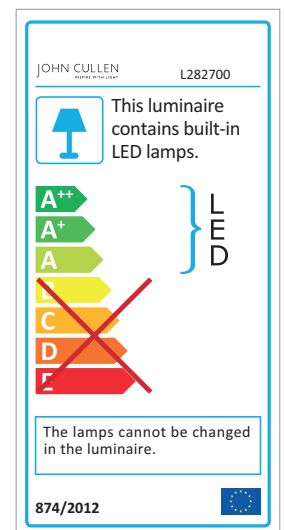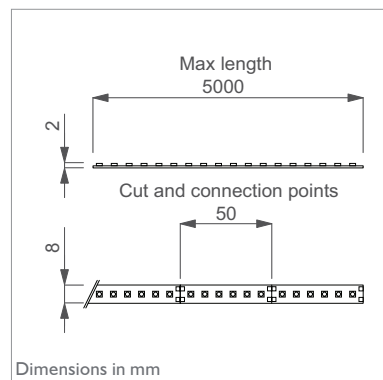

## PRODUCT CODES

1 Metre (available in 250mm order lengths)	L282700
--	---------

## PRODUCT ACCESSORIES

6mm Trimless Aluminium Extrusion (2 metre)	Y424010
6mm Trim Aluminium Extrusion (2 metre)	Y424110
12mm Trimless Aluminium Extrusion (2 metre)	Y424210
12mm Trim Aluminium Extrusion (2 metre)	Y424310
45° Aluminium Extrusion (2 metre)	Y424510

## LED DRIVERS

CODE	DIMMING TYPE	DIMENSIONS	VOLTAGE	EFFICIENCY	IP RATING	WATTAGE	METRES PER DRIVER	NOTES
DR20	Switching*	50x35x109	24V DC	83%	IP20	20W	2	
DR60	Switching*	44x40x198	24V DC	87%	IP67	60W	6	
DR75	Switching*	44x47x220	24V DC	90%	IP20	75W	7.5	
DRI00	Switching*	42x65x210	24V DC	83%	IP67	100W	10	
DRINT	0-10V Dim interface	42x20x172		96%	IP20	120W	12	24V DC input converts switching driver to 0-10V dimming



Designed in-house in the UK supporting British manufacturing

## SHOWROOM AND DESIGN STUDIO

561-563 Kings Road,  
London, SW6 2EB, UK  
E: design@johncullenlighting.co.uk

## CUSTOMER SERVICE AND DISTRIBUTION

Unit 24, Talina Centre, Bagley's Lane,  
London, SW6 2BW, UK  
E: sales@johncullenlighting.co.uk

www.johncullenlighting.co.uk

T: +44 (0) 20 7371 9000