

Ecophon Solo™ Circle

Ecophon Solo Circle is an acoustic solution, primarily when it is not possible to install a wall-to-wall ceiling. Solo Circle is suitable in buildings where the room volume could be maintained or as an option when TABS (Thermally Activated Building System) is selected as cooling system.

Solo Circle is an unframed free hanging unit offering a high degree of design possibilities both regarding colours and suspension systems. The three different suspension systems using Adjustable wire hangers, One-point fixing or Adjust brackets in combination with the engineered Connect Absorber anchor (patent) give opportunities to create several layers and angles.

The Ecophon Solo Circle tile is available in size Ø1200x40 mm with a weight of 4,5 kg or Ø800x40 mm with a weight of 2kg. The panel is manufactured from high density, 3rd generation glass wool, with Akutex™ FT surface on both sides. The edges are straight cut and painted.



Bosch, Warsaw, Poland


SYSTEM RANGE



Size, mm	800x800	1200x1200
Special Fixing	•	•
Thickness (THK)	40	40
Inst. Diag.	M370	M364




Solo panel



Suspension with Connect Adjustable wire hanger and Connect Absorber



Suspension with One-point fixing



Suspension with Connect Adjust bracket




Acoustic

The values in the diagram refer to a single unit. If the units are arranged in a cluster with distances between units less than 0,5 meters, the Aeq per unit will be slightly reduced.

Sound Absorption:


Test results according to EN ISO 354.

A_{eq}, Equivalent absorption area per unit (m² sabin)

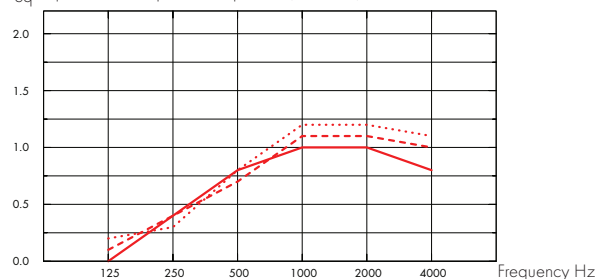

- Solo Circle Ø800, 200 mm o.d.s.
 - - - Solo Circle Ø800, 400 mm o.d.s.
 - . . . Solo Circle Ø800, 1000 mm o.d.s.
- o.d.s = overall depth of system

A_{eq}, Equivalent absorption area per unit (m² sabin)

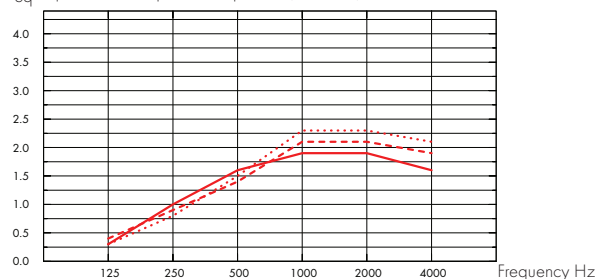

- Solo Circle Ø1200, 200 mm o.d.s.
 - - - Solo Circle Ø1200, 400 mm o.d.s.
 - . . . Solo Circle Ø1200, 1000 mm o.d.s.
- o.d.s = overall depth of system

	THK mm	o.d.s. mm	A _{eq} , Equivalent absorption area per unit (m ² sabin)					
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Ø800	40	200	0.00	0.40	0.80	1.00	1.00	0.80
Ø800	40	400	0.10	0.40	0.70	1.10	1.10	1.00
Ø800	40	1000	0.20	0.30	0.80	1.20	1.20	1.10
Ø1200	40	200	0.30	1.00	1.60	1.90	1.90	1.60
Ø1200	40	400	0.40	0.90	1.40	2.10	2.10	1.90
Ø1200	40	1000	0.30	0.80	1.50	2.30	2.30	2.10



Accessibility

The tiles are demountable.



Cleanability

Daily dusting and vacuum cleaning. Weekly wet wiping.



Visual appearance

White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance (of which more than 99% is diffuse reflection). Retro reflection coefficient 63 mcd/(m²lx). Gloss < 1.



Influence of climate

The units should be installed in areas/premises where the ambient relative humidity (RH) and the temperature does not exceed 70% and 30°C respectively.



Indoor Climate

Certificate / Label	
Finish M1	•
French VOC, A+	•
Swedish Asthma and Allergy Association	•
Danish Indoor Climate Label	•
California Emission Regulation, CDPH	•



Environmental influence

Certificate / Label	
The Nordic Ecolabel	•

Fully recyclable.



Fire safety

Country	Standard	Class
Europe	EN 13501-1	A2-s1,d0

The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182.



Mechanical properties

The tile can take both point loads and distributed loads. See Functional demands, Mechanical properties at www.ecophon.com.



Installation


Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification.



CE

The CE marking confirms important product performance such as sound absorption, emissions, fire safety and load bearing capacity. All Ecophon ceiling products are CE marked according to European standard EN13964, and individual product performance is declared in Declaration of Performance (DoP) documents.


INSTALLATION DIAGRAM (M364) FOR ECOPHON SOLO CIRCLE

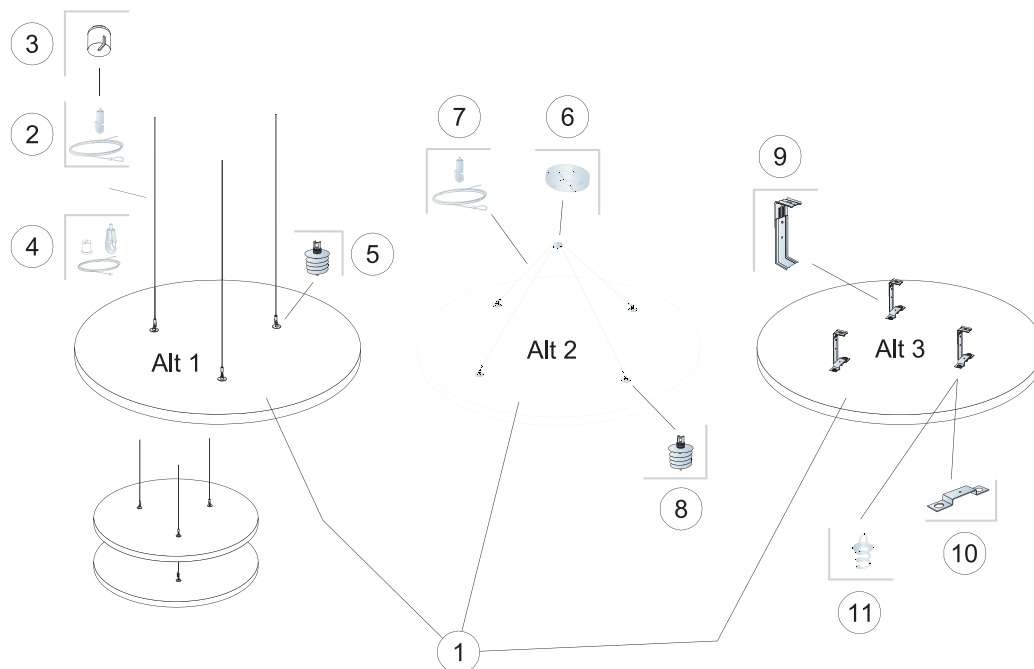


QUANTITY SPECIFICATION (EXCL. WASTAGE)

		Size, mm
		1200x1200
1	Solo Circle	1,13m ² /panel
2	Connect Adjustable wire hanger (Alt 1)	3/panel
3	Connect Covering cup (Alt 1, Optional)	3/panel
4	Connect Adjustable wire Kit (Alt 1, Optional)	3/panel
5	Connect Absorber anchor (Alt 1)	3/panel
6	Connect One-point fixing (Alt 2)	1/panel
7	Connect Adjustable wire hanger (Alt 2)	2/panel
8	Connect Absorber anchor (Alt 2)	4/panel
9	Connect Adjust bracket (Alt 3)	3/panel
10	Connect Fixing plate (Alt 3)	3/panel
11	Connect Spiral anchor (Alt 3)	6pcs/panel


Δ Min. overall depth of system: Δ1 140 mm / Δ2 500 mm / Δ3 121 mm




See Quantity specification




Panels can be suspended underneath each other



Panels can be installed in angles up to 60°




Detail of One-point fixing

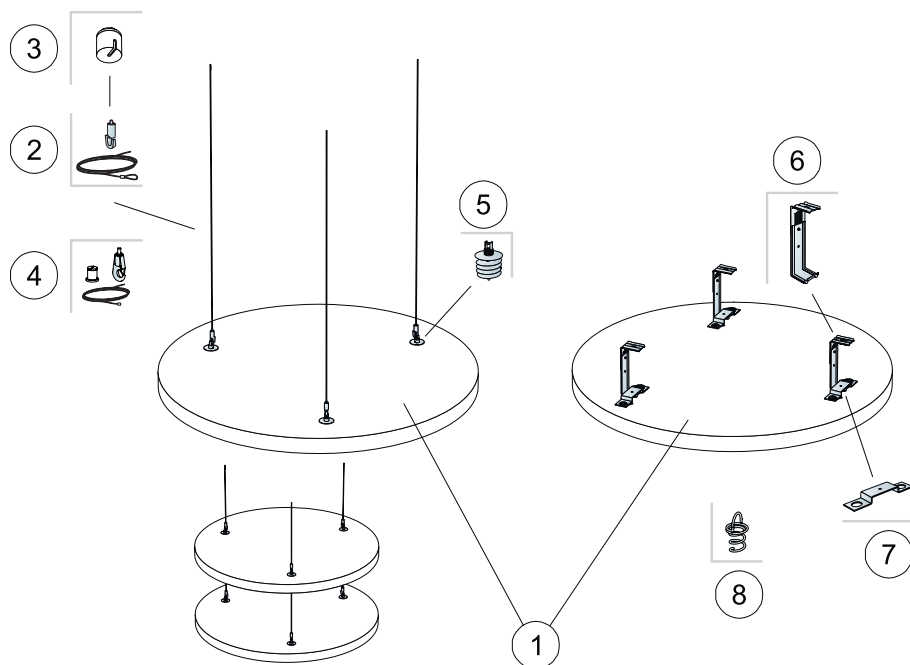


QUANTITY SPECIFICATION (EXCL. WASTAGE)

		Size, mm
		800x800
1	Solo Circle	0,5m ² /panel
2	Connect Adjustable wire hanger (Alt 1)	3/panel
3	Connect Covering cup (Alt 1, Optional)	3/panel
4	Connect Adjustable wire kit (Alt 1, Optional)	3/panel
5	Connect Absorber anchor (Alt 1)	3/panel
6	Connect Adjust bracket (Alt 2)	3/panel
7	Connect Panel fixing plate (Alt 2)	3/panel
8	Connect Spiral anchor (Alt 2)	6pcs/panel


Δ Min. overall depth of system: Δ1 140 mm / Δ2 121 mm




See Quantity specification



Panels can be suspended underneath each other



Panels can be installed in angles up to 60°



Installation of Connect Covering cup