



# 6200

**electrically operated**

for light, medium- and heavy-weight curtains



**Luxurious and  
sturdy track**





# 6200

## electrically operated luxurious & sturdy

The Goelst 6200 electrically operated system is ultra-quiet and can be used for comfort or as an aid in care homes and institutions. It can be integrated in most home automation systems, where it helps e.g. the presence simulation. A popular track that can be used in a wide variety of situations, such as private homes, but also in office buildings and in the care sector.

- The ideal track for light, medium-heavy or heavy curtains.
- Easy to bend and exceptional quality.
- Fitted with a 1.0 Nm motor which is suspended under the last runner at the end of the track; suitable for curtain lengths up to 10 metres and weights up to 40 kg.
- The curtains in the system can be single-sliding or middle-closing.
- The motor is concealed from view by the curtain.



- Can be forward or reverse bent in different radii.
- Compatible with the Goelst Flow System for regularly pleated curtains.
- Silent and smooth running, also round bends.

## Standard colours




High quality, wear-resistant coating, highly colourfast, UV-resistant.  
Other RAL colours & special coatings on request.

## Features

<b>Material:</b>	aluminium
<b>Colour:</b>	white, natural metallic, black
<b>Dimensions:</b>	22 x 31 mm
<b>Weight profile:</b>	567 gr/m <sup>1</sup>
<b>Mounting:</b>	wall or ceiling

## Profile specifications

### Aluminium profile:



### Colours with RAL code and lengths (m):

	RAL	4	5	6	7
white	9010	•		•	•
natural metallic	9006	•		•	•
black				•	

### Mounting surface:

- wood
- masonry/concrete

### Bracket type:

- ceiling bracket
- wall bracket
- spacer bracket

### Bending:

bending radius	bending tool
R 20 cm	1015
R 30 cm	1015
R 40 cm	1015
R 50 cm	1015
R > 100 cm	1018

R 20 cm

R > 100 cm


## Flow

The Goelst Flow System keeps pleats in curtains consistent. It can be used with small and wide channel tracks and, because of the broad assortment of components, it can be integrated in hand-drawn, cord-pulled and electrically operated systems.


The Flow System can also be used with curved curtain tracks. For further information, see the Flow product data sheet.




## Mounting

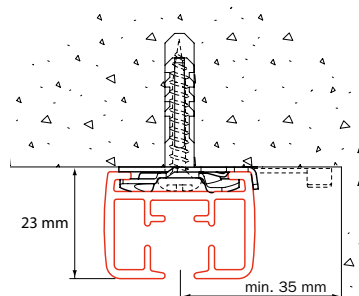


Ceiling mounting with fixing clamp 6050:  
allow room for tightening the clamp

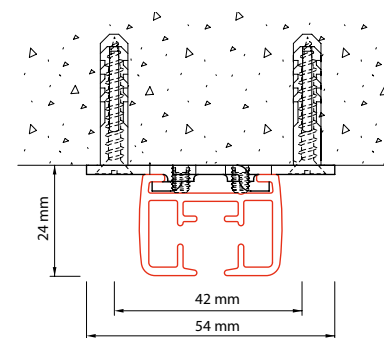

Ceiling mounting with bracket 6055-1000

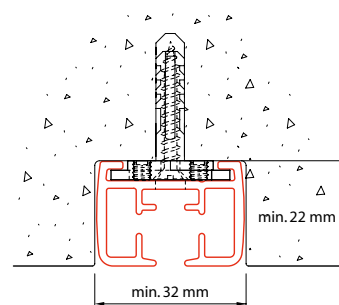


Concealed mounting on or in a ceiling with  
bracket 6055-2000

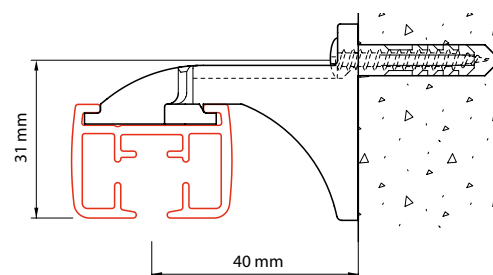


Wall mounting with bracket 6051


### Mounting guideline




The distance between the brackets can vary depending on the following factors: the mounting surface (wood, concrete or plaster), the weight of the curtains and the curtain fabric production method, the specific application and the system usage intensity. General advice: with the curtains open, place additional brackets where the pleats bunch together. Also place additional brackets before and after bends.

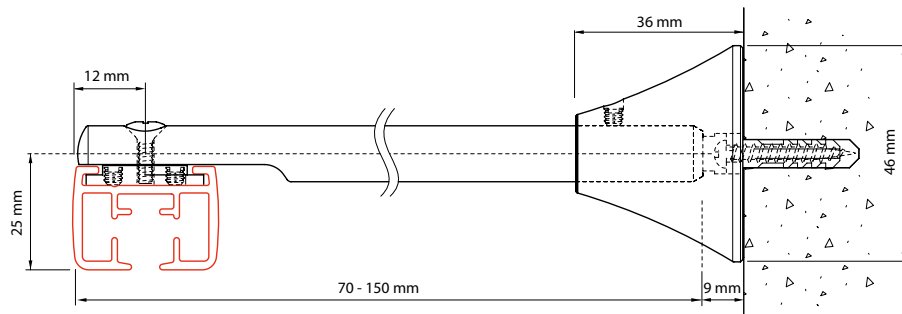


Wall mounting with adjustable extension bracket  
6017, can be shortened from 15 to 7 cm.

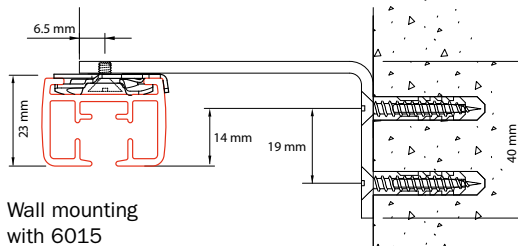



Wall mounting  
with 6015

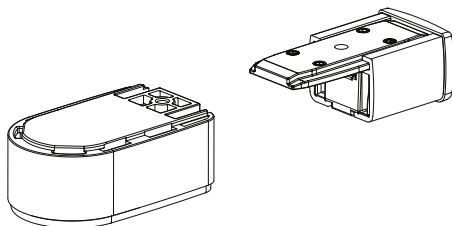

Compact pulley in pulley set 6272-1000

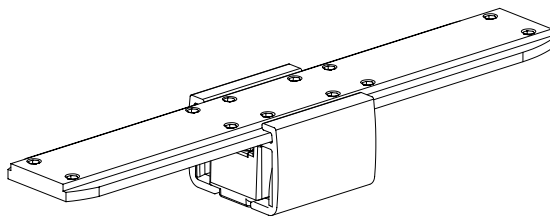

Compact intermediate pulley 6272-2000

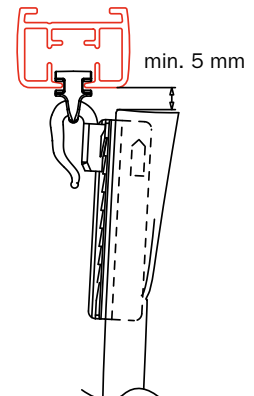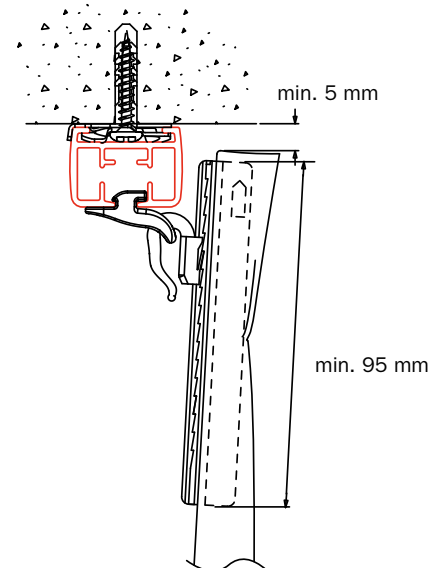


## Specification guide

### Material


- Aluminium EN AW-6060-T66.
- Anodised in accordance with the Qualanod standard.
- Powder coated in accordance with the Qualicoat standard.

## Standard parts

### System




**6060-1.0**  
motor-unit 6200/  
6500 1.0 Nm  
white




**6330-1000-EU**  
power supply Euro  
AC Plug / 24V 1,0A  
4m DC



**6220**  
drive belt 10mm  
on reel 50 m /  
300 m / 600 m




**6271-1000**  
pulley set 6000  
serie white / grey  
/ black



**6274-3000**  
carrier with  
overlap white /  
natural metallic /  
black

### Curtain transport




**4010**  
glider  
white / grey /  
black

### Mounting



**6050**  
ceiling fixing  
clamp natural  
incl. washer

### Accessories



**6052**  
connecting bridge  
natural




**6002**  
channel stop

## Optional parts


### System




**6271-10UP**  
pulley set motor-  
up left / right /  
motor-up white



**6272-1000**  
pulley set 6000 series  
with  
internal pulley,  
white / grey / black



**6272-2000**  
intermediate pulley  
6000 series white /  
grey / black



**6275-3000**  
carrier 6200 PRS  
without overlap white  
/ natural  
metallic / zwart

### Curtain transport




**4020**  
heavy duty glider  
white / grey /  
black



**4030**  
roller  
white / black



**6009**  
glider white for  
Pilot Release  
System (PRS)




**6010**  
projection glider  
white / grey /  
black

### Mounting



**6055-1000**  
ceiling fixing plate  
white / natural  
metallic / black



**6055-2000**  
profile insert for  
recessed fixing  
grey, incl. screw  
35mm white /  
grey / black



**4055-30**  
susp. hanger  
mounting set  
white / natural /  
black



**4055-40**  
susp. hanger tube  
1 side thread  
50 cm / 100 cm  
/ 150 cm  
white / natural /  
black



**4064-10**  
base plate white /  
natural metallic /  
black




**4064-30**  
mounting set  
white




**4064-40**  
hanger tube  
70 / 120 / 150 /  
200 cm  
white / natural  
metallic



**6051**  
wall bracket  
white / grey / black




**6015**  
extension bracket  
5, 7.5, 10, 15 cm  
white / natural  
metallic / black




**6017**  
extension bracket,  
can be cut 7-15 cm  
white / natural  
metallic / black

### Accessories



**6059-1000**  
wall return set  
15cm white

## Controls



**6048-1001-03**  
momentary paddle  
switch, surface mount  
3m cable 6034-D4



**6045-2200**  
receiver RF grey (Nice)  
for 6000 series white /  
grey / black




**6045-001G/2G/3G**  
1/2/3 channel RF  
transmitter (Nice)




**6045-006G**  
6 channel RF  
transmitter (Nice)



**6045-080G**  
80 channel RF  
transmitter (Nice)



**6045-WAXO**  
table support  
ONDO incl. magn.  
wall bracket white



**6045-WSWO**  
wall plate OPLA-S  
square white



**Goelst UK Ltd**

Crimple Court | Hornbeam Park | Harrogate | HG2 8PB

Tel 01423 873002 | Fax 01423 874006 | [info@goelstuk.com](mailto:info@goelstuk.com) | [www.goelst.co.uk](http://www.goelst.co.uk)