



6200

hand-drawn

for light, medium- and heavy-weight curtains



**Luxurious and
sturdy track**





6200

hand-drawn luxurious & sturdy

The Goelst 6200 profile is suitable for practically all curtain fabrics ranging from standard sheers to heavy theatre curtains. It can be mounted invisibly on a ceiling using fixing clamps and is also available with various wall supports. A popular track that can be used in a wide variety of situations, such as private homes, theatres and offices.

- The ideal track for light, medium-heavy or heavy curtains.
- Easy to bend and exceptional quality.
- Can be forward or reverse bent in different radii
- Compatible with the Goelst Flow System for regularly pleated curtains.
- Silent and smooth running, also round bends.
- Suitable for incorporating the Load Release System.



Standard colours

RAL 9010 white	RAL 9006 natural metallic	RAL 9005 black


High quality, wear-resistant coating, highly colourfast, UV-resistant.
Other RAL colours & special coatings on request.

Features

Material:	aluminium
Colour:	white, natural metallic, black
Dimensions:	22 x 31 mm
Weight profile:	567 gr/m ¹
Mounting:	wall or ceiling

Profile specifications

Aluminium profile:



Colours with RAL code and lengths (m):

	RAL	4	5	6	7
white	9010	•		•	•
natural metallic	9006	•		•	•
black				•	

Mounting surface:

- wood
- masonry/concrete

Bracket type:

- ceiling bracket
- wall bracket
- spacer bracket

Bending:

bending radius	bending tool
R 20 cm	1015
R 30 cm	1015
R 40 cm	1015
R 50 cm	1015
R > 100 cm	1018




Flow

The Goelst Flow System keeps pleats in curtains consistent. It can be used with small and wide channel tracks and, because of the broad assortment of components, it can be integrated in hand-drawn, cord-pulled and electrically operated systems.


The Flow System can also be used with curved curtain tracks. For further information, see the Flow product data sheet.




Mounting

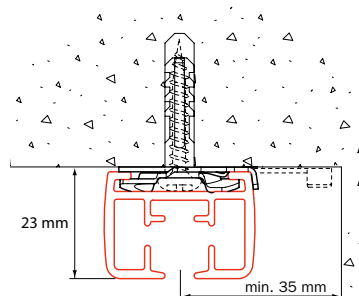


Ceiling mounting with fixing clamp 6050: allow room for tightening the clamp.

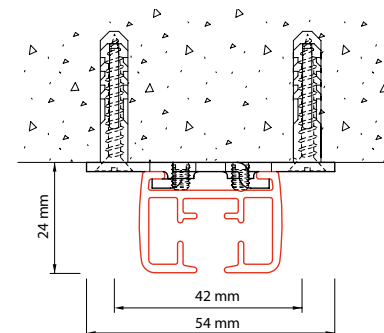

Ceiling mounting with bracket 6055-1000

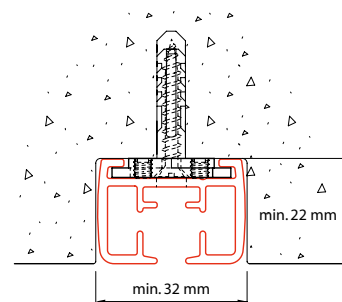


Concealed mounting on or in a ceiling with bracket 6055-2000

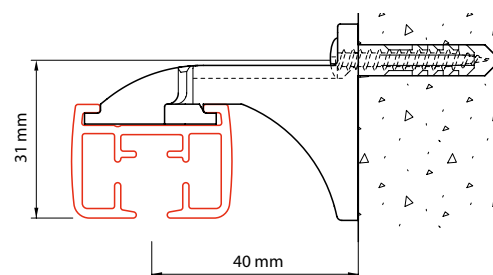


Wall mounting with bracket 6051


Mounting guideline



The distance between the brackets can vary depending on the following factors: the mounting surface (wood, concrete or plaster), the weight of the curtains and the curtain fabric production method, the specific application and the system usage intensity. General advice: with the curtains open, place additional brackets where the pleats bunch together. Also place additional brackets before and after bends.

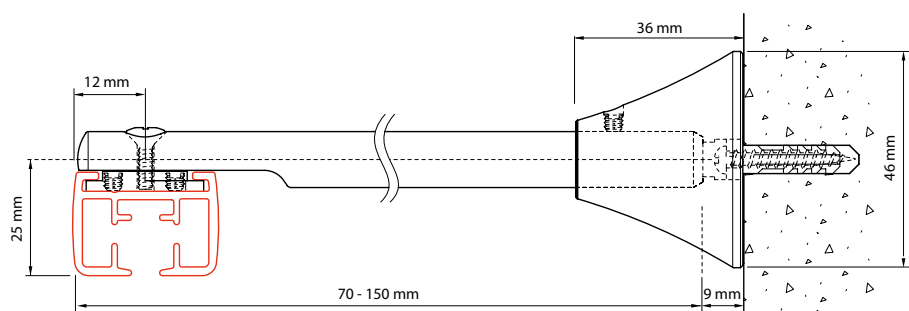

Wall mounting with adjustable extension bracket
6017, can be shortened from 15 to 7 cm.

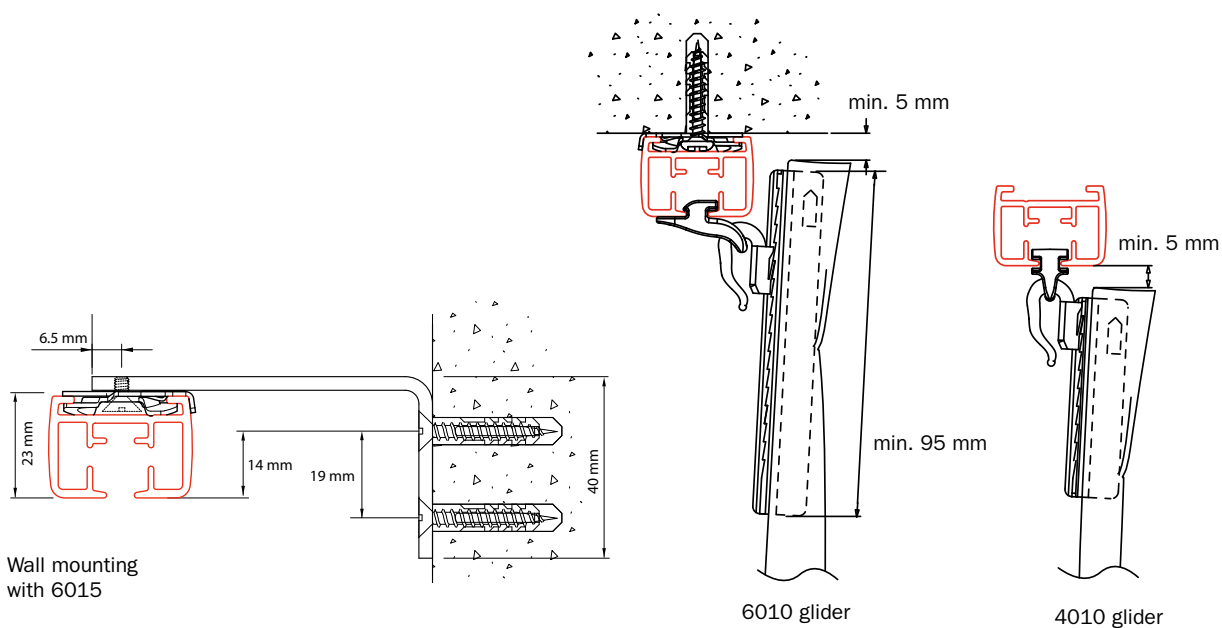


Specification guide

Material


- Aluminium EN AW-6060-T66.
- Anodised in accordance with the Qualanod standard.
- Powder coated in accordance with the Qualicoat standard.

Standard parts


Curtain transport

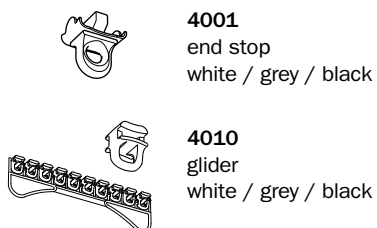

Mounting


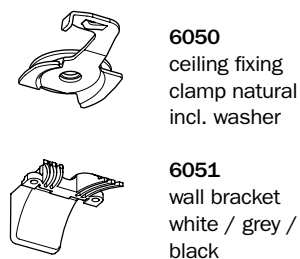


Accessories




Optional parts


Curtain transport

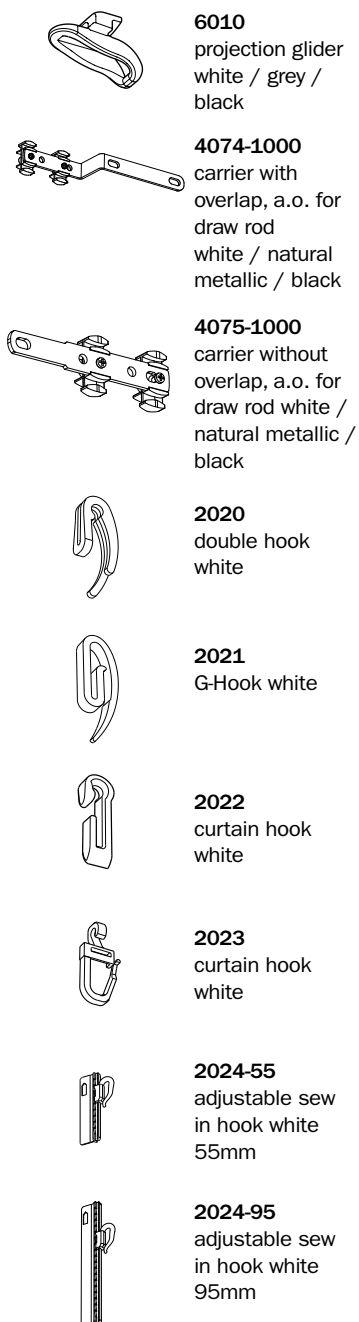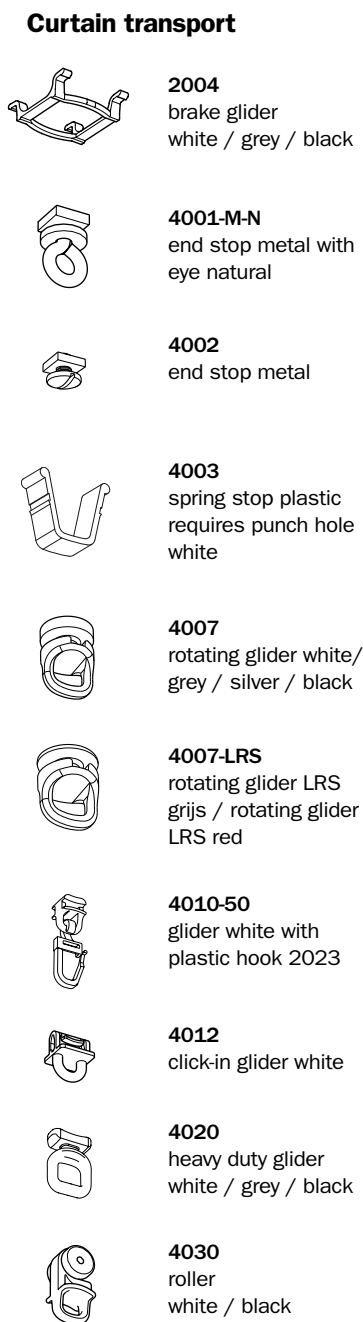

Mounting

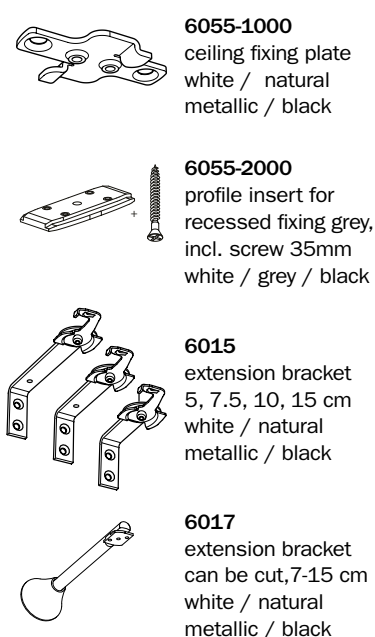

Accessories





Goelst UK Ltd

Crimple Court | Hornbeam Park | Harrogate | HG2 8PB
Tel 01423 873002 | Fax 01423 874006 | info@goelstuk.com | www.goelst.co.uk