


46

WILLOW

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1: B ₁ -s1 ASTM E-648: Class 1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% ECONYL® yarn 100% regenerated solution dyed nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	back2back: standard carpet tile backing with minimum 70% post-industrial recycled content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.600 g/m ² Ca. 135,7 oz./yd ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHEIT WATERECHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 880 g/m ² Ca. 25,9 oz./yd ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0.086 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 630 g/m ² Ca. 18,6 oz./yd ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : 27 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,8 mm Ca. 0,31"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15 Hz 125 250 500 1000 2000 4000 α _s 0,00 0,06 0,08 0,19 0,37 0,47
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 4,3 mm Ca. 0,17"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,146 g/cm ³ Ca. 3.937 oz./yd ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1 x 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 225.000 /m ² Ca. 188.127 /yd ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 cm x 50 cm 19,7" x 19,7" box: 5 m ² 5,98 yd ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN 985 A : continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	EED994FB
		LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulyss is member of DGNB, the German Sustainable Building Council.

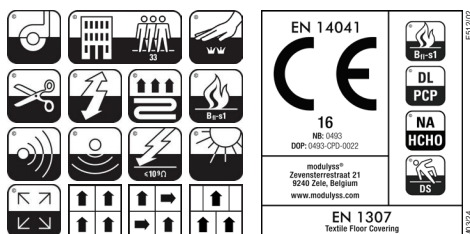

modulyss®
Zevensterrestraat 21
B 9240 Zele
T +32 (0)52 80 80 80
F +32 (0)52 80 82 00
info@modulyss.com
www.modulyss.com

We reserve all rights for technical improvements. Technische wijzigingen bij het ontwerp van het product, worden voortschudt. Sonu idem se de tous modifications techniques avant il l'information contraire de nos produits.

* For more information, see the modulyss website. www.modulyss.com. Remark: Product service is based on the LEED®. LEED® certification is based on the product service. For more information, see the modulyss website. www.modulyss.com. Remark: Product service is based on the LEED®. LEED® certification is based on the product service. For more information, see the modulyss website. www.modulyss.com.