

FALL ARREST RAIL SYSTEM

APPLICATION

- ▶ Overhead runwat system suitable for fall arrest.
- ▶ Designed for use by personnel who are working at dangerous heights.
- ▶ Designed to fulfil the essential health and safety requirements of PPE directive 89/686/EEC Category III and its amendments.

TEST SPECIFICATION

Horizontally sliding fall arrest anchorage system fully tested to comply with BSEN 795:1997.

Class D and CE type approved.

GEAR SPECIFICATION

Track: 301H

Material: galvanised steel

Standard Lengths: 1800mm, 2000mm, 2500mm, 3000mm, 4000mm, and 6000mm


Hangers: 56A/FA

Hangers are fitted with steel wheels on maintenance free sealed for life precision ball bearings.

All steel parts are electro-zinc plated.

Lanyard and harness is not provided by P C Henderson Ltd.

HIGH-RISE SAFETY RESTRAINT GEAR

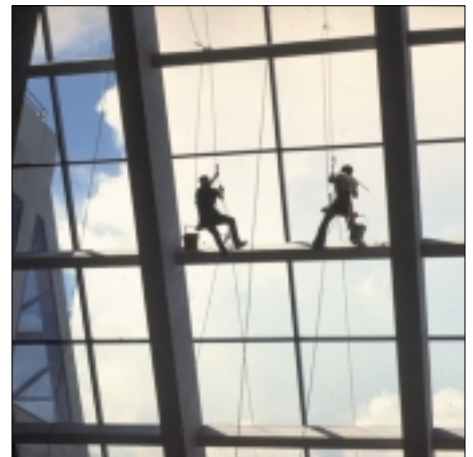

Lanyard and harness systems are not provided by P C Henderson.

FALL ARREST RAIL SYSTEM

