

Ecophon Super G™ B

For applications where the minimum possible overall depth of system is required and where there is risk of high mechanical impact. The tiles are bonded edge-to-edge directly to the soffit surface, creating a ceiling with a smooth appearance. The bevelled edges create a narrow groove between each tile. The tiles are not demountable.


The tiles are manufactured from high density glass wool utilizing the 3RD Technology. The visible surface is a strong glass fibre fabric and the back of the tile is covered with glass tissue. The edges are painted. The weight is approximately 5 kg/m².

Ecophon recommend Connect Absorber Glue for a quick and easy installation.



Ganvngården, Vesterbro, Copenhagen, Denmark

SYSTEM RANGE



Size, mm	600x600
Direct	•
Thickness	40
Inst. Diag.	M298



Super G B tile



Section of Super G B system



Super G B system




Acoustic

Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.

α_p Practical sound absorption coefficient

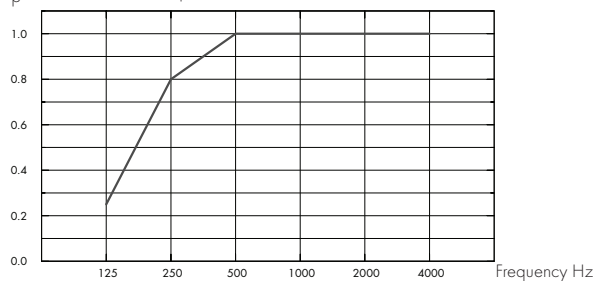

– Super G B 40 mm, 43 mm o.d.s.

o.d.s = overall depth of system

THK mm	o.d.s. mm	α_p Practical sound absorption coefficient						α_w	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
40	43	0,25	0,80	1,00	1,00	1,00	1,00	1,00	A



Accessibility

The tiles are demountable.



Cleanability

Daily dusting and vacuum cleaning. Weekly wet wiping.



Visual appearance

White 085. Nearest NCS colour sample: S 1002-Y. Light reflectance: 78%.



Influence of climate

The tiles withstand a permanent ambient RH up to 95% at 30°C without sagging, warping or delaminating (ISO 4611).



Indoor Climate

Certificate / Label

Europe

EN
13501-1





Environmental influence

Certificate / Label

Europe

EN
13501-1

Fully recyclable.



Fire safety

Country

Europe

Standard

EN 13501-1

Class

A2-s1,d0

The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. The systems are classified as fire protective covering according to NT FIRE 003.



Mechanical properties

M298 is tested and classified as 3A according to EN 13964 annex D. Additional live load has to be fixed to the soffit.




Installation

Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification. Rendered surfaces must have sufficient strength to be able to carry the load imposed by the tiles. If doubts, test gluing should be carried out. The surface should always be dry and clean. For best result the surface should be even. Install tiles according to arrows.



CE


The CE marking confirms important product performance such as sound absorption, emissions, fire safety and load bearing capacity. All Ecophon ceiling products are CE marked according to European standard EN13964, and individual product performance is declared in Declaration of Performance (DoP) documents.

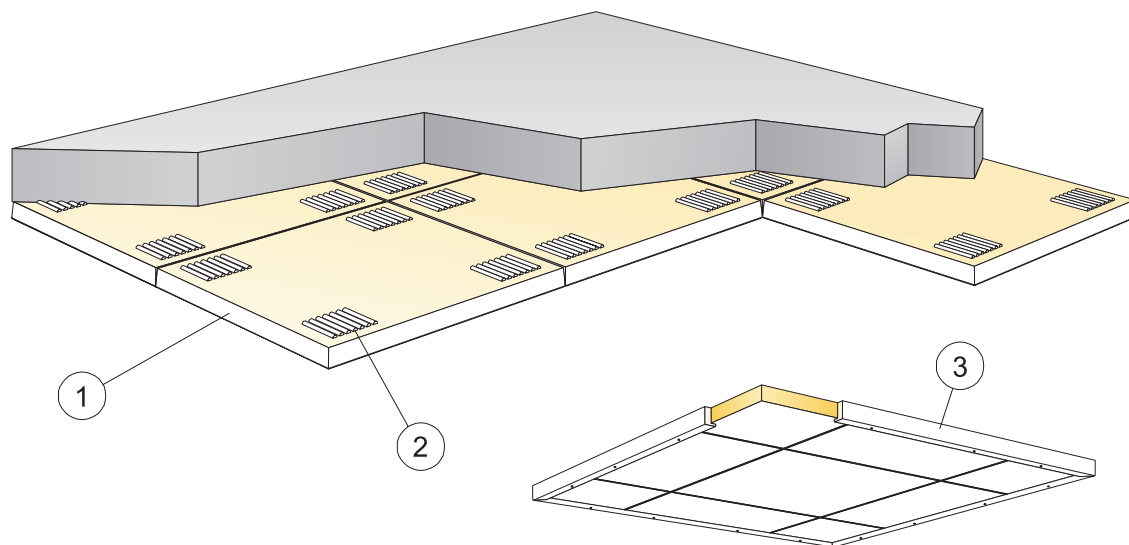


© Ecophon Group

QUANTITY SPECIFICATION (EXCL. WASTAGE)


		Size, mm
		600x600
1	Super G B	2,8/m ²
2	Connect Absorber glue [0,25 l/m ² - 0,4 l/m ² depending on installation conditions] (10 Litres)	as required
3	For installation of ceiling in islands: Connect Wood trim 2571, L=3000	as required
Δ Min. overall depth of system: 43 mm		-
δ Min. demounting depth: The system is non-demountable		-
Cut visible edges should be painted		-

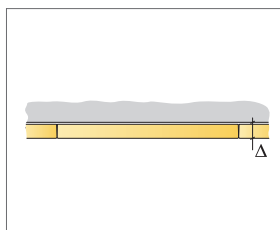

See Quantity specification

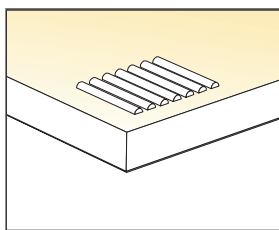

Application of glue

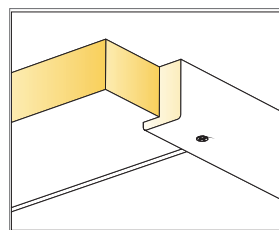

Wood trim for floating installation

Size, mm	Max live load [N]	Min load bearing capacity [N]
600x600	-	-

Live load/load bearing capacity