

FINGER PROTECTION DEVICES

FP200

Application

- Suitable for most single and double action doors including automatic doors
- Roller system finger protection.

Description

- Provides effective protection against fingers being accidentally trapped on the hinge side of the door
- Strong fire retardant fabric material is kept under constant tension and is designed to cover the gap between the door and frame automatically when the door is opened
- Features an easy clean aluminium housing

Technical Data

Roller system specifications:

- Cycle tested to 1,000,000 operations
- Maximum length: 2500mm
- Standard length: 1925mm
- Minimum length: 325mm
- Maximum fabric travel: 260mm
- Suitable for use on 60min fire doors



Fabric colour




Black

Housing finish options



White (RAL 9016)



Satin Anodised Aluminium (SAA)




Dark Bronze Anodised (DBA)

RAL colour match available on request (POA). Please contact us to enquire.


FP200X

- Standard length: 2015mm
- EN16005 compliant for automatic doors
- Maximum fabric travel: 260mm

Application

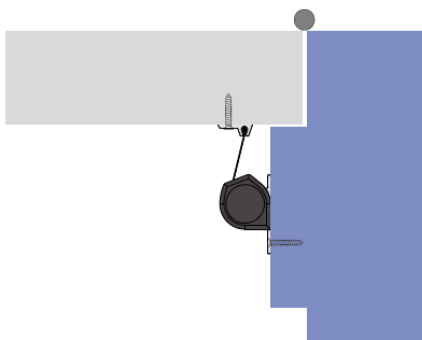

Dimensions

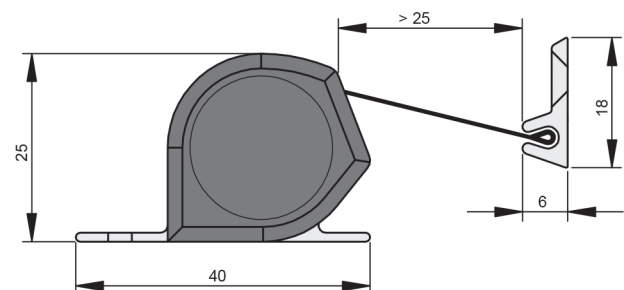

Awarded German Safety Mark and certified to EN16654

