

## SUSPENSION SYSTEMS CATALOGUE 2016

Inspiring Great Spaces™

**Armstrong®**

CEILING SYSTEMS

# ARMSTRONG SUSPENSION SYSTEMS

## SUMMARY

Armstrong's philosophy	03	<b>5 METAL HOOK-ON SYSTEMS</b>	
Armstrong's life cycle approach to ceiling systems	04	C-Profile	50
The suspension systems range	06	J-Bar	52
		H-Profile	54
		C-Profile Tartan	56
<b>1 LAY-IN SYSTEMS</b>		<b>6 METAL LAY-IN SYSTEMS</b>	
<b>GENERAL APPLICATIONS</b>		L-Profile	58
Prelude 15 - TL & XL <sup>2</sup>	10	<b>7 METAL CORRIDOR SOLUTIONS</b>	
Prelude 24 - TLX	12	Half DP12 A-Bar / J-Bar / G-Profile	60
Prelude 24 - XL <sup>2</sup>	14	<b>8 FLOATING CEILINGS</b>	
Prelude 24 Sixty <sup>2</sup>	16	<b>BAFFLES</b>	
Prelude 24 Sixty <sup>2</sup> Corridor	19	METAL Baffles / V-P 500 / V-K 500	62
Prelude 35 & Prelude 35 Sixty <sup>2</sup> - XL <sup>2</sup>	20	OPTIMA Baffles	64
Bandraster	22	<b>CANOPIES</b>	
System Z Prelude 24 / Bandraster / Corridor	24	OPTIMA Canopy Range	64
<b>DESIGN OPTIONS</b>		METAL Canopy / EASY Canopy	66
Silhouette - XL <sup>2</sup>	26	AXIOM C Canopy	68
Interlude HRC - XL <sup>2</sup>	28	AXIOM C Canopy SL2 Planks	70
<b>SPECIFIC APPLICATIONS</b>		AXIOM KE Canopy	72
Prelude 24 Corrosive Resistant	30	AXIOM Circle & Curved Canopy	74
Clean Room 24	32	AXIOM L Canopy	76
Seismic Rx <sup>®</sup> System	34	<b>9 PERIMETER DETAILING</b>	
<b>2 DRYWALL GRID SYSTEM (DGS)</b>		AXIOM Profiles	78
Drywall Grid System	36	AXIOM Transitions	80
DGS Shortspan Corridor	37	AXIOM Blind boxes	82
		AXIOM Perimeter angles / channels	84
<b>3 PRIMARY GRID SYSTEM</b>		Perimeter trims & bulkheads	86
Longspan	38	Perimeter trims	88
U-Profile system	40	<b>ACCESSORIES</b>	90
C-Channel system	44	<b>TECHNICAL INFORMATION</b>	102
<b>4 METAL CLIP-IN SYSTEMS</b>			
DP12 A-Bar	46		
Spring-T	48		

# ARMSTRONG'S PHILOSOPHY

## PHILOSOPHY

### ● TOTAL CEILING SOLUTIONS

The suspension system product range forms an integral part of Armstrong's total ceiling solutions policy. Armstrong's extensive portfolio of ceiling systems provides solutions for all types of spaces in the widest choice of designs and materials to fulfill the requirements of modern building designs.

### ● QUALITY

Armstrong suspension systems are manufactured by Armstrong's joint venture company WAVE (Worthington Armstrong Venture), utilising the expertise of the global steel specialists Worthington, and also through alliances with other companies regarded as specialists in their fields of engineering. Armstrong operates on a global basis and brings world class practice and the most technologically advanced equipment to it's suspension systems manufacturing operations.

### ● INTEGRATION

Our suspension systems are designed to not only coordinate with the complete portfolio of Armstrong ceiling products whether mineral, metal, mesh, wood or custom solutions, but to also integrate with all types of service elements including lighting and HVAC.

### ● MANUFACTURING FOOTPRINT

Armstrong has three grid manufacturing locations in Europe, one in India, one in China plus a further three in the USA, including Aberdeen, Maryland, which is one of the world's largest grid facilities. Our global manufacturing footprint allows us to produce product close to market yet take advantage of specialist knowledge, product capabilities and manufacturing support from different production facilities.

In addition to our three European manufacturing plants, which are strategically located to serve all our European customers, Armstrong has numerous distribution centres where both tiles and grid are stocked. This allows our customers the convenience of mixed product shipments combining suspension systems with other Armstrong ceiling products and short lead-times for deliveries.






# ARMSTRONG'S LIFE CYCLE APPROACH...

# ...TO CEILING SYSTEMS

● OUR LIFE-CYCLE APPROACH STARTS WITH DESIGN

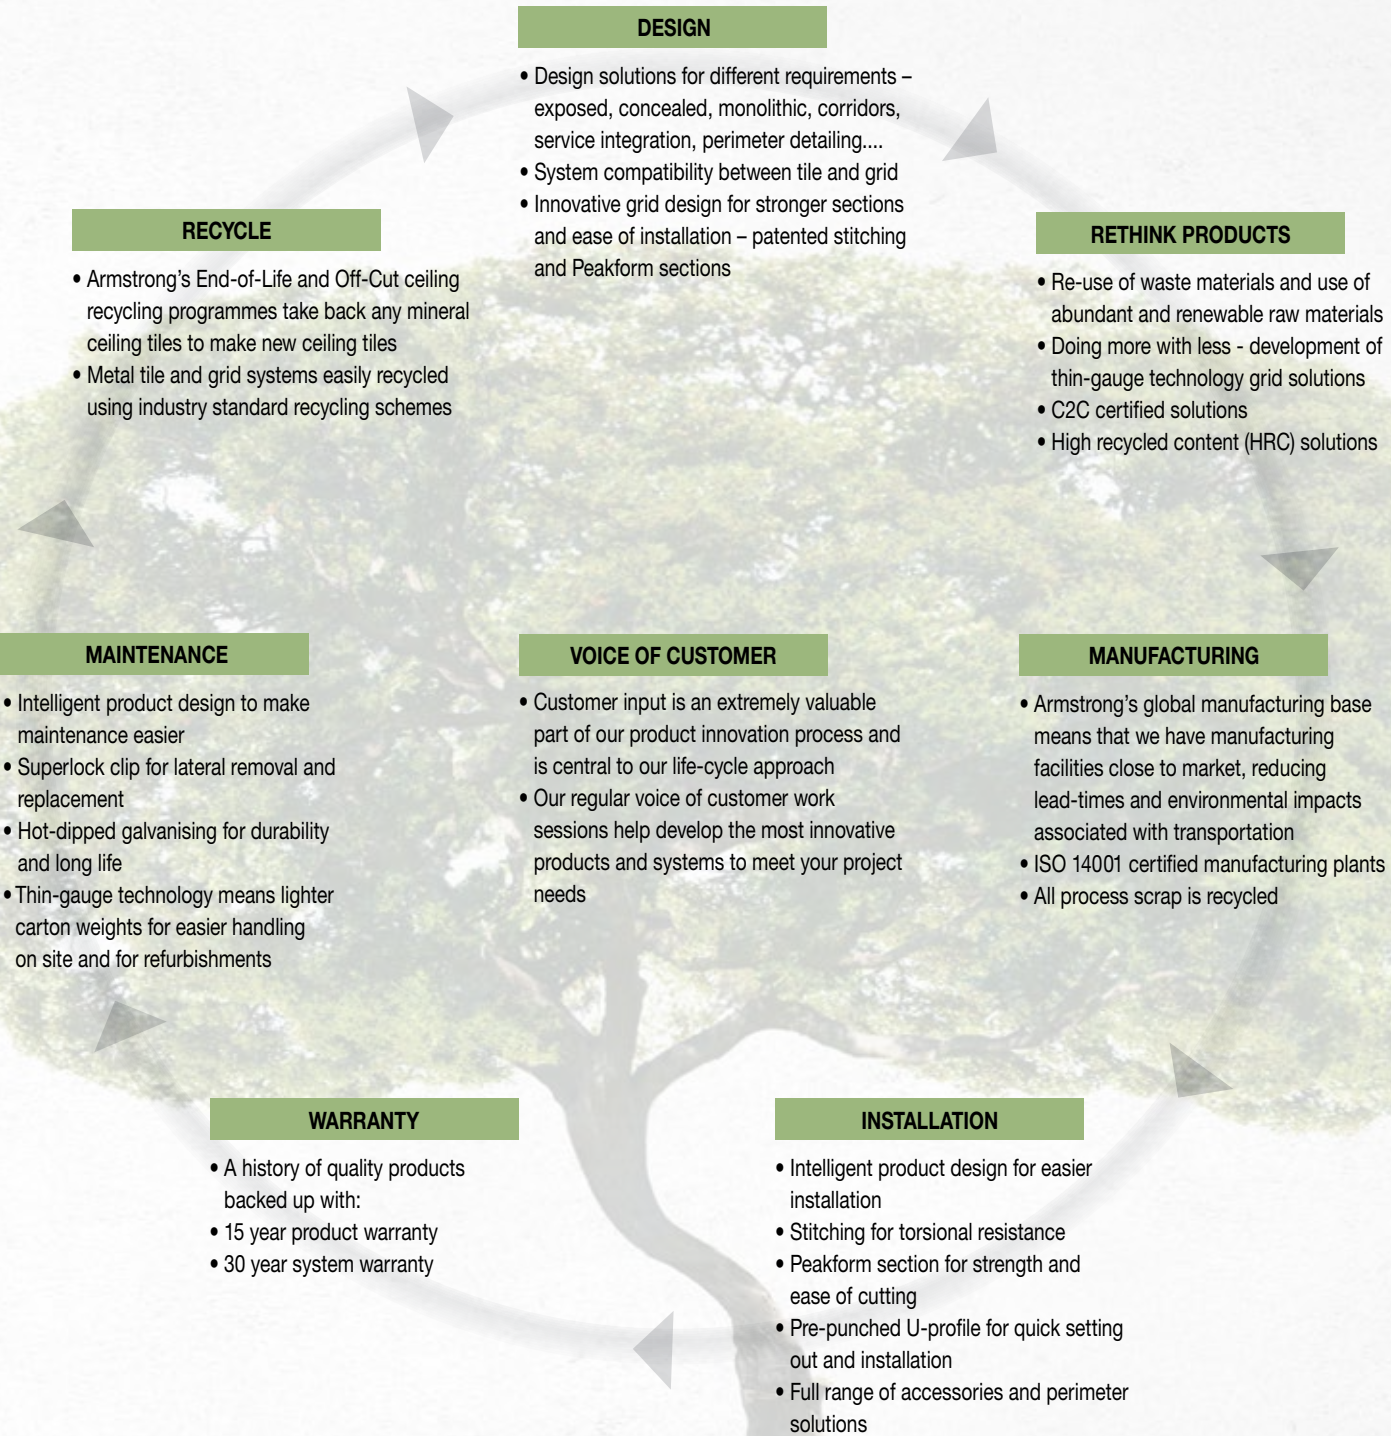

Queen Elizabeth University Hospital, Glasgow (UK)  
Off-cut recycling project - 10 000 m² saved from landfill  
Products: BIOGUARD Acoustic / DGS / AXIOM Profiles / AXIOM Transitions  
Architect: IBI Group



# THE SUSPENSION SYSTEMS RANGE

Armstrong suspension systems include a full range of solutions and detailing for all ceiling suspension requirements.

## ● GENERAL APPLICATIONS

A range of standard exposed grid suspensions systems including Prelude 15, Prelude 24, Prelude 24 Sixty<sup>2</sup> for longer spans, Prelude 35 and Bandraster.

**▲ PEAKFORM** – Most profiles in the Prelude range of grids feature the innovative Peakform design which is taller and engineered to create stronger, more stable suspension systems. The Peakform shape makes Main Runners and Cross Tees quicker and easier to cut.

**▲ PRELUDE UNIVERSAL MAIN RUNNER** – The Prelude Universal Main Runner supports the installation of either TLX or TL hook/butt cut Cross Tees or XL<sup>2</sup> stab/override Cross Tees from one simple inventory of Main Runners. The staked-on Superlock clip provides a tighter, secure bulb-to-bulb connection allowing Main Runners to be disconnected and reconnected laterally in low-clearance areas or in the middle of the room.

### XL<sup>2</sup> Cross Tees – “Click” installation

Prelude XL<sup>2</sup> Cross Tees in 15mm, 24mm and 35mm widths feature an advanced stab system that locates with an audible click, ensuring a solid installation at all times.


### TLX Cross Tees – “Hook” installation

TLX is a highly engineered staked-on hook solution with a patented clip. It's unique steel-based composite material and shape provide a stronger and level connection, improved fire performance and increased overall stability. Prelude TLX Cross Tees are available in 24mm width.

### TL Cross Tees – “Hook” installation

Prelude TL Cross Tees in 15mm width feature an advanced an integrally formed hook nose. This popular installation system has been a feature of Armstrong suspensions systems for over 20 years and its proven ease of assembly and precise butt cut joint has been a favourite of installers.

Alignment for XL<sup>2</sup>, TLX and TL Cross Tees is ensured by locating the tees to the right hand side of each other.

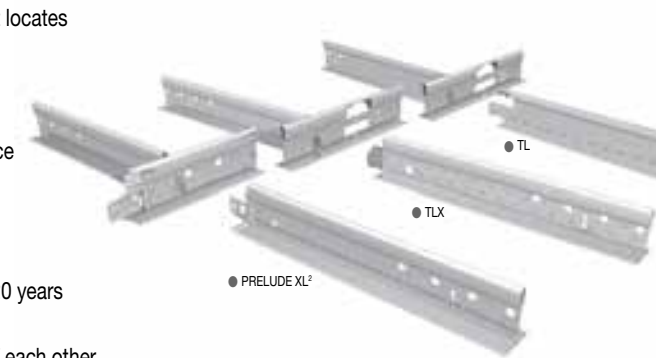

## ● DESIGNER GRID OPTIONS

Armstrong's designer grid range features two key products: Silhouette & Interlude.



Silhouette is designed to create a crisp, clean look in conjunction with Armstrong MicroLook 90, MicroLook BE and Metal MicroLook 8 tiles to provide an enhanced aesthetic.

The channel profile finishes flush with the ceiling surface leaving a minimalist 3mm or 6mm reveal.



Interlude HRC is a unique double reveal solution developed to allow flexibility of layout for creative ceiling solutions and give a clean sophisticated appearance with any Armstrong MicroLook tile.

## ● SPECIFIC APPLICATIONS & OTHER SYSTEMS


Our extensive range of performance grids offers specific solutions for more demanding applications from clean rooms to seismic installations.



Clean Room 24 is a unique co-extrusion of aluminium with a pvc gasket to create a better seal between tile and grid for clean room applications up to ISO 4 and can also be used in “non-magnetic” environments.

Prelude 24 Corrosive Resistant has a special paint finish and is designed for areas requiring enhanced corrosion resistance. The Prelude 24 Corrosive Resistant grid and accessories have surpassed 700 hours salt spray testing to EN ISO 9227.

System Z is a system providing an accessible semi-concealed appearance with ship-lap SL2 planks. Select either Prelude 24 or Bandraster as the visible grid and choose a Z-Bar or a length of Prelude 24 Butt Cut as the concealed section.



Seismic Rx<sup>®</sup> is a specific installation method for Prelude 24 grid with XL<sup>2</sup> Cross Tees combined with specialist accessories. This system is tested to withstand the forces associated with significant seismic activity, or as required for buildings with higher security requirements such as nuclear/defence establishments or transportation hubs.

Seismic testing has been also conducted on U-Profile + J-Bar and U-Profile + DP12 A-Bar systems.


Longspan is a primary grid system designed to span between roof purlins that are too far apart for standard Main Runners, or between walls when there are no or limited suspension points.

## Where innovation meets performance

### ● SOLUTIONS FOR METAL CEILINGS

A range of suspensions systems specifically for metal ceilings built around the U-Profile primary grid with a wide selection of secondary carriers – DP12 A-Bar, C-Profile, J-Bar, H-Profile, L-Profile, Bandraster – to support different metal ceiling panels.

The U-Profile is pre-punched for fast layout and installation with purpose designed hangers, brackets and accessories all fastened using the plug-in clip.

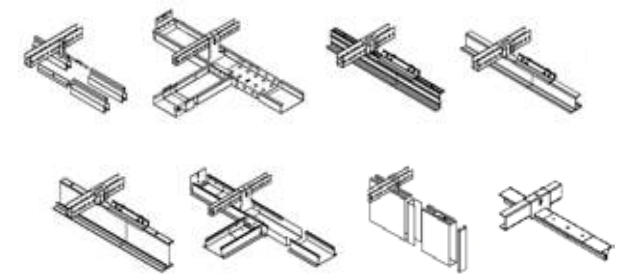

The U-Profile system can also be used to set out the V-P 500 Baffles system, whilst the C-Channel primary grid is usually used for the Spring T system.



### ● FLOATING SUSPENSION SOLUTIONS

The Armstrong range of floating ceiling solutions is extensive and varied. The full product offer can be found in our Floating Ceilings brochure.

Whilst some canopy products just require simple adjustable wires fixed directly to the back of the product, others are more detailed.

D-H 700 and D-Clip systems offer a configurable metal solution allowing designers flexibility to create bespoke ceiling rafts.

The Axiom Canopies range offers a choice of shapes, sizes and edge detailing and then you are free to choose your favourite Armstrong ceiling tile to compliment it.

### ● SOLUTIONS FOR CORRIDORS

There are multiple options for corridors to suit all material types – from System Z with SL2 planks to metal solutions such as F-Clip Access or F-H 600 to the innovative DGS Shortspan grid for plasterboard corridors.

### ● SOLUTIONS FOR PLASTERBOARD

Armstrong Drywall Grid System (DGS) is a precision engineered solution for the suspension of plasterboard ceilings. Using suspended ceiling grid technology, the DGS system allows a very quick and accurate installation, eliminating readjustment of grid members and reducing installation times compared to traditional metal furring systems. Curved plasterboard ceilings can be created on site from standard components without the need for pre-ordered curved grid.



### ● PERIMETER SOLUTIONS AND DETAILING


Axiom Transitions, Profiles and Blind Boxes compliment the traditional range of perimeter angle trims. Create changes in level, perimeter lighting features or transition to a flush plasterboard perimeter.













































### ● A FULL RANGE OF ACCESSORIES





## Standard colours



										
	GLOBAL WHITE	SILVER GREY RAL 9006	BLACK	WHITE RAL9010	GLOBAL WHITE	BRASS	CHROME	WHITE RAL9010	GALVANISED	BLACK/WHITE
Prelude 24										
Prelude 15										
Silhouette XL <sup>2</sup> 6mm										
Silhouette XL <sup>2</sup> 3mm										
Interlude HRC - XL <sup>2</sup>										
Bandraster										
Prelude 35 & Prelude 35 Sixty <sup>2</sup> - XL <sup>2</sup>										
Prelude 24 Sixty <sup>2</sup>										
Prelude 24 Corrosive Resistant										
Clean Room 24										
Axiom System										
C-Profile										
L-Profile										

## Colour pallet

- 

1000	1001*	1002	1003	1004	1005	1006	1007*	1011	1012	1013*	1014	1015*	1016	1017	1018	1019*	1020	1021*	1023	1024
1027	1028	1032	1033	1034	2000*	2001	2002*	2003	2004*	2008	2009	2010	2012	3000*	3000*	3001	3002*	3003	3004	3005
3007	3009	3011	3012	3013	3014	3015	3016	3017	3018	3020	3022	3027	3031	4001	4002	4003	4004	4005	4006	4007
4008	4009	5000	5001	5002	5003*	5004	5005	5007	5008	5009*	5010*	5011	5012*	5013	5014	5015*	5017	5018	5019	5020
5021	5022	5024	6000	6001	6002	6003	6004	6005	6006	6007	6008	6009	6010	6011*	6012	6013	6014	6015	6016	6017
6018	6019	6020	6021	6022	6024	6025	6026	6027	6028	6029	6032	7000	7002	1000	7003	7004	7005	7006	7008	7009
7010	7011	7012*	7013	7015	7016*	7021*	7022	7023	7024	7026	7030*	7031*	7032*	7033	7034	7035*	7036	7037	7038*	7039
7040*	7042	7043	7044*	8000	8001	8002	8003	8004	8007	8008	8011	8012	8014*	8015	8016	8017	8019*	8022	8023	8024
8025	8028	9001*	9002*	9003*	9004	9005*	9010*	9011*	9016*	9017	9018*									

08

[illegible]

Peakform

General Applications

Designer Grid

Specific Applications/  
Healthcare Environments

Corridor

Primary Grid Systems

Metal Systems  
(Clip-in, Hook-On, Lay-In)

Perimeter Trim

Accessories

# PRELUDE 15 - TL & XL<sup>2</sup>

## Exposed 15mm grid system

### Key Attributes

- Peakform: patented design for strength, stability and easier to cut
- Superlock clip: secure Main Runner connection for better alignment and easier to disconnect
- Rotary stitched: strength and extra stability


### Application area

Classrooms / Meeting rooms / Individual offices

### Physical data


- Material: galvanised steel
- Surface finish: baked polyester paint
- Colour: all products standard in Global White
- Other standard colours available on popular items

## PRELUDE 15 - UNIVERSAL PEAKFORM MAIN RUNNER & SUPERLOCK CLIP (bulb-to-bulb connection)

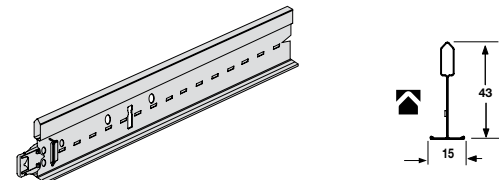


Item Nr.	Dimensions length (mm)	height (mm)	Content / pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
30 40 33 A <sup>(1)</sup>	3600	43	20	72.00	22.50	32
30 41 33 A <sup>(1)</sup>	3750	43	20	75.00	23.20	32
30 43 33 A	3375	43	20	67.50	22.50	32

## PRELUDE 15 - XL<sup>2</sup> PEAKFORM CROSSTEES (stab system, override)

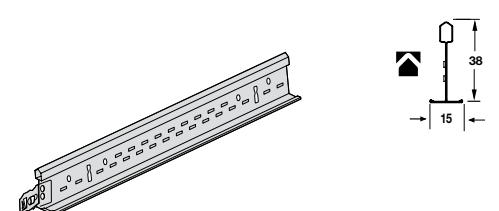

Cross Tees slotted						
30 30 33 B <sup>(1)</sup>	1200	38	60	72.00	20.70	72
30 31 33 A	1250	38	60	75.00	21.50	72
30 32 33 <sup>(2)</sup>	1000	38	60	60.00	17.20	72
Cross Tees unslotted						
30 20 33 B <sup>(1)</sup>	600	38	60	36.00	10.30	144
30 21 33 A	625	38	60	37.50	10.70	144
30 22 33 <sup>(2)</sup>	500	38	60	30.00	8.60	144

## PRELUDE 15 - TL CROSSTEES (hook system, butt cut)

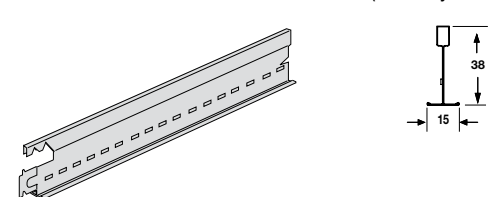

Cross Tees slotted						
10 34 33 B	1800	38	30	54.00	15.20	20
10 36 33 A	1500	38	30	45.00	14.00	20
10 33 33	1350	38	60	81.00	26.00	72
10 31 33 B <sup>(1)</sup>	1250	38	60	75.00	21.60	72
10 30 33 A <sup>(1)</sup>	1200	38	60	72.00	20.70	72
Cross Tees unslotted						
10 23 33	675	38	60	40.50	13.00	144
10 21 33 B <sup>(1)</sup>	625	38	60	37.50	10.70	144
10 20 33 A <sup>(1)</sup>	600	38	60	36.00	10.30	144
10 25 33	312.50	38	120	37.50	12.50	144
10 24 33 A	300	38	120	36.00	11.50	144
10 12 32	150	38	60	9.0	2.84	144

## SECTION DRAWINGS

### Prelude 15 - Universal Peakform Main Runners

Length	3750	78.125	156.25	21 x 156.25	156.25	78.125
3600	50	100	33 x 100	100	50	
3375	337.5	675	2 x 675	675	337.5	

### Prelude 15 - XL<sup>2</sup> Peakform Cross Tees

Length	1250	312.5	2 x 312.5	312.5
1200	300	2 x 300	300	
1000	250	2 x 250	250	

625 / 600 / 500

### Prelude 15 - TL Cross Tees


Length	1800	300	4 x 300	300
1500	300	3 x 300	300	
1350	337.5	2 x 337.5	337.5	
1250	312.5	2 x 312.5	312.5	
1200	300	2 x 300	300	

675 / 625 / 600 / 312.5 / 300 / 150

## SYSTEM DRAWING (module 600 x 600 mm)

Standard lay-in installation of 15 mm exposed suspension system for MicroLook tiles and specific Board tiles.

\*reduce to 450 if heavy tile / overlays are used or heavy service fittings are located near the perimeter.

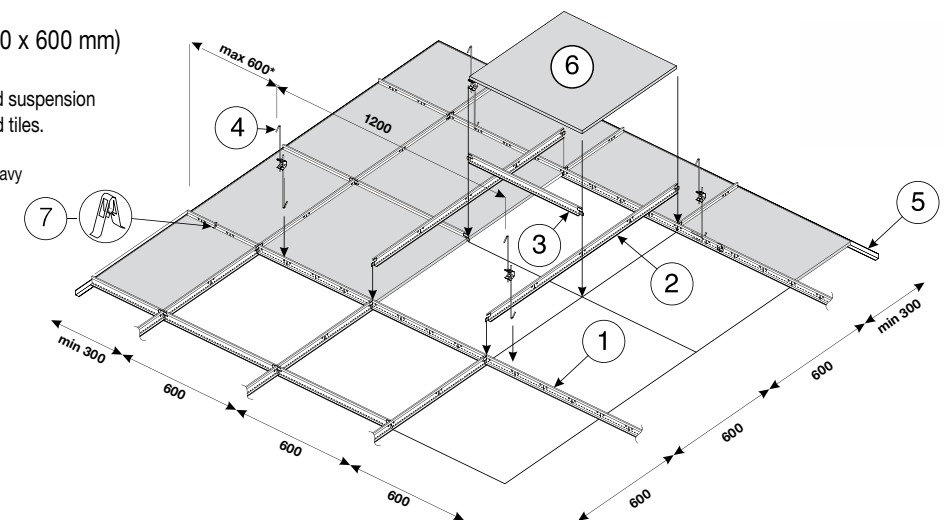

④ Tiles	Main Runner centres	Hangers centres	Quantities required per 1m² (no waste included)				
			① Main Runner	② Cross Tee 1200 mm	③ Cross Tee 600 mm	④ Hanger	⑦ Universal retaining clip
1200 x 600 mm	1200 mm	1200 mm	0.84 lm	1.67 lm	-	0.70 pcs	5.56 pcs
1.39 pcs	600 mm	1200 mm	1.67 lm	-	0.84 lm	1.40 pcs	
600 x 600 mm	1200 mm	1200 mm	0.84 lm	1.67 lm	0.84 lm	0.70 pcs	
2.78 pcs	600 mm	1200 mm	1.67 lm	-	1.67 lm	1.40 pcs	

⑤ Perimeter trim approx. 0.70 lm/m²

The chart is for general guidance only.

## GRID LOAD CAPACITIES

### Prelude 15 System

The following table gives the maximum permitted hanger distance (mm) along the Peakform Main Runner (30 40 33 A) for the tile weights and Main Runner spacings noted.

Prelude 15 Main Runner - 30 40 33 A				
Main Runner centres (mm)	1200	600	1200	600
Cross Tee(s)	30 30 33 B 30 20 33 B	30 20 33 B	10 30 33 A 10 20 33 A	10 20 33 A
Configuration (Main Runner horizontal)				
Weight of ceiling tile (kg/m²)	Maximum suspension spacing along Main Runner (mm)			
2.5 kg/m²	1900	2100	1900	2100
3.0 kg/m²	1800	2100	1800	2100
3.5 kg/m²	1750	2100	1750	2100
4.0 kg/m²	1650	2050	1650	2050
5.0 kg/m²	1550	2000	1550	2000
5.5 kg/m²	1550	1950	1550	1950
6.0 kg/m²	1500	1900	1500	1900
7.0 kg/m²	1400	1800	1400	1800
8.5 kg/m²	1300	1700	1300	1700
10.5 kg/m²	1150	1600	1150	1600
13.0 kg/m²	1050	1500	1050	1500
14.0 kg/m²	-	-	1000	1450

- Values in the above table conform to Class 1 as defined in EN 13964:2004+A1:2006 table 6.
- For other classes /deflection limits please contact your local Armstrong Technical Sales team.

- Values are determined from laboratory tests methods in accordance with EN 13964:2004+A1:2006 clause 5.
- Values are applicable for 600 x 600 mm tiles assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span).
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, see the grid loading technical section on pages 102-103.



All products standard in Global White. Other standard colours available for item numbers with index (1) or (2). See details below.  
(1) Colours available: Black (BK), RAL 9006 (SG), Brass (BS), Chrome (CE), White RAL 9010 (WR).  
(2) Also available in RAL 9010 (WR).  
Cross Tee alignment is achieved by locating the tees to the right-hand side of the adjoining section.  
All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# PRELUDE 24 - TLX

## Exposed 24mm grid system

### Key Attributes

- Peakform: patented design for strength, stability and easier to cut
- Superlock clip: secure Main Runner connection for better alignment and easier to disconnect
- Unique steel based TLX composite clip for strength, fire performance and better alignment
- Rotary stitched: strength and extra stability


### Application area

Classrooms / Meeting rooms / Individual offices

### Physical data


- Material: galvanised steel
- Surface finish: baked polyester paint
- Colour: all products standard in Global White
- Other standard colours available on popular items

## PRELUDE 24 - UNIVERSAL PEAKFORM MAIN RUNNER & SUPERLOCK CLIP (bulb-to-bulb connection)

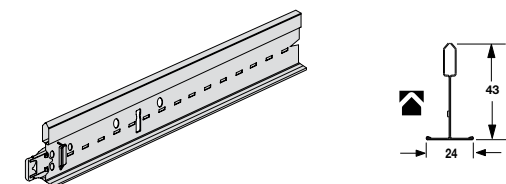

Item Nr.	Dimensions length (mm)	height (mm)	Content / pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
31 40 32 A <sup>(1)</sup>	3600	43	20	72.00	21.00	30
31 41 33 B <sup>(1)</sup>	3750	43	20	75.00	21.90	30
31 43 33 A	3375	43	20	67.50	20.00	30
31 42 32	3000	43	20	60.00	17.50	30

## PRELUDE 24 - TLX CROSSTEES (hook system, butt cut)

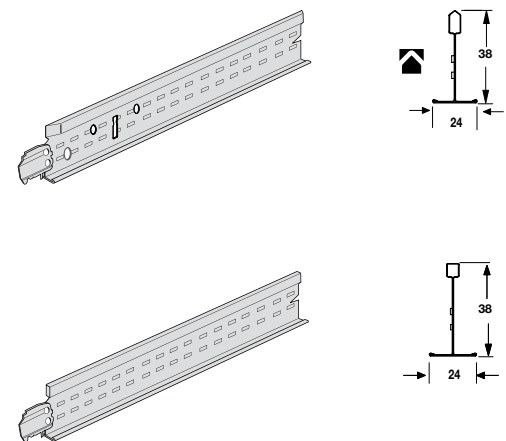

### Cross Tees slotted

13 31 31 <sup>(1)</sup>	1250	38	60	75.00	18.90	72
13 30 31 <sup>(1)</sup>	1200	38	60	72.00	18.10	72
13 10 32	1875	38	60	56.20	17.80	20
13 34 32	1800	38	60	54.00	17.10	20
13 50 32	1724	38	60	51.70	16.50	20
13 36 32	1500	38	60	45.00	14.50	20
13 33 31	1350	38	60	81.00	19.60	20
13 32 32	1000	38	60	60.00	19.40	72

### Cross Tees unslotted

13 18 31	900	38	60	54.00	13.60	72
13 16 31	750	38	60	45.00	11.40	72
13 21 31	625	38	60	37.50	9.50	144
13 20 31 <sup>(1)</sup>	600	38	60	36.00	9.10	144
13 23 31	675	38	60	40.50	8.70	144
13 22 32	500	38	60	30.00	9.70	80


## SECTION DRAWINGS

### Prelude 24 - Universal Peakform Main Runners

Length	78.125	156.25	21 x 156.25	156.25	78.125
3600	50	100	33 x 100	100	50
3375	337.5	675	2 x 675	675	337.5
3000	50	100	27 x 100	100	50

### Prelude 24 - TLX Cross Tees


Length	312.5	4 x 312.5	312.5
1875	300	4 x 300	300
1724	262	4 x 300	262
1500	150	350 / 2 x 250 / 350	150
1350	337.5	2 x 337.5	337.5
1250	312.5	2 x 312.5	312.5
1200	300	2 x 300	300
1000	250	2 x 250	250

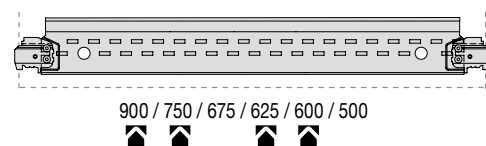

## SYSTEM DRAWING (module 1200 x 600 mm)

Standard lay-in installation of 24 mm exposed suspension system using Board, Tegular or Vector edge tiles.

\*reduce to 450 if heavy tile / overlays are used or heavy service fittings are located near the perimeter.

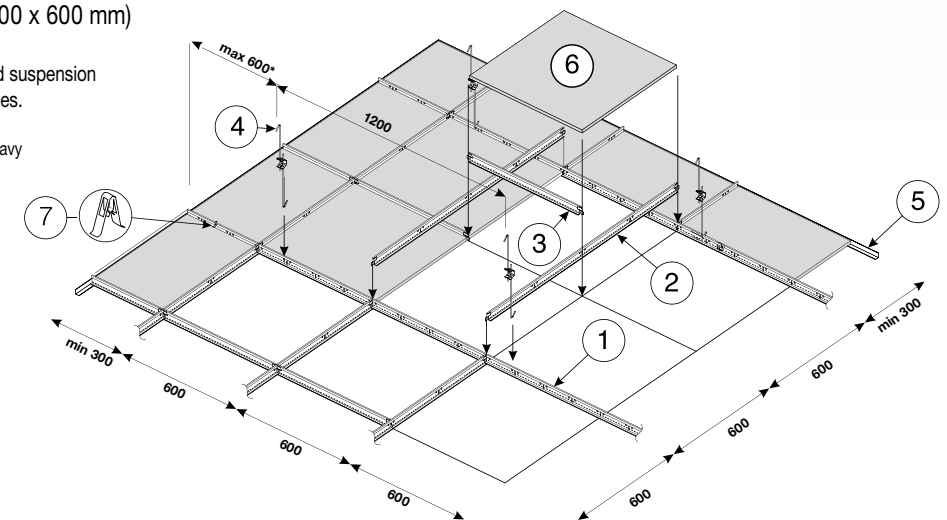

⑥ Tiles	Main Runner centres	Hangers centres	Quantities required per 1m <sup>2</sup> (no waste included)				⑦ Universal retaining clip
			① Main Runner	② Cross Tee 1200 mm	③ Cross Tee 600 mm	④ Hanger	
1200 x 600 mm	1200 mm	1200 mm	0.84 lm	1.67 lm	-	0.70 pcs	5.56 pcs
1.39 pcs	600 mm	1200 mm	1.67 lm	-	0.84 lm	1.40 pcs	
600 x 600 mm	1200 mm	1200 mm	0.84 lm	1.67 lm	0.84 lm	0.70 pcs	
2.78 pcs	600 mm	1200 mm	1.67 lm	-	1.67 lm	1.40 pcs	

⑤ Perimeter trim approx. 0.70 lm/m<sup>2</sup>

The chart is for general guidance only.

## GRID LOAD CAPACITIES

### Prelude 24 - TLX

The following table gives the maximum permitted hanger distance (mm) along the Peakform Main Runner for the tile weights and Main Runner spacings noted.

Prelude 24 Main Runner - 31 40 32 A			
Main Runner centres (mm)	1800	1200	600
Cross Tee(s)	13 34 32 13 20 31	13 30 31 13 20 31	13 20 31
Configuration (Main Runner horizontal)			
Weight of ceiling tile (kg/m <sup>2</sup> )	Maximum suspension spacing along Main Runner (mm)		
2.5 kg/m <sup>2</sup>	1650	1900	2100
3.0 kg/m <sup>2</sup>	1600	1800	2100
3.5 kg/m <sup>2</sup>	1500	1750	2100
4.0 kg/m <sup>2</sup>	1450	1650	2050
5.0 kg/m <sup>2</sup>	1350	1550	2000
5.5 kg/m <sup>2</sup>	1350	1550	1950
6.0 kg/m <sup>2</sup>	1250	1500	1900
7.0 kg/m <sup>2</sup>	-	1400	1800
8.5 kg/m <sup>2</sup>	-	1300	1700
10.5 kg/m <sup>2</sup>	-	1200	1600
13.0 kg/m <sup>2</sup>	-	1050	1500
14.0 kg/m <sup>2</sup>	-	1000	1450

- Values in the above table conform to Class 1 as defined in EN 13964:2004 +A1:2006 table 6.
- For other classes /deflection limits please contact your local Armstrong Technical Sales team.
- Values are determined from laboratory tests methods in accordance with EN 13964:2004+A1:2006 clause 5.
- Values are applicable for 600 x 600 mm tiles assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span).
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, see the grid loading technical section on pages 102-103.



All products standard in Global White. Other standard colours available for item numbers with index (1) or (2). See details below.  
(1) Colours available: Black (BK), RAL 9006 (SG), Brass (BS), Chrome (CE) and White RAL 9010 (WR). Cross Tee alignment is achieved by locating the tees to the right-hand side of the adjoining section.  
All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# PRELUDE 24 - XL<sup>2</sup>

## Exposed 24mm grid system

### Key Attributes

- Peakform: patented design for strength, stability and easier to cut
- Superlock clip: secure Main Runner connection for better alignment and easier to disconnect
- Rotary stitched: strength and extra stability


### Application area

Classrooms / Meeting rooms / Individual offices

### Physical data


- Material: galvanised steel
- Surface finish: baked polyester paint
- Colour: all products standard in Global White
- Other standard colours available on popular items

## PRELUDE 24 - UNIVERSAL PEAKFORM MAIN RUNNER & SUPERLOCK CLIP (bulb-to-bulb connection)

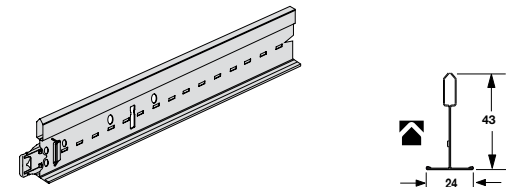

Item Nr.	Dimensions length (mm)	height (mm)	Content / Carton pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
31 40 32 A <sup>(1)</sup>	3600	43	20	72.00	21.00	30
31 41 33 B <sup>(1)</sup>	3750	43	20	75.00	21.90	30
31 43 33 A	3375	43	20	67.50	20.00	30
31 42 32	3000	43	20	60.00	17.50	30

## PRELUDE 24 - XL<sup>2</sup> CROSS TEES (stab system, override)

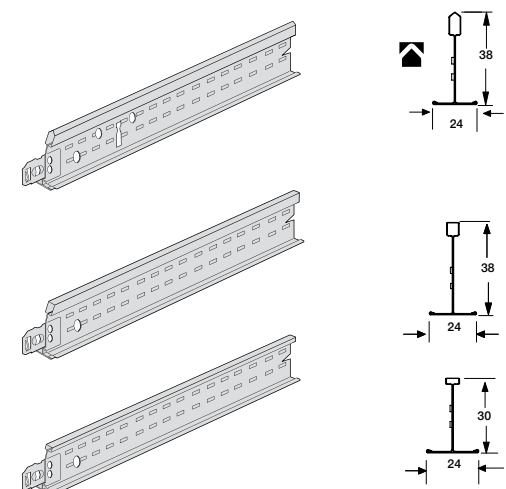

### Cross Tees slotted

31 33 31	1350	38	60	81.00	17.20	20
31 31 51 B <sup>(1)</sup>	1250	38	60	75.00	18.90	72
31 30 51 B <sup>(1)</sup>	1200	38	60	72.00	18.20	72
31 32 31 <sup>(2)</sup>	1000	38	60	60.00	15.10	42
31 34 31 A	1800	38	30	54.00	17.00	20

### Cross Tees unslotted

31 16 32	750	38	60	45.00	14.70	72
31 25 32	312.5	38	60	18.75	4.60	144
31 24 32	300	38	60	18.00	4.60	144
31 23 21	675	30	60	40.50	7.70	144
31 21 23 A <sup>(1)</sup>	625	30	60	37.50	8.60	144
31 20 21 A <sup>(1)</sup>	600	30	60	36.00	8.20	144
31 22 21 <sup>(2)</sup>	500	30	60	30.00	6.80	84

## SECTION DRAWINGS

### Prelude 24 - Universal Peakform Main Runners

Length					
3750	78.125	156.25	21 x 156.25	156.25	78.125
3600	50	100	33 x 100	100	50
3375	337.5	675	2 x 675	675	337.5
3000	50	100	27 x 100	100	50


### Prelude 24 - XL<sup>2</sup> Cross Tees

Length			
1800	300	4 x 300	300
1350	337.5	2 x 337.5	337.5
1250	312.5	2 x 312.5	312.5
1200	300	2 x 300	300
1000	250	2 x 250	250

## SYSTEM DRAWING (module 1200 x 600 mm)

Standard lay-in installation of 24 mm exposed suspension system using Board, Tegular or Vector tiles.

\*reduce to 450 if heavy tile / overlays are used or heavy service fittings are located near the perimeter.

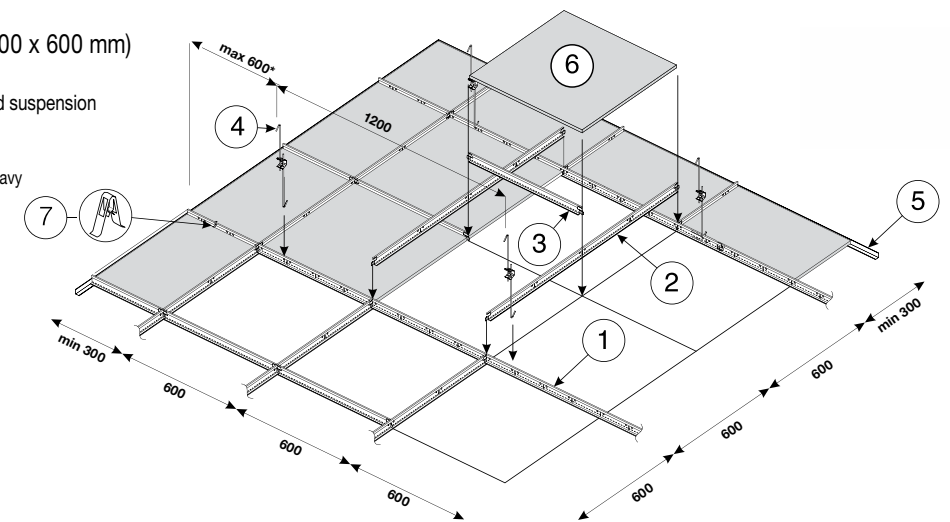

⑥ Tiles	Main Runner centres	Hangers centres	Quantities required per 1m <sup>2</sup> (no waste included)				⑦ Universal retaining clip
			① Main Runner	② Cross Tee 1200 mm	③ Cross Tee 600 mm	④ Hanger	
1200 x 600 mm	1200 mm	1200 mm	0.84 lm	1.67 lm	-	0.70 pcs	5.56 pcs
1.39 pcs	600 mm	1200 mm	1.67 lm	-	0.84 lm	1.40 pcs	
600 x 600 mm	1200 mm	1200 mm	0.84 lm	1.67 lm	0.84 lm	0.70 pcs	
2.78 pcs	600 mm	1200 mm	1.67 lm	-	1.67 lm	1.40 pcs	

⑤ Perimeter trim approx. 0.70 lm/m<sup>2</sup>

The chart is for general guidance only.

## GRID LOAD CAPACITIES

### Prelude 24 - XL<sup>2</sup>

The following table gives the maximum permitted hanger distance (mm) along the Peakform Main Runner for the tile weights and Main Runner spacings noted.

Main Runner centres (mm)	Prelude 24 Main Runner - 31 40 32 A		
	1800	1200	600
Cross Tee(s)	31 34 31 A 31 20 21 A	31 30 51 B 31 20 21 A	31 20 21 A
Configuration (Main Runner horizontal)			
Weight of ceiling tile (kg/m <sup>2</sup> )	Maximum suspension spacing along Main Runner (mm)		
2.5 kg/m <sup>2</sup>	1650	1900	2100
3.0 kg/m <sup>2</sup>	1600	1800	2100
3.5 kg/m <sup>2</sup>	1500	1750	2100
4.0 kg/m <sup>2</sup>	1450	1700	2100
5.0 kg/m <sup>2</sup>	1350	1600	2000
5.5 kg/m <sup>2</sup>	1350	1550	1950
6.0 kg/m <sup>2</sup>	1250	1500	1900
7.0 kg/m <sup>2</sup>	-	1450	1800
8.5 kg/m <sup>2</sup>	-	1300	1700
10.5 kg/m <sup>2</sup>	-	1200	1600
13.0 kg/m <sup>2</sup>	-	1050	1500
14.0 kg/m <sup>2</sup>	-	1000	1450

- Values in the above table conform to Class 1 as defined in EN 13964:2004+A1:2006 table 6. For other classes /deflection limits please contact your local Armstrong Technical Sales team.
- Values are determined from laboratory tests methods in accordance with EN 13964:2004+A1:2006 clause 5.
- Values are applicable for 600 x 600 mm tiles assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span).
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, see the grid loading technical section on pages 102-103.



All products standard in Global White. Other standard colours available for item numbers with index (1) or (2). See details below.  
(1) Colours available: Black (BK), RAL 9006 (SG), Brass (BS), Chrome (CE), White RAL 9010 (WR).  
(2) Also available in RAL 9010 (WR).  
Cross Tee alignment is achieved by locating the tees to the right-hand side of the adjoining section.  
All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# PRELUDE 24 SIXTY<sup>2</sup>

Taller exposed 24mm grid system for longer spanning capability

## Key Attributes

- Double Peakform: patented design for longer spans, stability and easier to cut
- Superlock clip: secure Main Runner connection for better alignment and easier to disconnect
- Compatible with Prelude 24 Sixty<sup>2</sup> XL<sup>2</sup> Cross Tees and Prelude 24TLX & XL<sup>2</sup> Cross Tees
- Rotary stitched: strength and extra stability


## Application area

Circulation areas / Buildings with limited suspension points

## Physical data


- Material: galvanised steel
- Surface finish: baked polyester paint
- Colour: all products standard in Global White

### PRELUDE 24 SIXTY<sup>2</sup> - UNIVERSAL DOUBLE PEAKFORM MAIN RUNNER WITH SUPERLOCK CLIP (bulb-to-bulb connection)

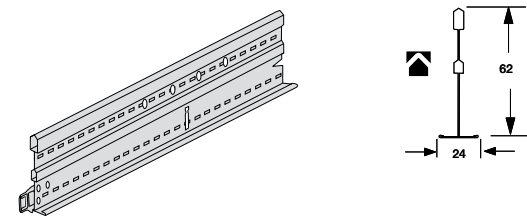


Item Nr.	Dimensions		Content / Carton		Weight / Carton	Cartons / Pallet
	length (mm)	height (mm)	pcs	lm	kg	
40 40 93 G <sup>(1)</sup>	3600	62	12	43.20	21.90	36
40 41 93 G <sup>(1)</sup>	3750	62	12	45.00	22.80	36
40 43 93 G <sup>(1)</sup>	3375	62	12	40.50	20.60	36

### PRELUDE 24 SIXTY<sup>2</sup> - CROSSTEES (stab system, override)

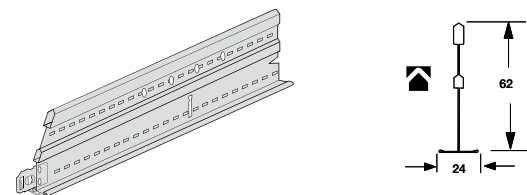


Cross Tees slotted at 300mm						
40 09 93 <sup>(1)</sup>	2400	62	20	48	22.90	20
40 34 93 <sup>(1)</sup>	1800	62	20	36	17.15	20

### PRELUDE 24 - XL<sup>2</sup> CROSSTEES (stab system, override)

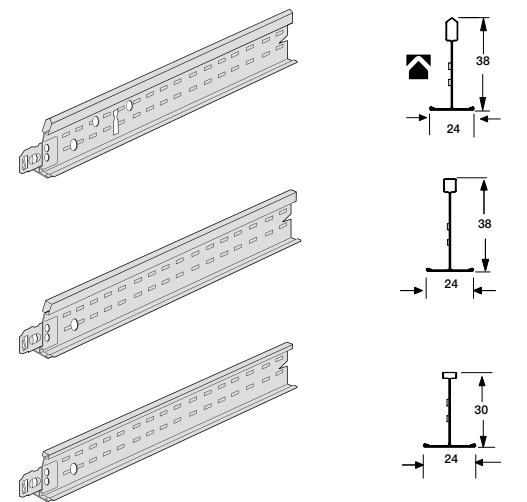

Cross Tees slotted						
31 33 31	1350	38	60	81.00	17.20	20
31 31 51 B <sup>(1)</sup>	1250	38	60	75.00	18.90	72
31 30 51 B <sup>(1)</sup>	1200	38	60	72.00	18.20	72
31 32 31 <sup>(2)</sup>	1000	38	60	60.00	15.10	42
31 34 31 A	1800	38	30	54.00	17.00	20
Cross Tees unslotted						
31 16 32	750	38	60	45.00	14.70	72
31 25 32	312.5	38	60	18.75	4.60	144
31 24 32	300	38	60	18.00	4.60	144
31 23 21	675	30	60	40.50	7.70	144
31 21 23 A <sup>(1)</sup>	625	30	60	37.50	8.60	144
31 20 21 A <sup>(1)</sup>	600	30	60	36.00	8.20	144
31 22 21 <sup>(2)</sup>	500	30	60	30.00	6.80	84

## ACCESSORIES



Item Nr.	Description	Dimensions length (mm)	height (mm)	Content / Carton pcs	Weight / Carton kg
A 401 G	Top Connector Clip accessory for Prelude Sixty <sup>2</sup> (Included in the carton)	-	-	-	-
A WDN 23 G	Double bent tee bar hanger	57	36	100	2.30

## SECTION DRAWINGS

### Prelude 24 Sixty<sup>2</sup> - Universal Double Peakform Main Runners

Length			
3750	156.25	11 x 312.5	156.25
3600	150	11 x 300	150
3375	168.75	9 x 337.5	168.75

### Prelude 24 Sixty<sup>2</sup> - Cross Tees

Length			
2400	300	6 x 300	300
1800	300	4 x 300	300

### Prelude 24 - XL<sup>2</sup> Cross Tees


Length			
1800	300	4 x 300	300
1350	337.5	2 x 337.5	337.5
1250	312.5	2 x 312.5	312.5
1200	300	2 x 300	300
1000	250	2 x 250	250

### Prelude 24 - XL<sup>2</sup> Cross Tees

Length			
750 / 675 / 625 / 600 / 500 / 312.50 / 300			

### SYSTEM DRAWING (module 2400 x 600 mm)

- ① Main Runner
- ② Cross Tee 2400 mm
- ③ Cross Tee 600 mm
- ④ Hanger
- ⑤ Perimeter Trim
- ⑥ Tile
- ⑦ Top Connector Clip (TCC)

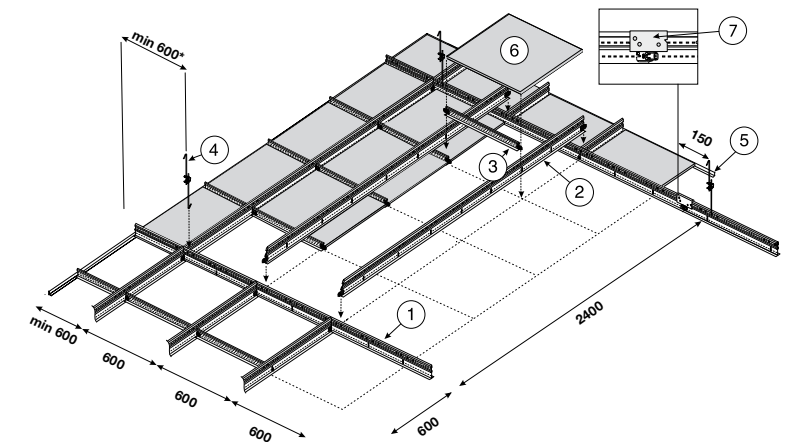

⑥ Tiles	Main Runner centres	Quantities required per 1m <sup>2</sup> (no waste included)				
		① Main Runner	② Cross Tee 2400 mm	② Cross Tee 1800 mm	② Cross Tee 1200 mm	③ Cross Tee 600 mm
600 x 600 mm	2400 mm	0.42 lm	1.67 lm	-	-	1.25 lm
	1800 mm	0.56 lm	-	1.67 lm	-	1.11 lm
	1200 mm	0.84 lm	-	-	1.67 lm	1.84 lm
	600 mm	1.67 lm	-	-	-	1.67 lm

⑤ Perimeter trim approx. 0.70 lm/m<sup>2</sup>

The chart is for general guidance only.

All products standard in Global White. Other standard colours available for item numbers with index (1), (2) or (3). See details below.

(1) Also available in RAL 9010 (WR), RAL 9006 (SG) and Black (BK).

(2) Colours available: Black (BK), RAL 9006 (SG), Brass (BS), Chrome (CE), White RAL 9010 (WR).

(3) Also available in RAL 9010 (WR).

All measurements in millimetres. All sizes are nominal.

# PRELUDE 24 SIXTY<sup>2</sup>

## ● GRID LOAD CAPACITIES

### Prelude 24 Sixty<sup>2</sup> System


The following table gives the maximum permitted hanger distance (mm) along the double Peakform Main Runner (40 40 93 G) for the tile weights and Main Runner spacings noted.

Prelude 24 XL <sup>2</sup> - Cross Tees				Prelude 24 Sixty <sup>2</sup> - Cross Tees			
Main Runner centres (mm)	1800	1200	600	2400	2400	1800	1800
Cross Tee(s)	31 34 31 A 31 20 21 A	31 30 51 B 31 20 21 A	31 20 21 A	40 09 93 31 20 21 A	40 09 93 31 30 51 B 31 20 21 A	40 34 93 31 20 21 A	40 34 93 31 30 51 B 31 20 21 A
Configuration (Main Runner horizontal)							
Weight of ceiling tile (kg/m <sup>2</sup> )	Maximum suspension spacing along Main Runner (mm)						
2.5 kg/m <sup>2</sup>	2250	2400	2400	2100	2150	2250	2300
3.0 kg/m <sup>2</sup>	2200	2400	2400	2050	2050	2200	2200
3.5 kg/m <sup>2</sup>	2150	2350	2400	2000	2000	2150	2150
4.0 kg/m <sup>2</sup>	2050	2300	2400	1900	-	2050	2100
5.0 kg/m <sup>2</sup>	2000	2200	2400	1750	-	2000	2000
5.5 kg/m <sup>2</sup>	1900	2150	2400	1650	-	1900	1900
6.0 kg/m <sup>2</sup>	1850	2100	2400	1600	-	1850	1850
7.0 kg/m <sup>2</sup>	-	2050	2400	1500	-	1700	1700
7.5 kg/m <sup>2</sup>	-	2000	2350	1400	-	1650	1650
8.5 kg/m <sup>2</sup>	-	1900	2300	-	-	1550	1550
9.5 kg/m <sup>2</sup>	-	1800	2250	-	-	1450	1450
10.5 kg/m <sup>2</sup>	-	1700	2200	-	-	1400	-
13.0 kg/m <sup>2</sup>	-	1550	2100	-	-	1250	-

- Values in the above table conform to Class 1 as defined in EN 13964:2004+A1:2006 table 6. For other classes /deflection limits please contact your local Armstrong Technical Sales team.
- Values are determined from laboratory tests methods in accordance with EN 13964:2004+A1:2006 clause 5.
- Values are applicable for 600 x 600 mm tiles assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span).
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, see the grid loading technical section on pages 102-103.



All products standard in Global White. Other standard colours available for item numbers with index (1), (2) or (3). See details below.  
(1) Also available in RAL 9010 (WR), RAL 9006 (SG) and Black (BK).  
(2) Colours available: Black (BK), RAL 9006 (SG), Brass (BS), Chrome (CE), White RAL 9010 (WR).  
(3) Also available in RAL 9010 (WR).  
All measurements in millimetres. All sizes are nominal.



Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# PRELUDE 24 SIXTY<sup>2</sup> CORRIDOR

## Taller exposed 24mm grid system for corridor installations

### Key Attributes

- Double Peakform: patented design for longer spans, stability and easier to cut
- Double bent tee bar hanger for stability / improved loadbearing performance
- Compatible with Prelude 24 TLX & XL<sup>2</sup> Cross Tees for tile installations
- Rotary stitched: strength and extra stability


## Application area

Circulation areas

### Physical data

- Material: galvanised steel
- Surface finish: baked polyester paint
- Colour: all products standard in Global White

## ● PRELUDE 24 SIXTY<sup>2</sup> BUTT CUT

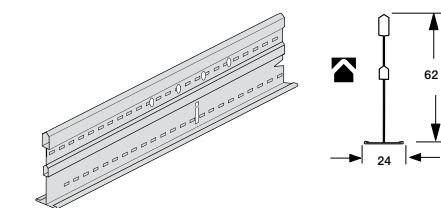

The Prelude 24 Sixty<sup>2</sup> butt cut system is designed for use in corridor applications, with or without Cross Tees, and where spans do not exceed 3750 mm.

For a wider configuration, the Main Runner is compatible with the Prelude 24 TLX and XL<sup>2</sup> Cross Tees.

**Special length and modulation made to order**, with and without slots, please contact your local Armstrong Technical Sales team.

### PRELUDE 24 SIXTY<sup>2</sup> butt cut

Length	min. 600 - max. 3750	min. 150	min. 300 x number of required slots	min. 150
--------	----------------------	----------	-------------------------------------	----------

Double Peakform Main runner section requiring less suspension points and compatible with Prelude 24 XL<sup>2</sup> and TLX Cross tees

## ● ACCESSORIES




Item Nr.	Description	Dimensions length (mm)	height (mm)	Content / Carton pcs	Weight / Carton kg
A WDN 23 G	Double bent tee bar hanger	57	36	100	2.30

## ● GRID LOAD CAPACITIES

	Span in mm - Load capacities in kg/m <sup>2</sup>															
	Spacing (mm)	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000
Prelude 24 Sixty <sup>2</sup> Butt cut	300	37.2	32.8	29.1	25.9	23.2	20.9	18.9	17.2	15.6	14.3	13.1	11.8	10.00	8.5	7.1
	600	18.6	16.4	14.5	13.1	11.6	10.5	9.5	8.6	7.8	7.1	6.5	5.9	5.0	4.2	3.5
	1200	9.3	8.2	7.3	6.5	5.8	5.2	4.7	4.3	3.9	3.5	3.2	-	-	-	-

- Values in the above table conform to Class 1 as defined in EN 13964:2004+A1:2006 table 6. For other classes /deflection limits please contact your local Armstrong Technical Sales team.
- Values are determined from laboratory tests methods in accordance with EN 13964:2004+A1:2006 clause 5.
- Values are applicable for 600 x 600 mm tiles assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span).
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, see the grid loading technical section on pages 102-103.

## ● SYSTEM DRAWING

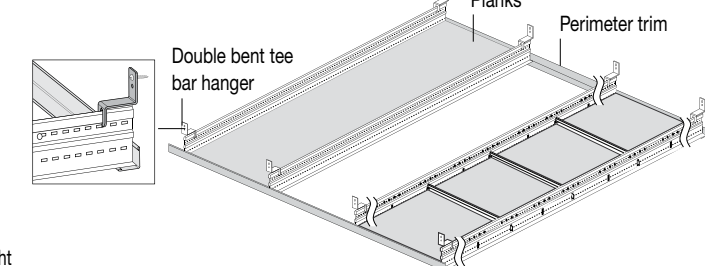

All products standard in Global White.  
All measurements in millimetres. All sizes are nominal.



Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# PRELUDE 35 & PRELUDE 35 SIXTY<sup>2</sup> - XL<sup>2</sup>

## Exposed 35mm grid systems

### Key Attributes

- Peakform / Double Peakform: patented design for strength / longer spans, stability and easier to cut
- Superlock clip: secure Main Runner connection for better alignment and easier to disconnect
- Double bent tee bar hanger for stability / improved loadbearing performance in corridors
- Rotary stitched: strength and extra stability



### Application area

Retail outlets / Industrial manufacturing / Circulation areas

### Physical data



- Material: galvanised steel
- Surface finish: baked polyester paint / galvanised
- Colour: available in Global White or Black / n/a

#### PRELUDE 35 - PEAKFORM MAIN RUNNER & SUPERLOCK CLIP (bulb-to-bulb connection)





Item Nr.	Dimensions length (mm)	height (mm)	Content / Carton pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
24 40 42 <sup>(1)</sup>	3600	43	16	57.60	22.20	20

#### PRELUDE 35 SIXTY<sup>2</sup> - DOUBLE PEAKFORM MAIN RUNNER & SUPERLOCK CLIP (bulb-to-bulb connection)




24 48 93 <sup>(1)</sup>	3500	62	12	42.00	22.50	20
24 40 93 <sup>(1)</sup>	3600	62	12	43.20	23.00	20

#### PRELUDE 35 - XL<sup>2</sup> PEAKFORM CROSSTEES (stab system, override)



24 06 42 <sup>(1)</sup>	1990	43	16	31.80	12.30	20
24 34 42 <sup>(1)</sup>	1800	43	16	31.80	12.30	20
24 36 42 <sup>(1)</sup>	1500	43	32	48.00	16.60	20
24 30 42 <sup>(1)</sup>	1200	43	36	43.20	14.90	60
24 20 42 <sup>(1)</sup>	600	43	36	21.60	7.50	120


## ACCESSORIES




Item Nr.	Description	Dimensions length (mm)	height (mm)	Content / Carton pcs	Weight / Carton kg
A 401 G	Top Connector Clip accessory for Prelude Sixty <sup>2</sup> (Included in the carton)	-	-	-	-
A WDN 23 G	Double bent tee bar hanger	57	36	100	2.30

## SECTION DRAWINGS



### Prelude 35 - Peakform Main Runner

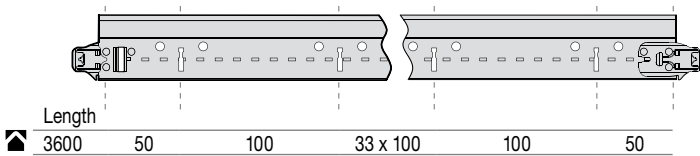

### Prelude 35 - XL<sup>2</sup> Cross Tees

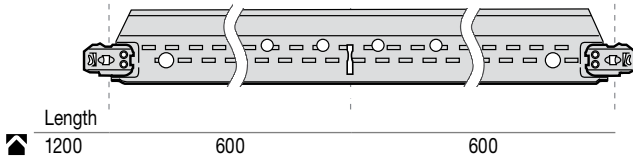

### Prelude 35 Sixty<sup>2</sup> - Double Peakform Main Runners

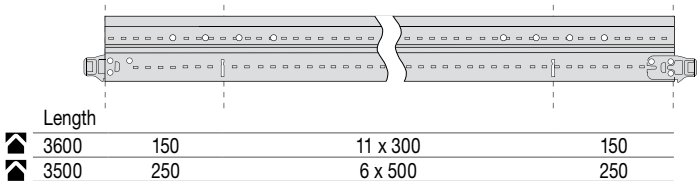

## GRID LOAD CAPACITIES

### Prelude 35 & Prelude 35 Sixty<sup>2</sup> System

The following table gives the maximum permitted hanger distance (mm) along the Main Runners for the tile weights and Main Runner spacings noted.

Prelude 35 Main Runner - 24 40 42					Prelude 35 Sixty <sup>2</sup> Main runner - 24 40 93			
Main Runner centres (mm)	1990	1500	1200	600	1990	1500	1200	600
Cross Tee(s)	24 06 42	24 36 42	24 30 42 24 20 42	24 20 42	24 06 42	24 36 42	24 30 42 24 20 42	24 20 42
Configuration (Main Runner horizontal)								
Weight of ceiling tile (kg/m <sup>2</sup> )	Maximum suspension spacing along Main Runner (mm)							
2.5	1700	1900	1900	2000	2400	2400	2400	2400
3.0	1600	1800	1850	2000	2200	2400	2400	2400
3.5	1550	1700	1750	2000	2050	2350	2400	2400
4.0	-	1650	1700	2000	-	2200	2400	2400
4.5	-	1600	1650	2000	-	2100	2300	2400
5.0	-	1550	1600	2000	-	2000	2200	2400
5.5	-	1500	1550	1950	-	1900	2100	2400
6.0	-	1400	1500	1900	-	1800	2000	2400
6.5	-	1350	1500	1900	-	1750	1950	2400
7.0	-	1300	1450	1850	-	1700	1900	2400
8.0	-	1250	1400	1750	-	1600	1750	2400
9.0	-	-	1300	1700	-	-	1650	2300
10.0	-	-	1250	1650	-	-	1600	2200
12.0	-	-	1150	1550	-	-	1450	2000
14.0	-	-	1050	1450	-	-	1350	1900

- Values in the above table conform to Class 1 as defined in EN 13964:2004+A1:2006 table 6. For other classes /deflection limits please contact us.
- Values are determined from laboratory tests methods in accordance with EN 13964:2004+A1:2006 clause 5.
- Values are applicable for 600 x 600 mm tiles assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span), taking in consideration the bending moment.
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, please contact us.
- The above loading figures are calculated and based upon the use of the bent and quick suspension hangers family range.



All standard products in Global White.  
(1) Also available in Black (BK) and Galvanised (UP). Cross Tee alignment is achieved by locating the tees to the right-hand side of the adjoining section. All dimensions in millimetres. All sizes are nominal. Straight cut bar length Prelude 35 Sixty<sup>2</sup> are available on special request.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# BANDRASTER

Exposed grid system available in a range of different widths for tile or plank installations

## Key Attributes

- Unslotted Bandraster for mineral plank installation or Metal B-L 302 system
- Slotted Bandraster for tile installation using standard Prelude 24 Cross Tees (or custom Prelude 15 TL Cross Tees)
- Special slot spacing possible (minimum 50mm spacing)
- Tartan layouts easily constructed using cross connectors


## Application area

Open plan office / Individual offices

## Physical data


- Material: galvanised steel
- Surface finish: baked polyester paint
- Standard colours: Global White & RAL 9010
- Other colours available upon request

## BANDRASTER SYSTEMS

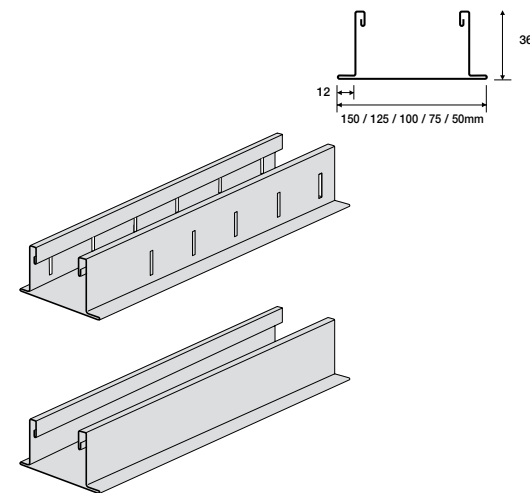

Item Nr.	Dimensions length (mm)	width (mm)	Content / pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
<b>Slotted at 312.50 mm <sup>(1)</sup></b>						
36 2100 B	3750	100	8	30.00	32.60	16
<b>Slotted at 100 mm <sup>(1)</sup></b>						
36 3050	3600	50	8	28.80	24.00	28
36 3075	3600	75	8	28.80	27.70	20
36 3100*	3600	100	8	28.80	31.40	16
36 3125	3600	125	8	28.80	38.30	12
36 3150	3600	150	4	14.40	21.20	20
<b>Unslotted <sup>(2)</sup></b>						
36 0050 A	3600	50	8	28.80	24.00	28
36 0075 A	3600	75	8	28.80	27.70	20
36 0100 A*	3600	100	8	28.80	31.40	16
36 0125 A	3600	125	8	28.80	38.30	12
36 0150	3600	150	4	14.40	21.20	20
M215540**	3600	100	8	28.80	31.40	16

## ACCESSORIES




Item Nr.	Description	Dimensions width (mm)	Content / Carton pcs	Weight / Carton kg
A 36 0501	Strip / rod connector	50	50	1.20
A 36 0751	"	75	50	1.50
A 36 1001	"	100	50	1.80
A 36 0502 G	Nonius hanger	50	100	5.80
A 36 0752 G	"	75	100	8.10
A 36 1002 G	"	100	100	11.00
A 36 1252 G	"	125	100	12.50
A 36 1502 G	"	150	100	15.00
A 36 0503 G	Splice	50	100	8.00
A 36 0753 G	"	75	100	8.30
A 36 1003 G	"	100	100	14.00
A 36 1253 G	"	125	100	17.00
A 36 1503 G	"	150	100	19.50
A 36 0504 G	Cross connector	50	100	5.80
A 36 0754 G	"	75	100	8.10
A 36 1004 G	"	100	100	11.00
A 36 1254 G	"	125	100	12.50
A 36 1504 G	"	150	50	7.50
A 36 0505 G	Wall connector	50	100	5.80
A 36 0755 G	"	75	100	8.10
A 36 1005 G	"	100	100	11.00
A 36 1255 G	"	125	100	12.50
A 36 1505 G	"	150	50	7.50
M311549D	Hanger for Bandraster 100 mm	86 x 74 x 24	100	6.6
M300120	Plug-in clip	20 x 21 x 6	100	0.2

## SYSTEM DRAWING


Pin to connect bottom and upper part of Nonius A 10229 G  
(It is recommended to use 2 pins to connect bottom & upper part of Nonius)

- Values in the table conform to Class 1 as defined in EN 13964:2004+A1:2006 table 6.  
For other classes /deflection limits please contact us.
- Values are determined from laboratory tests methods in accordance with EN 13964:2004+A1:2006 clause 5.
- Values are applicable for the 7 planks systems described assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span), taking in consideration the bending moment.
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, please contact us.

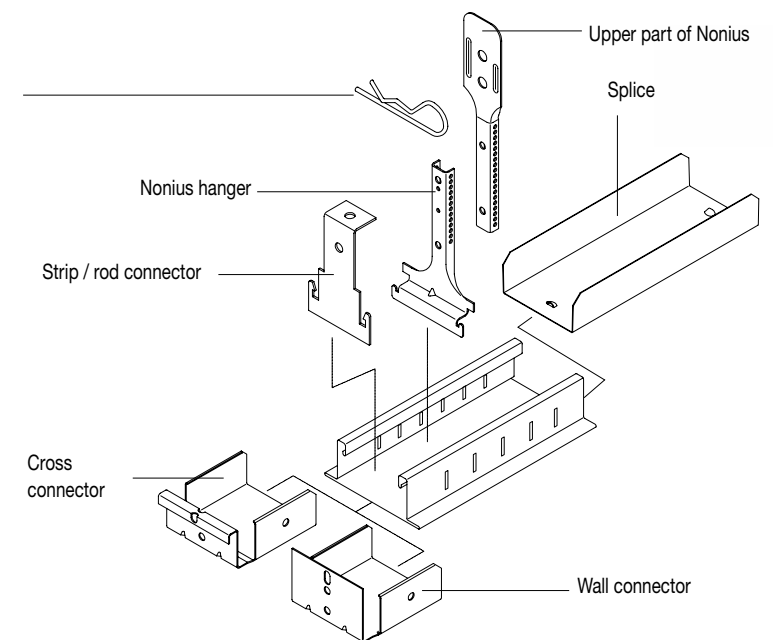

d to different criteria +A1:2006, please	Prelude 24					Z-Bar		
	Centres (mm)	1800	1724	1500	1200	2500	1800	1500
	Cross Tee(s)	13 34 32	13 50 32	13 36 32	13 30 31	CZ 41 795 J	CZ 41 794 J	CZ 41 494 J
	Spacing (mm)	300	300	600	600	300	300	300
Bandraster	1000	16.2	18.6	13.4	15.2	10.2	15.4	22.7
50 to 150 mm	1200	12.9	13.5	13.4	15.2	9.3	12.9	15.5
Suspension Spacing	1500	7.5	7.9	9.7	12.1	4.6	7.4	9.2

## SYSTEM DRAWING WITH U-PROFILE SYSTEM FOR METAL CEILING

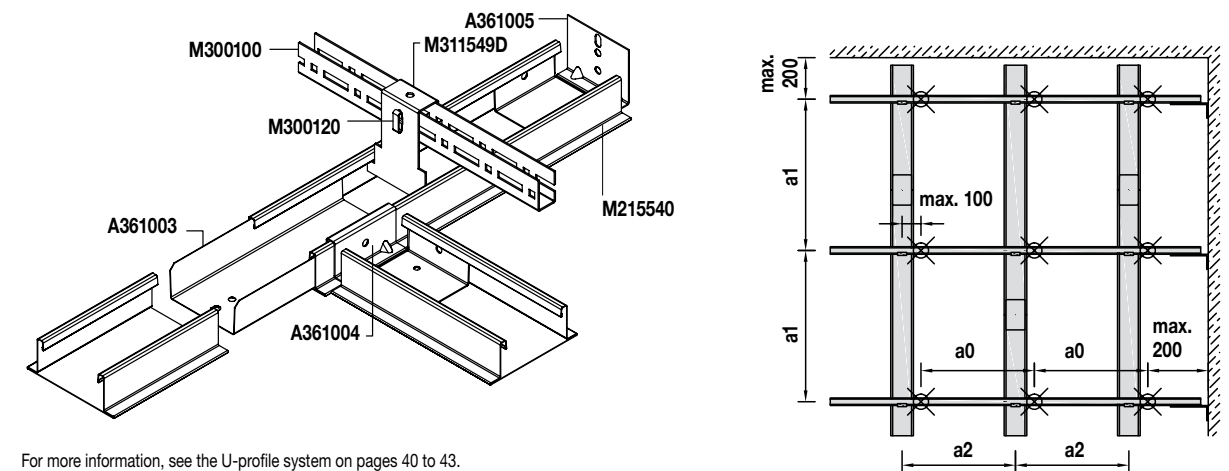

For more information, see the U-profile system on pages 40 to 43.

## SPACING PARAMETERS

a2 [mm]	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2700	2800	2900	3000	3100	3200	3300
a0 [mm]	1800	1300	1400	1500	1600	1700	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	975	1000	1025	1050	1075	1100	1125	1150	1175	1200	1225	1250	1300	1350	1400	1450	1500	1550	1600	1650	
a1 [mm]	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1850	1850	1800	1800	1750	1750	1700	1700	1650	1650	1650	1600	1600	1600	1600	1550	1550	1550	1550	1500	1500	1500	1500	1450	1450	1450	1400	1400	1350	1300	1250	1200	1150	1100	1050	1050		
a1* [mm]	1900	1900	1900	1900	1850	1800	1750	1750	1700	1700	1650	1650	1600	1600	1550	1550	1500	1500	1450	1450	1400	1350	1350	1300	1250	1250	1200	1150	1100	1100	1050	1050	1000	1000	950	950	900	900	850	850	800	800	750	750	700			

\* System with additional load + 4 kg/m<sup>2</sup>



Product available as standard in Global White.  
\*Also available in RAL 9010 (WR). \*\*Post painted in RAL 9010 as standard. Other colours available upon request.  
(1) Is compatible with all plank edge details whether Cross Tees are required or not.  
(2) Is compatible only with plank edge details when no visible Cross Tees span between Bandraster sections.  
All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location.  
Please contact Armstrong Technical Sales for further details.



# SYSTEM Z PRELUDE 24 / BANDRASTER / CORRIDOR

## Components for concealed / semi-concealed plank systems

### Key Attributes

- Z-Bar or Prelude 24 Butt Cut for a monolithic visual in corridor installations
- Installed with Prelude 24 or Bandraster for semi-concealed appearance in room installations
- Accessible system with SL2 planks



### Application area

Retail outlets / Industrial manufacturing / Circulation areas

### Physical data



- Material: galvanised steel
- Surface finish: galvanised / Baked polyester paint
- Colour: n/a (Z-Bar) / Global White (Prelude 24 Butt Cut)

## SEMI-CONCEALED




Item Nr.	Description	Dimensions length (mm)	Content pcs	Carton lm	Weight / Carton kg
CZ 41 494 J	Z-Bar 30.5 mm	1500	20	30.00	10.20
CZ 41 794 J	Z-Bar 30.5 mm	1800	20	36.00	12.30
CZ 41 795 J	Z-Bar 66.5 mm	2500	10	25.00	12.10

Z-Bars special lengths available : Z-Bar 30,5 mm from 500 mm up to 1800 mm and Z-Bar 66,5 mm from 1801 mm to 2500 mm.



CB 31 36 32	Prelude 24 Butt Cut	1500	38	45.00	14.50
CB 31 34 32	Prelude 24 Butt Cut	1800	38	54.00	16.90

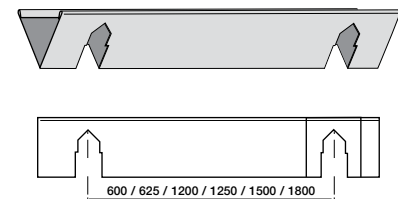

C 180 L 600	Spacer Bar	600	50	30.00	5.40
C 180 L 625	"	625	50	31.25	5.60
C 180 L 1200	"	1200	50	60.00	10.60
C 180 L 1250	"	1250	50	61.25	11.00
C 180 L 1500	"	1500	50	75.00	13.20
C 180 L 1800	"	1800	50	90.00	9.50

Spacer bar lengths for different distances between main runners or Bandrasters are available on request. with min. 300 mm - max 2500 mm length.

## GRID LOAD CAPACITIES

The following table gives the maximum permitted load capacity of the tile weights in kg/m² along the different profiles for the spacings noted.


Item Nr.	Length	≤ 300mm	Spacing ≤ 450mm	≤ 600mm
Z-Bars				
CZ 41 494 J	1500 mm	16.1	10.7	8.1
CZ 41 794 J	1800 mm	10.8	7.2	5.4
CZ 41 795 J	2500 mm	14.0	9.3	7.0
Prelude 24 Butt Cut				
CB 31 36 32	1500 mm	26.9	17.9	13.4
CB 31 34 32	1800 mm	13.2	10.8	8.1

- 1) No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc are permitted.
- 2) No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustics, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.

## SYSTEM DRAWING


Semi-concealed SL2  
Corridor installation

- ① Z-Bar\*
- ② Perimeter trim
- ③ Plank

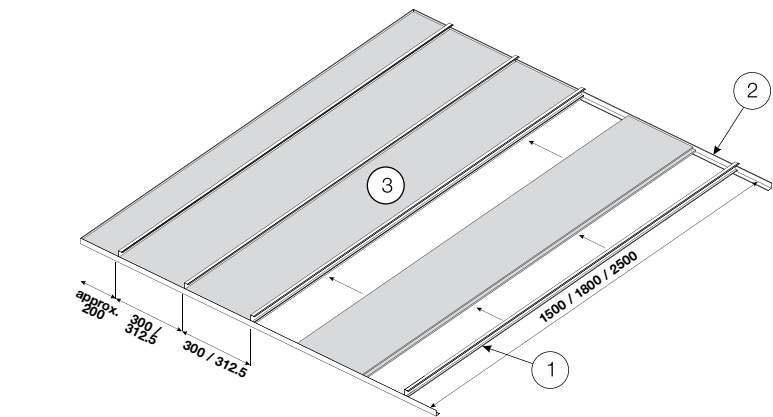


Semi-concealed SL2  
(Room installation)

- ① Main Runner
- ② Z-Bar\*
- ③ Spacer Bar
- ④ Hanger
- ⑤ Perimeter trim
- ⑥ Plank

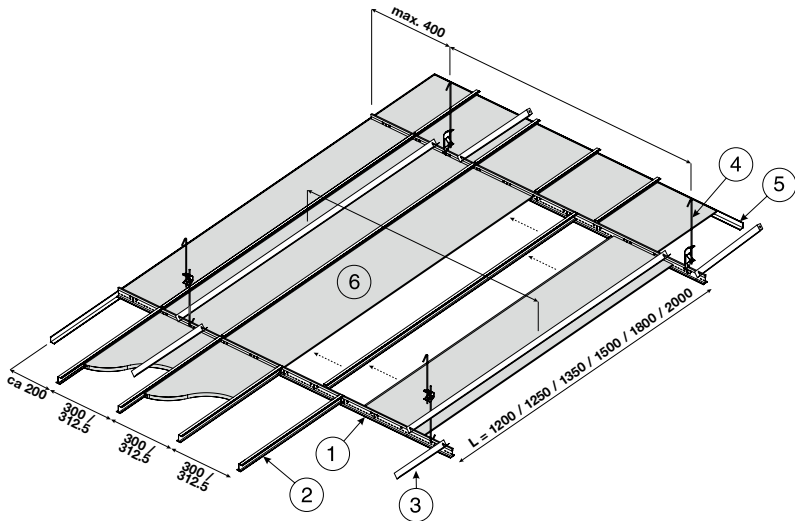

Semi-Concealed SL2/K2C2  
Bandraster room installation

- ① Bandraster (slotted)
- ② Splice
- ③ Z-bar\*
- ④ Nonius hanger
- ⑤ Perimeter trim
- ⑥ Wall connector
- ⑦ Plank

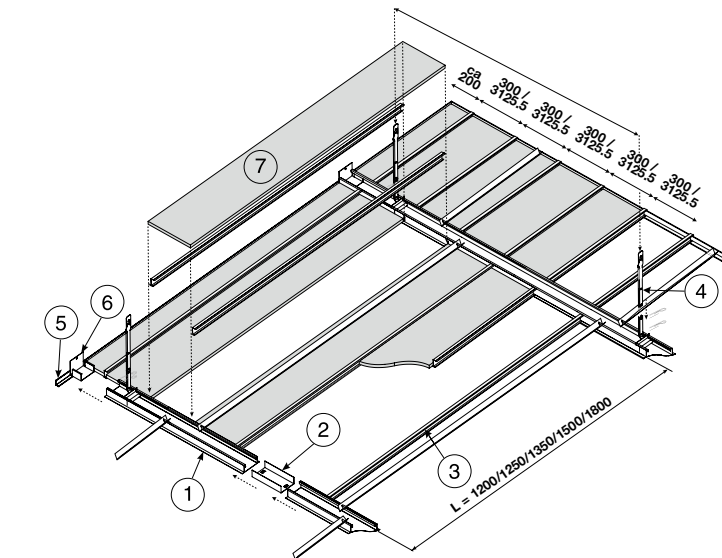

\*The Prelude 24 Butt Cut can be used as an alternative to the Z-Bar.  
All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# SILHOUETTE - XL<sup>2</sup>

## Exposed 15mm grid system with channel feature and pre-mitred intersections

### Key Attributes

- 6mm reveal for a more monolithic appearance with MicroLook 90 and MicroLook BE mineral tiles or Wood MicroLook tiles
- 3mm reveal for a more monolithic appearance with Metal MicroLook 8 tiles
- Peakform: patented design for strength, stability and easier to cut
- Rotary stitched: strength and extra stability


### Application area

Reception areas / Open plan office / Individual offices

### Physical data


- Material: galvanised steel
- Surface finish: baked polyester paint
- Colour: available in Global White, Black, Global White with black reveal and RAL 9010

### SILHOUETTE 6 MM - MAIN RUNNER (by-pass connection)

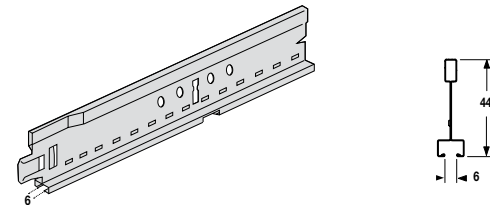


Item Nr.	Dimensions length (mm)	height (mm)	Content pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
<b>with 6 mm reveal</b>						
80 40 42 G <sup>(1)</sup>	3600	44	20	72.00	24.50	36
80 39 43 G <sup>(1)</sup>	3125	44	20	62.50	25.40	25
80 44 42 G <sup>(1)</sup>	2700	44	20	54.00	18.40	30

### SILHOUETTE 3 MM - MAIN RUNNER (by-pass connection)

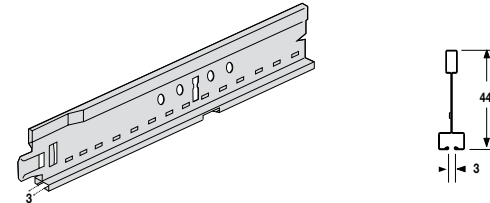


<b>with 3 mm reveal</b>						
81 40 42 WRG <sup>(2)</sup>	3600	44	20	72.00	24.50	36

### SILHOUETTE 6 MM - XL<sup>2</sup> PEAKFORM CROSSTEES (stab system)

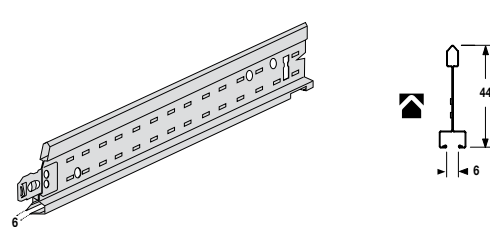

<b>with 6 mm reveal</b>						
80 30 42 G <sup>(1)</sup>	1200	44	60	72.00	24.50	35
80 31 43 G <sup>(1)</sup>	1250	44	60	75.00	23.80	35
80 33 42 G <sup>(1)</sup>	1350	44	30	40.50	13.80	50
80 32 42 G <sup>(1)</sup>	1000	44	60	60.00	20.40	24
80 20 42 G <sup>(1)</sup>	600	44	60	36.00	12.70	70
80 21 43 G <sup>(1)</sup>	625	44	30	37.50	16.00	70
80 23 42 G <sup>(1)</sup>	675	44	60	40.50	14.30	70
80 22 42 G <sup>(1)</sup>	500	44	60	30.00	10.60	70
80 24 42 G <sup>(1)</sup>	300	44	120	36.00	34.00	70

### SILHOUETTE 3 MM - XL<sup>2</sup> PEAKFORM CROSSTEES (stab system)

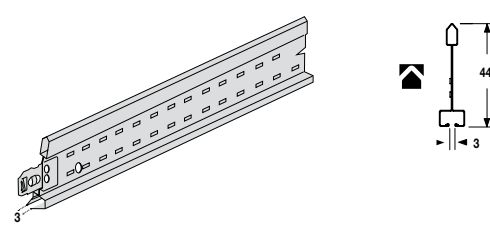

<b>with 3 mm reveal</b>						
81 30 42 WRG <sup>(2)</sup>	1200	44	60	72.00	24.50	35
81 20 42 WRG <sup>(2)</sup>	600	44	60	36.00	12.70	70

### SECTION DRAWINGS

#### Silhouette 6 mm & 3 mm - Main Runners


Length	3600	3500	3125	2700	600	500	3 x 600	600	300

#### Silhouette 6 mm & 3 mm - XL<sup>2</sup> Cross Tees


Length	1350	1250	1200	1000	675	625	600	500	300

### SILHOUETTE XL<sup>2</sup>

- Pre-mitred intersections
- Choice of either 6 or 3 mm reveal dimension
- Silhouette 15 XL<sup>2</sup> with 3 mm reveal is supplied as standard in RAL 9010 white to compliment Armstrong metal tiles






View of mitred intersection from beneath

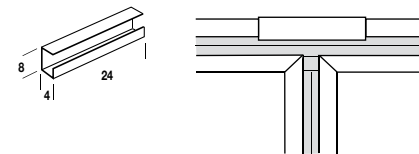

**MCC4 G**  
Mitre closure clip for 6 mm reveal

### Perimeter Solutions

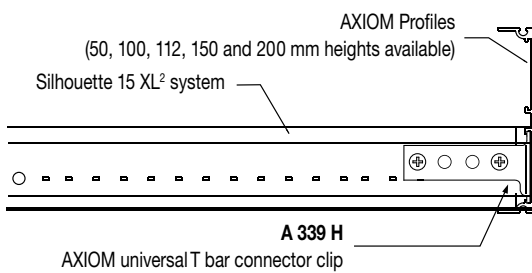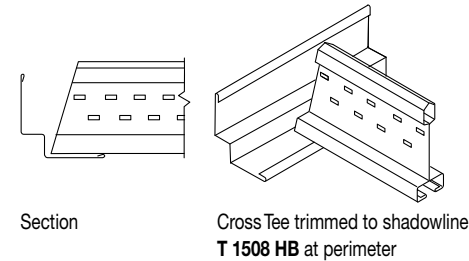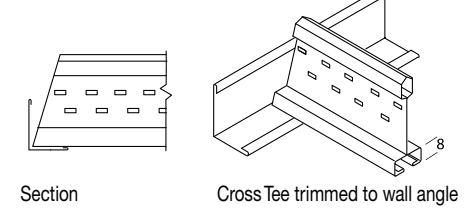

### GRID LOAD CAPACITY

#### SILHOUETTE XL<sup>2</sup> System

The following table gives the maximum permitted hanger distance (mm) along the Silhouette Main Runner (80 40 42 G) for the tile weights and Main Runner spacings noted.

- Values in the above table conform to Class 1 as defined in EN 13964:2004+A1:2006 table 6. For other classes /deflection limits please contact your local Armstrong Technical Sales team.
- Values are applicable for 600 x 600 mm tiles assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span).
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, see the grid loading technical section on pages 102-103.

Silhouette 6mm Main runner - 80 40 42 G		
Main Runner centres (mm)	1200	600
Cross Tee(s)	80 30 42 G 80 20 42 G	80 20 42 G
Configuration (Main Runner horizontal)		
Weight of ceiling tile (kg/m²)	Maximum suspension spacing along Main Runner (mm)	
2.5 kg/m²	1800	2100
3.0 kg/m²	1700	2100
3.5 kg/m²	1650	2050
4.0 kg/m²	1600	2000
5.0 kg/m²	1500	1900
5.5 kg/m²	1450	1850
6.0 kg/m²	1400	1800
7.0 kg/m²	1300	1700
8.5 kg/m²	1200	1600
10.5 kg/m²	1100	1550
13.0 kg/m²	950	1350



All products standard in Global White unless indicated by index (2). Other standard colours available for item numbers with index (1). See details below.

(1) Silhouette with 6 mm reveal is available in white, black (BK) or white with black reveal (BI).

(2) WR = White RAL 9010 (WR)

All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# INTERLUDE HRC - XL<sup>2</sup>

## Exposed 15mm grid system with double reveal feature

### Key Attributes

- Unmitred intersections for flexibility of Cross Tee positioning to create staggered layouts
- Double reveal feature perfect for installation with MicroLook 90 mineral tiles
- Rotary stitched: strength and extra stability


### Application area

Reception areas / Open plan office / Individual offices

### Physical data


- Material: galvanised steel
- Surface finish: baked polyester paint
- Colour: Global White

## ● INTERLUDE HRC - MAIN RUNNER (by-pass connection)

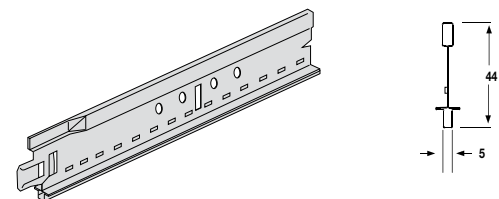

Item Nr.	Dimensions length (mm)	height (mm)	Content pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
TZ 61 40 42	3600	44	20	72.00	23.60	36

## ● INTERLUDE HRC - XL<sup>2</sup> CROSSTEES (stab system)

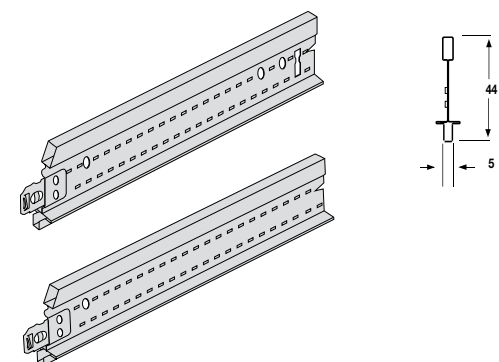


Cross Tees slotted						
61 30 42 G	1200	44	60	72.00	30.30	42



Cross Tees unslotted						
61 20 42 G	600	44	60	36.00	15.00	84
TZ 61 24 42	300	44	120	36.00	15.00	84

## ● SECTION DRAWINGS

### INTERLUDE HRC - Main Runner

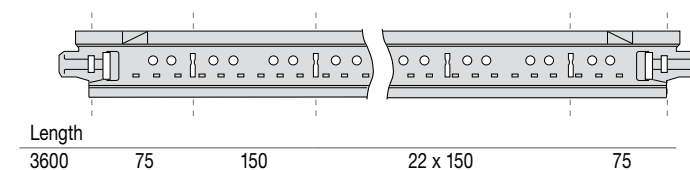


### INTERLUDE HRC - XL<sup>2</sup> Cross Tees

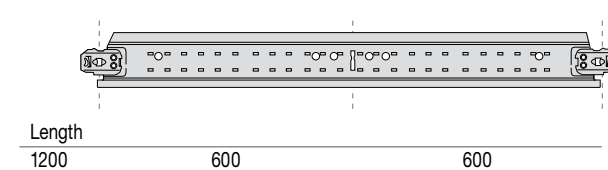


## ● INTERLUDE HRC - XL<sup>2</sup>

- The stepped flange profile provides a unique double reveal visual
- Unmitred intersections allow for Cross Tee installation at any Main Runner slot position


INTERLUDE HRC - XL<sup>2</sup> can be easily field cut with snips in 3 simple steps:

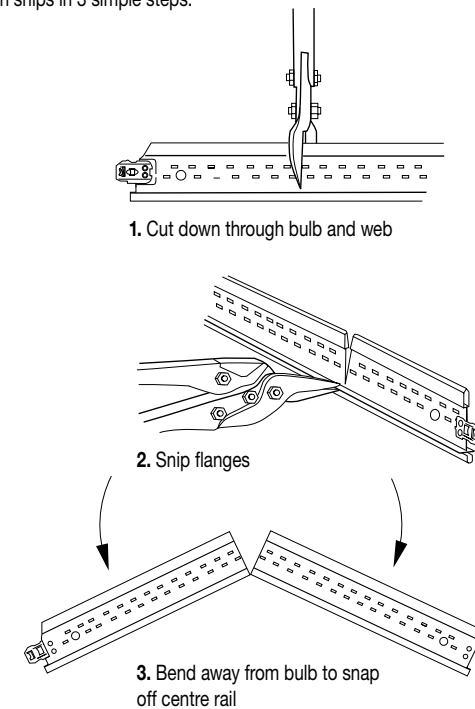

### Perimeter Solutions

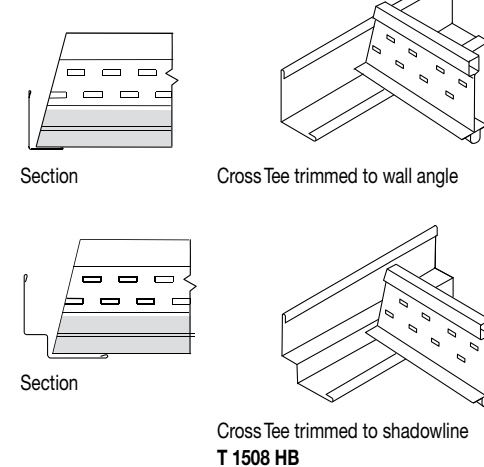

### Partition Head Fixing

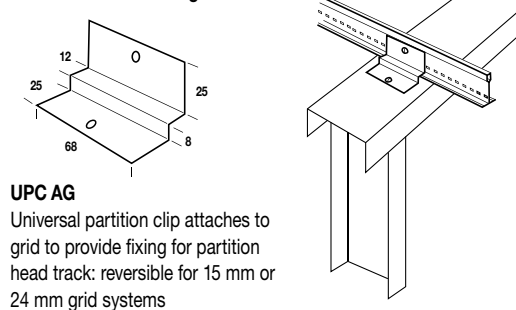

## ● GRID LOAD CAPACITY

### INTERLUDE HRC - XL<sup>2</sup> System

The following table gives the maximum permitted hanger distance (mm) along the Interlude Main Runner (TZ 61 40 42) for the tile weights and Main Runner spacings noted.

- Values in the above table conform to Class 1 as defined in EN 13964:2004+A1:2006 table 6. For other classes /deflection limits please contact your local Armstrong Technical Sales team.
- Values are determined from laboratory tests methods in accordance with EN 13964:2004+A1:2006 clause 5.
- Values are applicable for 600 x 600 mm tiles assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span).
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, see the grid loading technical section on pages 102-103.

Interlude Main Runner - TZ 61 40 42		
Main Runner centres (mm)	1200	600
Cross Tee(s)	61 30 42 G 61 20 42 G	61 20 42 G
Configuration (Main Runner horizontal)		
Weight of ceiling tile (kg/m <sup>2</sup> )	Maximum suspension spacing along Main Runner (mm)	
2.5 kg/m <sup>2</sup>	1950	2100
3.0 kg/m <sup>2</sup>	1850	2100
3.5 kg/m <sup>2</sup>	1750	2100
4.0 kg/m <sup>2</sup>	1750	2100
5.0 kg/m <sup>2</sup>	1650	2050
5.5 kg/m <sup>2</sup>	1600	2000
6.0 kg/m <sup>2</sup>	1550	1950
7.0 kg/m <sup>2</sup>	1450	1850
8.5 kg/m <sup>2</sup>	1350	1750
10.5 kg/m <sup>2</sup>	1250	1650
13.0 kg/m <sup>2</sup>	1100	1550



Product available as standard in Global White.  
All measurements in millimetres. All sizes are nominal.



Availability of products may vary according to location.  
Please contact Armstrong Technical Sales for further details.

PRELUDE 24 CORROSIVE RESISTANT

Exposed 24mm grid system for higher humidity environments

Key Attributes

- Special paint finish and coated Cross Tee clips for enhanced corrosion resistance
- 700 hours salt spray test (EN ISO 9227)
- Durability Class C (EN 13964:2004 + A1:2006)



Application area

Higher humidity areas

Physical data



- Material: galvanised steel with additional protective treatment
- Surface finish: baked polyester paint
- Colour: Global White

PRELUDE 24 CORROSIVE RESISTANT - UNIVERSAL PEAKFORM MAIN RUNNER AND SUPERLOCK CLIP (bulb-to-bulb connection)




Item Nr.	Dimensions length (mm)	height (mm)	Content / pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
28 40 42	3600	43	20	72.00	21.00	30
28 41 42	3750	43	20	75.00	21.90	30

PRELUDE 24 CORROSIVE RESISTANT - TLX CROSSTEEES (Hook system, butt cut)




Item Nr.	Dimensions length (mm)	height (mm)	Content / pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
14 31 32	1250	38	60	72.00	18.20	72
14 30 32	1200	38	60	75.00	18.90	72
14 20 32	600	38	60	36.00	9.10	144
14 21 32	625	38	60	37.50	9.50	144

PERIMETER SOLUTION



Item Nr.	Description	Dimensions length (mm)	height (mm)	Content / Carton pcs	Weight / Carton kg
T 1924 LB	Corrosive resistant perimeter angle	3050	24	36	109.80


ACCESSORIES




**A WDNCR 20 H**  
Bent tee bar hanger  
for threaded rod



**A CR1827 G**  
Nut for threaded rod




**A CR827 G**  
1700 mm  
hanger with  
hook



**A CR12 G**  
Butterfly




**A CR1829 G**  
1000mm Threaded rod  
dia. 6 mm



**A CR7890 G**  
Universal retaining clip



**A CR11 G**  
Small hook



**T 1924 LB**  
Corrosive resistant  
suspension angle


SECTION DRAWINGS

Prelude 24 Corrosive Resistant - Universal Peakform Main Runners

Length	3750	78.125	156.25	21 x 156.25	156.25	78.125
	3600	50	100	33 x 100	100	50

Prelude 24 Corrosive Resistant - TLX Cross Tees

Length	1200	300	300	300	300
	1250	312.5	312.5	312.5	312.5




600/ 625

SYSTEM DRAWING (module 1200 x 600 mm)

Standard lay-in installation of 24 mm exposed suspension system using Board or Tegular edge tiles.

\*reduce to 450 if heavy tile / overlays are used or heavy service fittings are located near the perimeter.

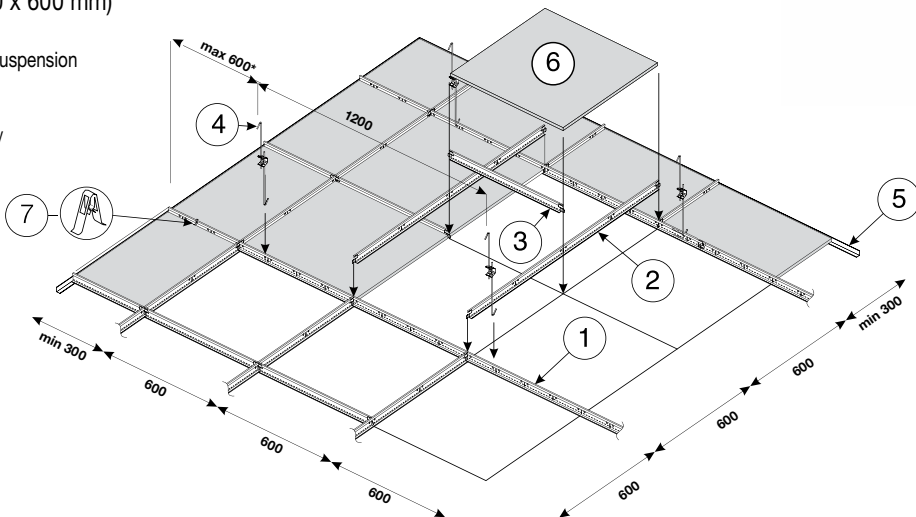

⑥ Tiles	Main Runner centres	Hangers centres	Quantities required per 1m² (no waste included)				
			① Main Runner	② Cross Tee 1200 mm	③ Cross Tee 600 mm	④ Hanger	⑦ Universal retaining clip
1200 x 600 mm 1.39 pcs	1200 mm	1200 mm	0.84 lm	1.67 lm	-	0.70 pcs	5.56 pcs
	600 mm	1200 mm	1.67 lm	-	0.84 lm	1.40 pcs	
600 x 600 mm 2.78 pcs	1200 mm	1200 mm	0.84 lm	1.67 lm	0.84 lm	0.70 pcs	1.40 pcs
	600 mm	1200 mm	1.67 lm	-	1.67 lm	1.40 pcs	

⑤ Perimeter trim approx. 0.70 lm/m²

The chart is for general guidance only.

GRID LOAD CAPACITIES

Prelude 24 Corrosive Resistant


The following table gives the maximum permitted hanger distance (mm) along the Peakform Main Runner (28 40 42) for the tile weights and Main Runner spacings noted.

Prelude 24 Corrosive Resistant Main Runner - 28 40 42		
Main Runner centres (mm)	1200	600
Cross Tee(s)	14 30 32 14 20 32	14 20 32
Configuration (Main Runner horizontal)		
Weight of ceiling tile (kg/m²)	Maximum suspension spacing along Main Runner (mm)	
2.5 kg/m²	1900	2100
3.0 kg/m²	1800	2100
3.5 kg/m²	1750	2100
4.0 kg/m²	1650	2050
5.0 kg/m²	1550	2000
5.5 kg/m²	1550	1950
6.0 kg/m²	1500	1900
7.0 kg/m²	1400	1800
8.5 kg/m²	1300	1700
10.5 kg/m²	1150	1600
13.0 kg/m²	1050	1500

- Values in the above table conform to Class 1 as defined in EN 13964:2004+A1:2006 table 6. For other classes /deflection limits please contact your local Armstrong Technical Sales team.
- Values are determined from laboratory tests methods in accordance with EN 13964:2004+A1:2006 clause 5.
- Values are applicable for 600 x 600 mm tiles assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span).
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, see the grid loading technical section on pages 102-103.



All measurements in millimetres. All sizes are nominal.

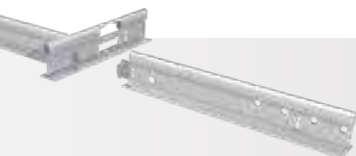

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# CLEAN ROOM 24

Exposed 24mm co-extruded grid system for clean rooms and non-magnetic areas

Key Attributes

- Aluminium construction: non-magnetic system with high corrosion resistance
- Co-extruded gasket: better seal between tile and grid
- Class 4 performance as per ISO standard 14644-1

Application area

Healthcare, Hi-tech manufacturing

Physical data


- Material : co-extruded aluminium with gasket
- Surface finish: extruded PVC
- Colour: White

CLEAN ROOM 24 - MAIN RUNNER



Item Nr.	Dimensions length (mm)	height (mm)	Content / pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
EA 794044	3600	43	20	72.00	24.00	30


CLEAN ROOM 24 - CROSSTEES + PERIMETER TRIM

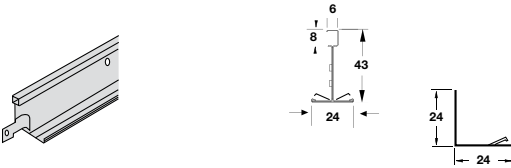


EA 793044	1200	43	60	72.00	26.00	20
EA 792044	600	43	60	36.00	12.00	40
EA 7801	3660	24	30	109.80	20.00	25

SECTION DRAWINGS


Clean Room 24 - Main Runner

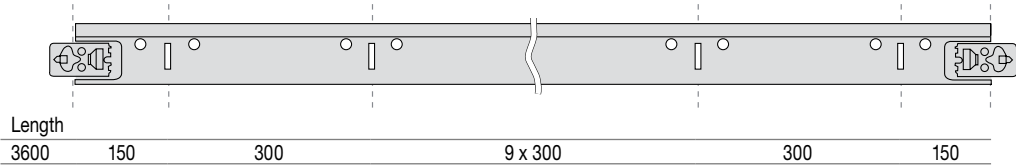



Clean Room 24 - Cross Tees

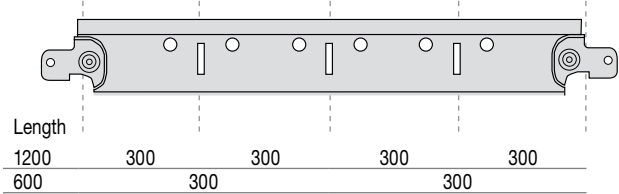


ACCESSORIES - Corrosion resistance 700 hours salt spray test



**CHDC**  
Hold down clip suitable  
for non-magnetic areas



**A 426 G**  
Board access clip

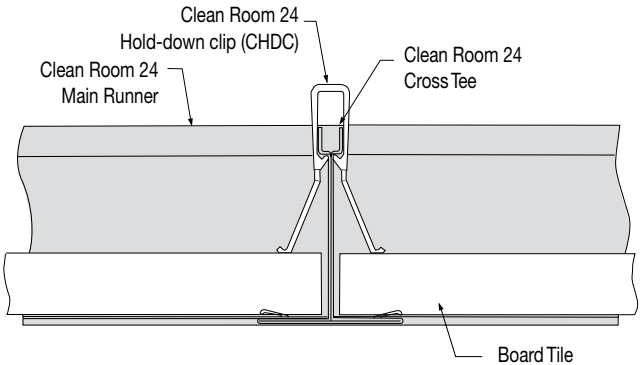

GRID LOAD CAPACITIES

Clean Room 24

The table gives the maximum permitted hanger distance (mm) along the Clean Room Grid Main Runner (EA 794044) for the tile weights and Main Runner spacings noted.

Clean Room 24 Main Runner - EA 794044		
Main Runner centres (mm)	1200	600
Cross Tee(s)	EA 793044 EA 792044	EA 792044
Configuration (Main Runner horizontal)		
Weight of ceiling tile (kg/m²)	Maximum suspension spacing along Main Runner (mm)	
2.5 kg/m²	1850	2100
3.0 kg/m²	1750	2100
3.5 kg/m²	1700	2100
4.0 kg/m²	1650	2050
5.0 kg/m²	1550	1950
5.5 kg/m²	1500	1900
6.0 kg/m²	1450	1850
7.0 kg/m²	1400	1800
8.5 kg/m²	1300	1700
10.5 kg/m²	1200	1600
13.0 kg/m²	1050	1450

- Values in the above table conform to Class 1 as defined in EN 13964:2004+A1:2006 table 6. For other classes /deflection limits please contact your local Armstrong Technical Sales team.
- Values are determined from laboratory tests methods in accordance with EN 13964:2004+A1:2006 clause 5.
- Values are applicable for 600 x 600 mm tiles assuming that the maximum deflection of the grid is L/500 but not greater than 4 mm (L = span).
- No other applied loads such as luminaires, air diffusers, smoke detectors, sprinklers, hanging signs etc. are permitted.
- No overlays such as mineral wool or fibre glass quilts, as may be required for enhanced acoustic, fire or thermal performance, are permitted unless their full weight is established and included, together with the weight of the tile, within the appropriate weight groups.
- For grid loading data calculated to different criteria than Class 1 to EN13964:2004+A1:2006, see the grid loading technical section on pages 102-103.



All measurements in millimetres. All sizes are nominal.

Availability of products may vary  
according to location.  
Please contact Armstrong Technical  
Sales for further details.


# SEISMIC RX® SYSTEM

Exposed 24mm grid system with specialist installation accessories and detailing

Key Attributes


- Independently tested system to withstand the forces from significant seismic activity or other severe events
- Standard grid sections: Prelude 24 Peakform Main Runner and Prelude 24 XL<sup>2</sup> Cross Tees
- Special accessories: quicker, more cost effective seismic installations
- Solutions for moderate hazard and high/very high hazard areas

PRELUDE 24 - UNIVERSAL PEAKFORM MAIN RUNNERS AND SUPERLOCK CLIP (bulb-to-bulb connection)

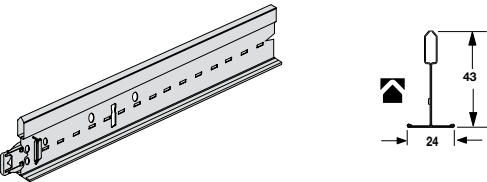


Item Nr.	Dimensions length (mm)	height (mm)	Content pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
31 40 32 A <sup>(1)</sup>	3600	43	20	72.00	21.00	30
31 41 33 B	3750	43	20	67.50	20.00	30

PRELUDE 24 - XL<sup>2</sup> CROSSTEES (stab system, override)

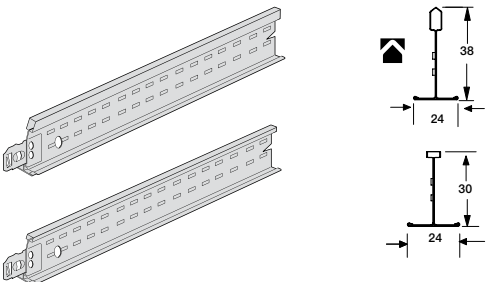

Cross Tees slotted						
31 30 51 B <sup>(1)</sup>	1200	38	60	72.00	18.20	72
31 31 51 B <sup>(1)</sup>	1250	38	60	75.00	18.90	72
Cross Tees unslotted						
31 20 21 A <sup>(1)</sup>	600	30	60	36.00	8.20	144
31 21 23 A <sup>(1)</sup>	625	30	60	37.50	8.60	144


ACCESSORIES

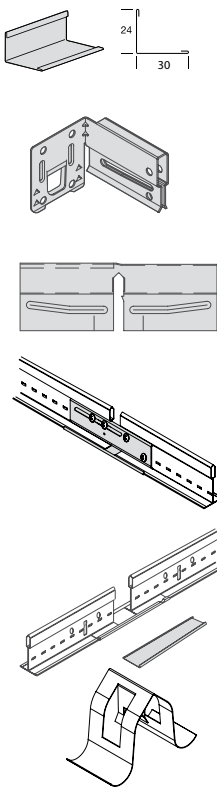


Item Nr.	Description	Dimensions height (mm)	Content / Carton pcs	Weight / Carton kg	Cartons / Pallet
T 3024 H	Perimeter angle. painted	3000	40	28.50	50
BERC2	Main Runner end retaining clip	50	200	9.00	36
SJCG	Seismic joint clip XL <sup>2</sup> Cross Tee (24mm)	-	200	7.00	36
SJMR15	Seismic joint clip Peakform Main Runner (24mm)	-	100	11.00	60
ES 4	Expansion sleeve (24mm)	100	100	1.00	170
442	Vector Seismic clip	-	100	1.63	-

SYSTEM DRAWINGS


Seismic Joint Clip Main Runner




Seismic Joint Clip Cross Tee




Bracing Detail

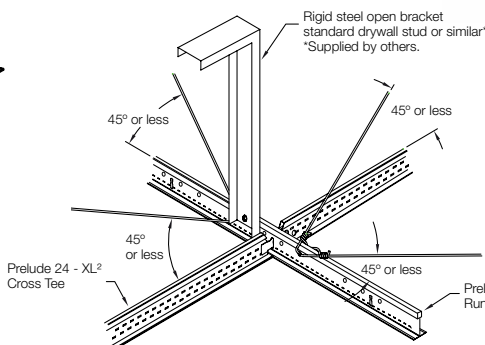

Moderate Hazard Seismic Rx® System

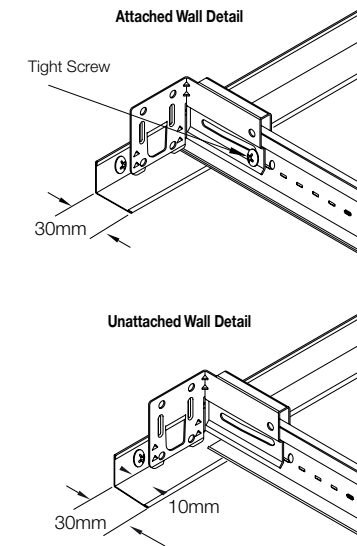


High /Very High Hazard Seismic Rx® System

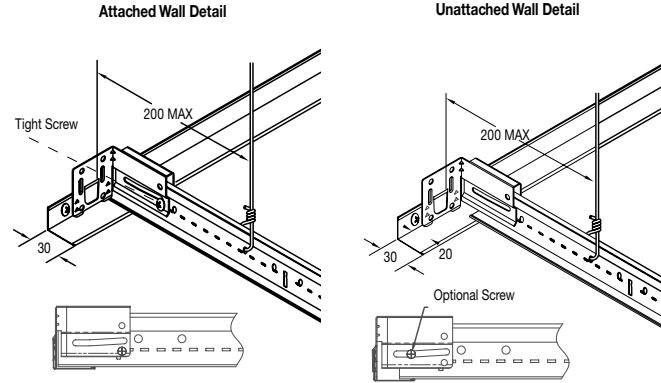

The Seismic Rx® system installation method will depend upon the hazard level required for the installation. For more information on which of the above system drawings apply to which risk category, please refer to our **Installation Guidelines for Seismic Applications** brochure, or contact Armstrong Technical Sales.



Shake table frame for Seismic testing

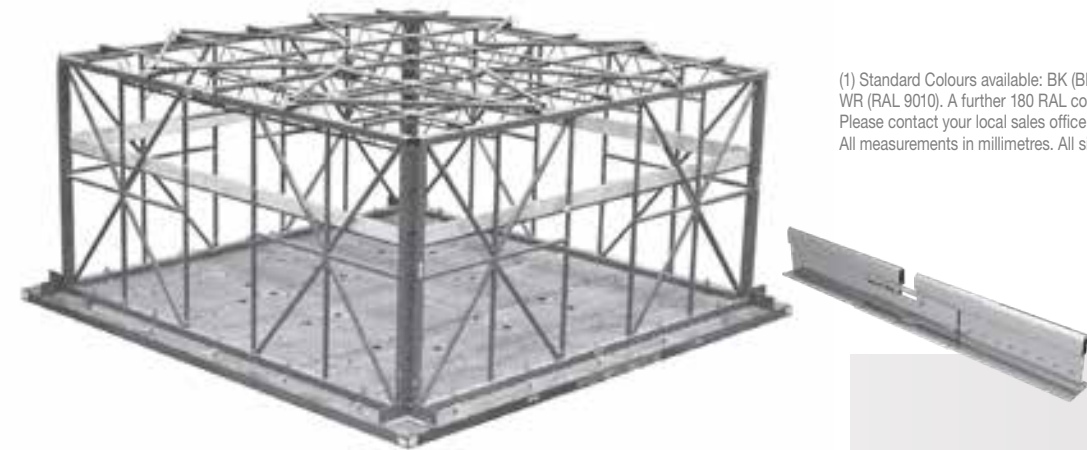

(1) Standard Colours available: BK (Black), BS (Brass), CE (Chrome), SG (RAL9006), WR (RAL 9010). A further 180 RAL colours are available as a special on request. Please contact your local sales office. All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



DRYWALL GRID SYSTEM

38mm grid systems for flat or curved plasterboard ceilings

Key Attributes

- Engineered Main Runner and Cross Tee system: quick and easy to set-out and install
- Reverse hem: prevents screw spin-off - rotary stitched: strength and extra stability
- Faceted Main Runner option: form curved or domed ceilings on site - no pre-ordering curved profiles
- Full range of accessories: detailing for changes of level - compatible with Axiom for transition to suspended ceilings

Application area

Plasterboard ceilings

Physical data

- Material: galvanised steel
- Surface finish: galvanised
- Colour: n/a

PEAKFORM MAIN RUNNER AND SUPERLOCK CLIP (bulb-to-bulb connection)

Item Nr.	length (mm)	Dimensions height (mm)	width (mm)	Content / Carton pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
Main Runners							
7940 G slot at 150mm	3600	38	38	12	43.20	20	36
7942 G slot at 150mm	3000	38	38	12	36.00	17	36
7941 G slot at 100mm	3600	38	38	12	43.20	19.52	36
Faceted Main Runners							
HD 8906 F08 G	3658	43	38	12	43.92	22	24
HD 8906 F16 G	3658	43	38	12	43.92	22	24
Cross Tees							
7930 G	1200	38	38	36	43.20	20	48
7918	900	38	38	36	33.00	15	48
7920 G	600	38	38	36	21.60	10	96
Unhemmed C channel							
7838 G	3048 (120")	40	20	20	60.96	16	32
Knurled angle trim							
KAM 12 B	3658 (12')	32	32	30	109.72	26	12

ACCESSORIES

A variety of Drywall Grid accessories are available to provide problem solving solutions that save time, labour and money.

**DW50 LT**  
Transition clip 13 mm plasterboard (1/2")

**DWACS AG**  
Drywall attachment clip

**XTAC AG**  
Cross Tee adapter clip

**DW30C AG  
DW45C AG  
DW60C AG  
DW90C AG**  
Drywall angle clips

**DLCC AG**  
Direct load ceiling clip

**DW58 LTAG**  
Transition clip for 15 mm plasterboard (5/8")

**RC2 AG**  
Radius clip

**MBAC AG**  
Main Runner adapter clip

DGS SHORTSPAN CORRIDOR

38mm grid system for plasterboard ceilings in corridors or small rooms

Key Attributes

- Locking angle trim: quick and easy to set-out
- Shortspan T-Bars: lock into the Locking Angle Trim for fast installation
- Reduced number of hangers
- Reverse hem: prevents screw spin-off - rotary stitched: strength and extra stability

Application area

Plasterboard corridors or small rooms

Physical data

- Material: galvanised steel
- Surface finish: Galvanised
- Colour: n/a


DRYWALL GRID SYSTEM (DGS) SHORTSPAN PRODUCT RANGE

Item Nr.	Designation	Dimensions length (mm)	height (mm)	Content / Carton pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
Shortspan T-bars							
S 7708 G		2438 (8')	38	12	29.26	13	24
S 7710 G		3048 (10')	38	12	36.57	17	24
S 7712 G		3658 (12')	38	12	43.89	20	24
S 7714 G		4267 (14')	38	12	51.20	23	24
Locking angle trims							
LAT 12 H	Locking tabs at 150mm for the BP LAT 12H	3600	32	30	109.72	18	12
LAT 10 H	Locking tabs at 100mm for the BP LAT 10H	3000	30	30	110.00	15	12
Knurled angle trim							
KAM 12 B		3660 (12')	32	10	36.60	9	50

The ShortSpan system is designed for use in drywall ceilings where the spans do not exceed 4200mm. The individual ShortSpan tees are not designed to be used independent of the locking angle trim (LAT 12 H) or optional knurled angle trim (KAM 12 B).

SYSTEM DRAWING

The gap between wall trim and shortspan should not be over 3mm

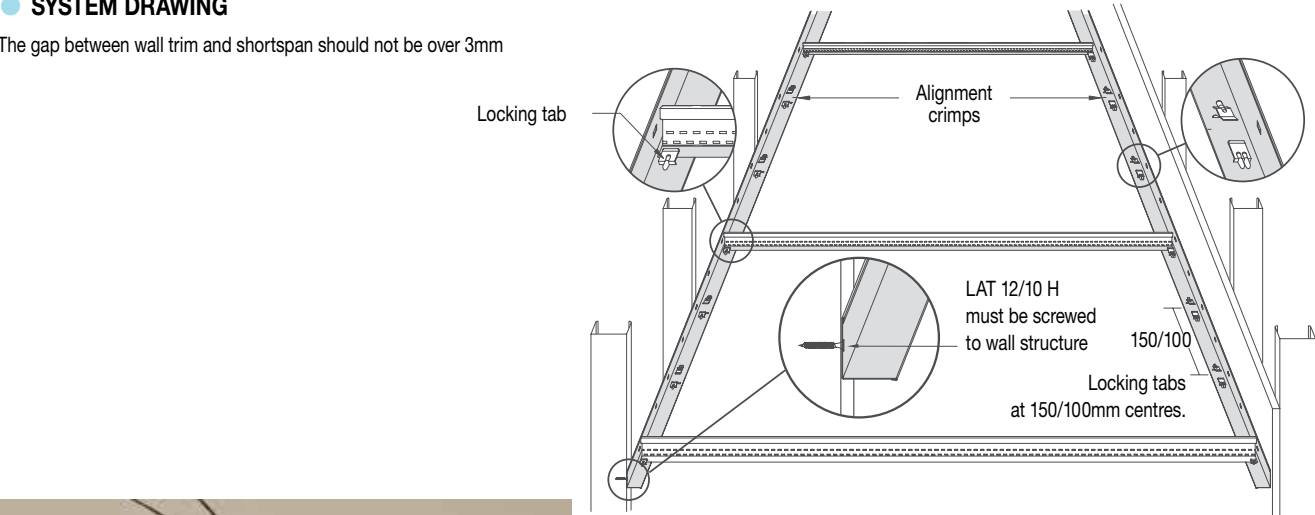

"": inches  
All measurements in millimetres. All sizes are nominal.  
For more information, please ask for the Drywall Grid System Standard and Faceted brochure.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# LONGSPAN

## Primary grid system

### Key Attributes

- Create a primary framework underneath beams or between walls
- Install a suspended ceiling below, using fewer suspension points to the structure


## Application area

Industrial / Transport / Buildings with limited suspension points

### Physical data






- Material: galvanised steel
- Surface finish: galvanised
- Colour: n/a

## PRIMARY CHANNELS



Item Nr.	Dimensions		Content / Carton		Weight / Carton	Cartons / Pallet
	length (mm)	height (mm)	pcs	lm		
LP 546 G	5000	54	5	25.00	21.60	10
LP 856 G	5000	85	5	25.00	25.20	10
LP 120 G	6500	120	5	32.50	76.50	10

## ACCESSORIES



Item Nr.	Description	Dimensions	Content / Carton	Weight / Carton
		height (mm)	pcs	kg
A 4510 G	Bent hanger for T profile	-	50	1.90

A 1820 G	Beam flange clip 1.6 to 4.8 mm thickness	47	100	2.20
A 1821 G	Beam flange clip 4.8 to 9.5 mm thickness	47	100	3.20


B 11067 G	Special holding clamp*	54	100	1.55
B 11065 G	"	85	100	2.90
B 11064 G	"	120	50	3.30

A M4538 G	Wall connection	54	25	1.50
A M4534 G	"	85	25	3.25
A M4529 G	"	120	25	5.90

A R4537 G	Connector	54	25	1.90
A R4533 G	"	85	25	4.25
A R4528 G	"	120	25	7.00

C 3000 H	Channel 19 x 38 mm	38	20	26.50
CA 120 G	Preformed channel clip**	-	100	0.50

## SYSTEM DRAWING

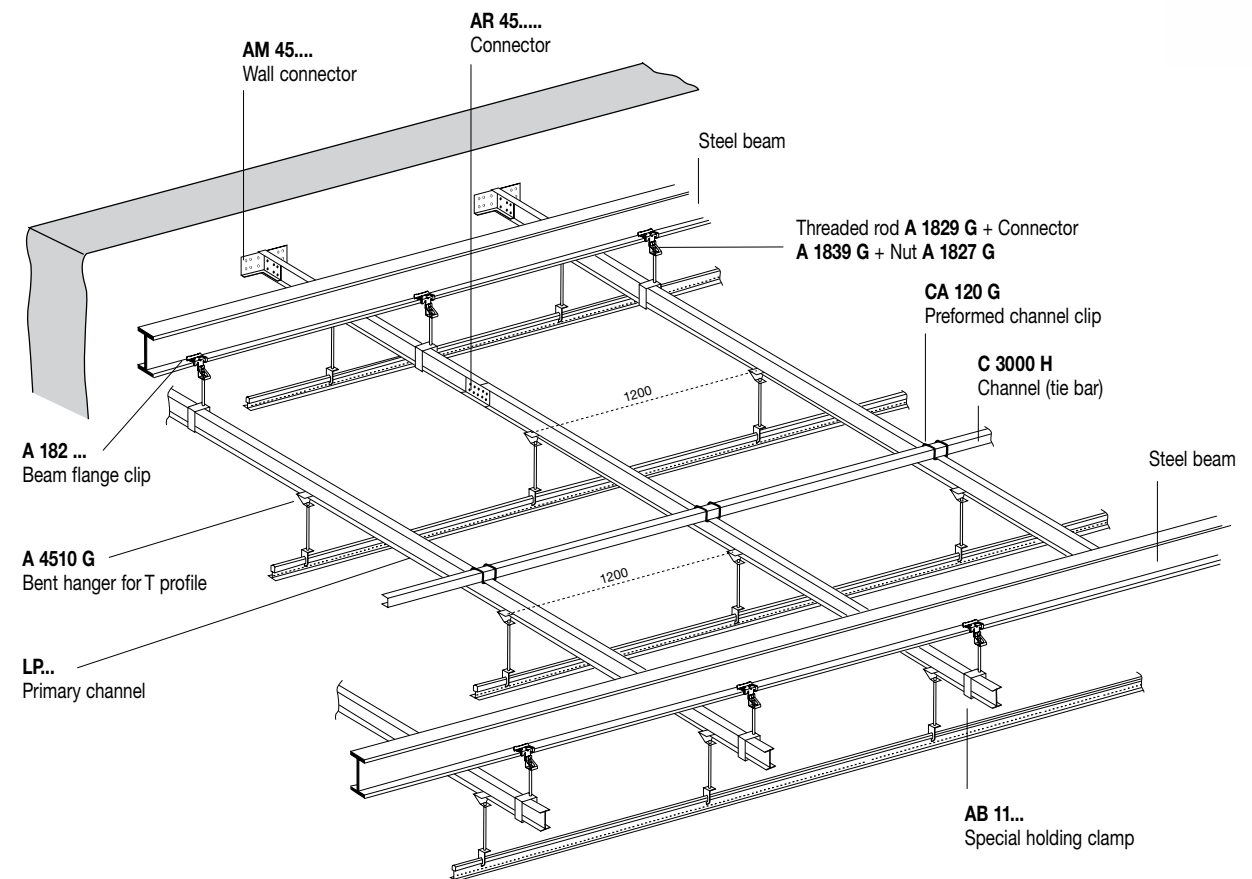

### Note:

- Two wall connectors AM 45... must be used to fix to walls.
- Two connectors AR 45... must be used when connecting two lengths of Primary Channel together.
- Two preformed channel clips CA 120 G must be installed on the opposites sides of the Primary channel

## GRID LOAD CAPACITIES (LongSpan System) Space 1200 mm

Spacing between suspensions (m)	1 tie bar										2 tie bars								3 tie bars	
	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.50	5.75	6.00	6.50
Item Nr.																				
LP 546 G		48	48	32	23	16	12	9												
LP 856 G					48	42	25	19	15	12	10	8	7	7						
LP 120 G										48	30	24	20	17	14	12	10	9	8	6

### Note:

- Uniformly distributed load kg/m<sup>2</sup>. Load charges in kg/m<sup>2</sup> for deflection L/300.



\*Both Bent hanger for T profile and special holding clamp only work with threaded rod A 1829 G+ Connector A1839 G + nut (A 1827 G)  
 \*\*Install one clip on each side of the Channel C 3000 H  
 All measurements in millimetres. All sizes are nominal.



Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# U-PROFILE SYSTEM

Primary suspension system for modular metal ceiling systems

Key Attributes

- Unique plug-in clip for quick and accurate installation
- Compatible with multiple suspension profiles or used independently for Metal D-H 700 and V-P 500 systems
- Full range of accessories to support multiple suspension profiles - uniform suspension depth for standard systems


Application area

All areas

Physical data

- Material: galvanised steel
- Surface finish: galvanised
- Colour: n/a


U-PROFILE

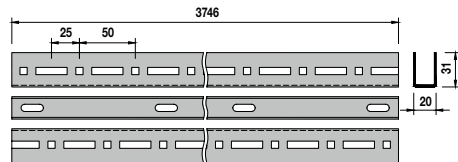

Item Nr.	Dimensions mm	Material	Content / Carton		Weight / Carton
			pcs	lm	kg
M300100	3746 x 20 x 31	Galvanised steel	10	37.5	28.9


For a module length of 3750 mm.

ACCESSORIES




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M300119	Connector for U-profile	Galvanised steel	95 x 23 x 17	100	5.3
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
M300140	Wall anchor	"	90 x 35 x 25	100	3.7
M311303	Hexagonal bolt M6 x 16 mm	"	M6 x 16	100	0.5
M311103	Hexagonal nut M6	"	M6 x 5	100	0.3
M311305	Washer M6 18 x 1.6 mm	"	Ø18 x 1.6	100	0.3


BRIDGING CARRIER OPTION (for longer spans)




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M300101	Connector for bridging carrier	Galvanised steel	158 x 73 x 2	50	6.2
M311195	Thread cutting screw M6 x 10 mm	"	M6 x 10	100	0.5

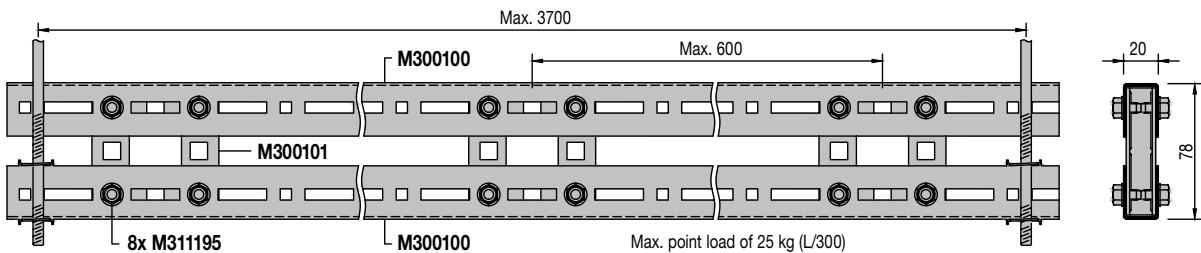


SYSTEM DRAWING

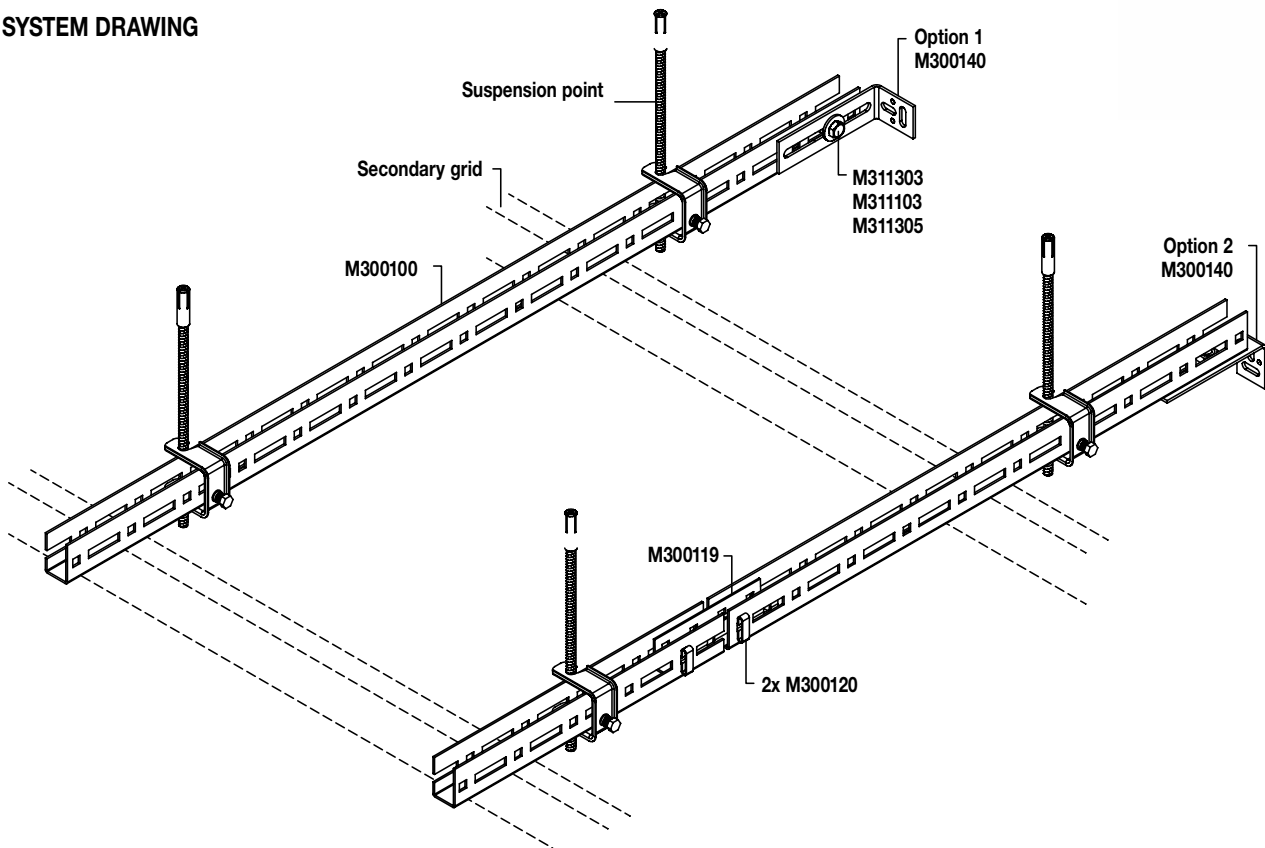


SUSPENSION METHODS

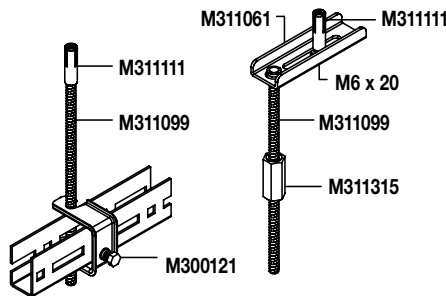


• Clamping bracket



• Hanger for U-profile

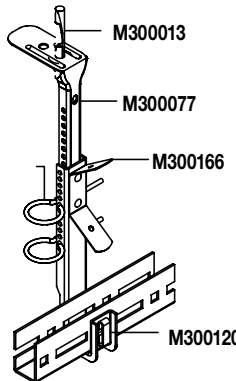

• Combi nonius hanger with nonius top part

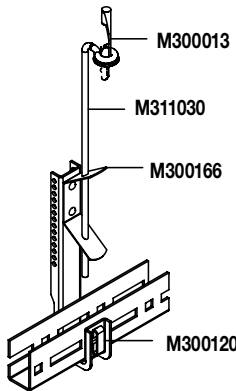

• Combin nonius hanger with eye wire



All measurements in millimetres.  
All sizes are nominal.


Availability of products may vary  
according to location.  
Please contact Armstrong Technical  
Sales for further details.

# U-PROFILE SYSTEM


## SUSPENSION ACCESSORIES



Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
Clamping bracket option					
M300121	Clamping bracket	Galvanised steel	43 x 37 x 20	100	2.3
M311111	Expansion bolt M6 x 30 mm	"	M6 x 30	100	0.8
M311097	Threaded rod M6 x 500 mm	"	M6 x 500	100	8.4
M311099	Threaded rod M6 x 1000 mm	"	M6 x 1000	100	16.0
M311101	Threaded rod M6 x 2000 mm	"	M6 x 2000	100	32.0
M311315	Hexagonal extension nut M6 x 30 mm	"	M6 x 30	100	1.3
M311061	Suspension element for threaded rod M6	"	80 x 25 x 10	100	4.3

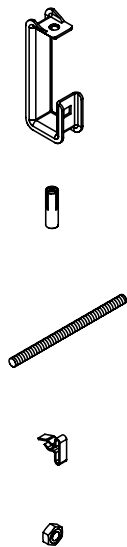

Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
Hanger for U-profile option					
M300366	Hanger for U-profile	Galvanised steel	85 x 33 x 19	100	3.8
M311111	Expansion bolt M6 x 30 mm	"	M6 x 30	100	0.8
M311097	Threaded rod M6 x 500 mm	"	M6 x 500	100	8.4
M311099	Threaded rod M6 x 1000 mm	"	M6 x 1000	100	16.0
M311101	Threaded rod M6 x 2000 mm	"	M6 x 2000	100	32.0
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
M311103	Hexagonal nut M6	"	M6 x 5	100	0.3

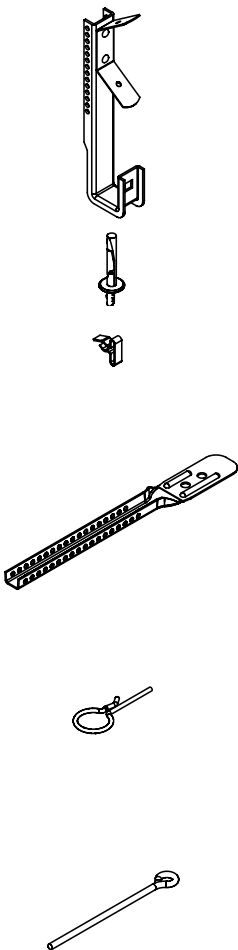

Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
Combi Nonius hanger option					
M300166	Combi Nonius hanger	Galvanised steel	139 x 36 x 19	100	6.6
M300013	Percussion dowel BZ 6 S	"	38 x 16	100	1.2
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
M300071	Nonius top part 200 mm	"	200 x 25 x 9	100	3.4
M300074	Nonius top part 500 mm	"	500 x 25 x 9	100	9.0
M300075	Nonius top part 700 mm	"	700 x 25 x 9	100	13.0
M300076	Nonius top part 1000 mm	"	1000 x 25 x 9	100	18.5
M300077	Nonius top part 1500 mm	"	1500 x 25 x 9	100	27.8
M300036	Nonius locking pin	"	65 x 24	100	0.7
M311158	Eye wire 250 mm	"	250 x 4	100	2.5
M311159	Eye wire 375 mm	"	375 x 4	100	3.8
M311029	Eye wire 500 mm	"	500 x 4	100	5.0
M311160	Eye wire 750 mm	"	750 x 4	100	7.5
M311030	Eye wire 1000 mm	"	1000 x 4	100	10.0
M311161	Eye wire 1500 mm	"	1500 x 4	100	15.0



All measurements in millimetres.  
All sizes are nominal.

Availability of products may vary  
according to location.  
Please contact Armstrong Technical  
Sales for further details.



# C-CHANNEL SYSTEM

Primary suspension system for modular metal ceiling systems

Key Attributes

- Typically used with Spring-T for suspension of Metal T-Clip F ceilings


Application area

Offices / Kitchens / Toilets

Physical data


- Material: galvanised steel
- Surface finish: galvanised
- Colour: n/a

C-CHANNEL




Item Nr.	Description	Dimensions mm	Material	Content / Carton pcs	Carton lm	Weight / Carton kg
C3000H	C Channel 19 x 38 mm	4000 x 19 x 38	Galvanised steel	8	32.0	26.7

ACCESSORIES




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
C7140	Connector for C-channel	Galvanised steel	124 x 34 x 9	250	11.0

SUSPENSION ACCESSORIES

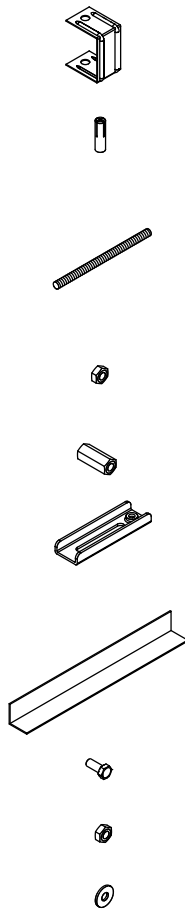


Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
Clamp option					
CA97H	Clamp for C-channel	Galvanised steel	25 x 30 x 40	100	1.7
M311111	Expansion bolt M6 x 30 mm	"	M6 x 30	100	0.8
M311097	Threaded rod M6 x 500 mm	"	M6 x 500	100	8.4
M311099	Threaded rod M6 x 1000 mm	"	M6 x 1000	100	16.0
M311101	Threaded rod M6 x 2000 mm	"	M6 x 2000	100	32.0
M311103	Hexagonal nut M6	"	M6 x 5	100	0.3
M311315	Hexagonal extension nut M6 x 30 mm	"	M6 x 30	100	1.3
M311061	Suspension element for threaded rod M6	"	80 x 25 x 10	100	4.3
Suspension angle option					
A952G	Suspension angle	Galvanised steel	3600	20	13.30
M311303	Hexagonal bolt M6 x 16 mm	"	M6 x 16	100	0.5
M311103	Hexagonal nut M6	"	M6 x 5	100	0.3
M311305	Washer M6 18 x 1.6 mm	"	Ø18 x 1.6	100	0.3

SYSTEM DRAWING

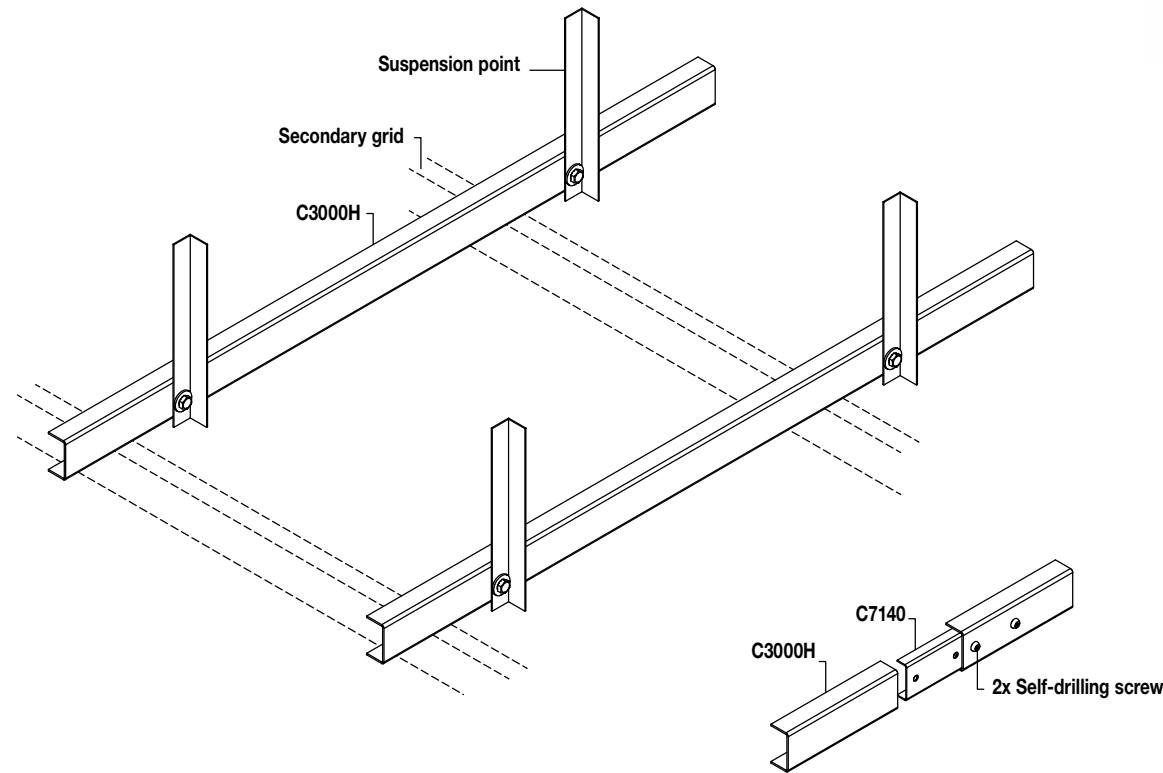

SUSPENSION METHODS

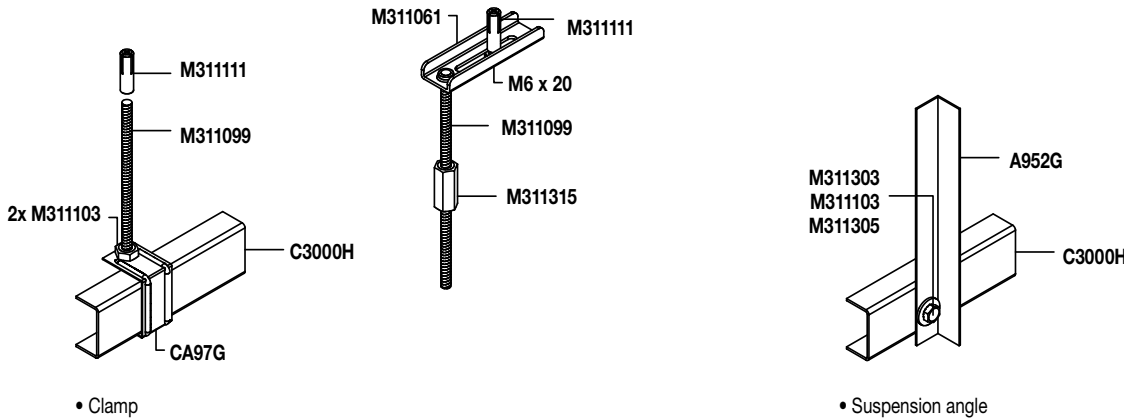

All measurements in millimetres.  
All sizes are nominal.

Availability of products may vary  
according to location.  
Please contact Armstrong Technical  
Sales for further details.

# DP12 A-BAR

Suspension profile for Q-Clip, R-Clip, S-Clip F, D-Clip and K-Clip metal ceiling systems

## Key Attributes

- Compatible with U-Profile primary grid system
- Alternative independent suspension options
- Brackets for swing-down functionality or secure installations


## Application area

Offices / Clean rooms / Seismic applications / Exterior ceilings

## Physical data


- Material: galvanised steel
- Surface finish: galvanised
- Colour: n/a

## DP12 A-BAR




Item Nr.	Dimensions mm	Material	Content / Carton pcs	Weight / Carton kg
M311022	4000 x 40 x 16	Galvanised steel	10	21.3

## ACCESSORIES

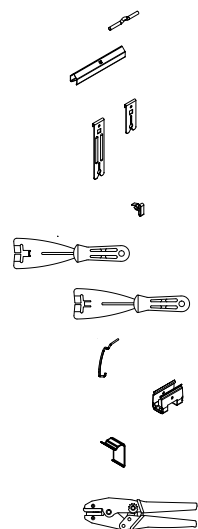


Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M300138	Connection-pin for DP12 A-Bar	Galvanised steel	60 x 5	100	0.8
M311023	Connector for DP12 A-Bar	"	100 x 17 x 15	100	2.0
M300105D	Hanger for DP12 A-Bar	"	52 x 20 x 4	100	0.6
M300155	Large hanger for DP12 A-Bar	"	100 x 20 x 4	100	0.9
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
M311028	Extraction tool (for Q-Clip / R-Clip / K-Clip system)	Steel / plastic	228 x 60 x 21	1	0.1
M311046	Extraction tool (for S-Clip F system)	"	228 x 60 x 21	1	0.1
M300106	Security clip (for Q-Clip / R-Clip / K-Clip system)	Galvanised steel	54 x 40	100	0.2
M311027	Swing-down bracket for Window function	"	43 x 32 x 20	100	2.4
M300157	Security clamp for Window function	Spring steel	38 x 17 x 10	100	0.4
M311180	Nubby pliers (for Q-Clip / R-Clip / K-Clip system)	Steel / plastic	224	1	0.5

## SUSPENSION ACCESSORIES



Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
<b>Direct hanger option</b>					
M300125	Direct hanger for DP12 A-Bar	Galvanised steel	109 x 40 x 30	100	4.7
<b>Rapid hanger option</b>					
M311026	Rapid hanger for DP12 A-Bar	Galvanised steel	122 x 26 x 24	100	1.3
M311158	Eye wire 250 mm	"	250 x 4	100	2.5
M311159	Eye wire 375 mm	"	375 x 4	100	3.8
M311029	Eye wire 500 mm	"	500 x 4	100	5.0
M311160	Eye wire 750 mm	"	750 x 4	100	7.5
M311030	Eye wire 1000 mm	"	1000 x 4	100	10.0
M311161	Eye wire 1500 mm	"	1500 x 4	100	15.0
M300013	Percussion dowel BZ 6 S	"	38 x 16	100	1.2
<b>Nonius hanger option</b>					
M311338	Nonius hanger for DP12 A-Bar	Galvanised steel	190 x 27 x 9	100	4.3
M300071	Nonius top part 200 mm	"	200 x 25 x 9	100	3.4
M300074	Nonius top part 500 mm	"	500 x 25 x 9	100	9.0
M300075	Nonius top part 700 mm	"	700 x 25 x 9	100	13.0
M300076	Nonius top part 1000 mm	"	1000 x 25 x 9	100	18.5
M300077	Nonius top part 1500 mm	"	1500 x 25 x 9	100	27.8
M300036	Nonius locking pin	"	65 x 24	100	0.7
M300013	Percussion dowel BZ 6 S	"	38 x 16	100	1.2

## SYSTEM DRAWING

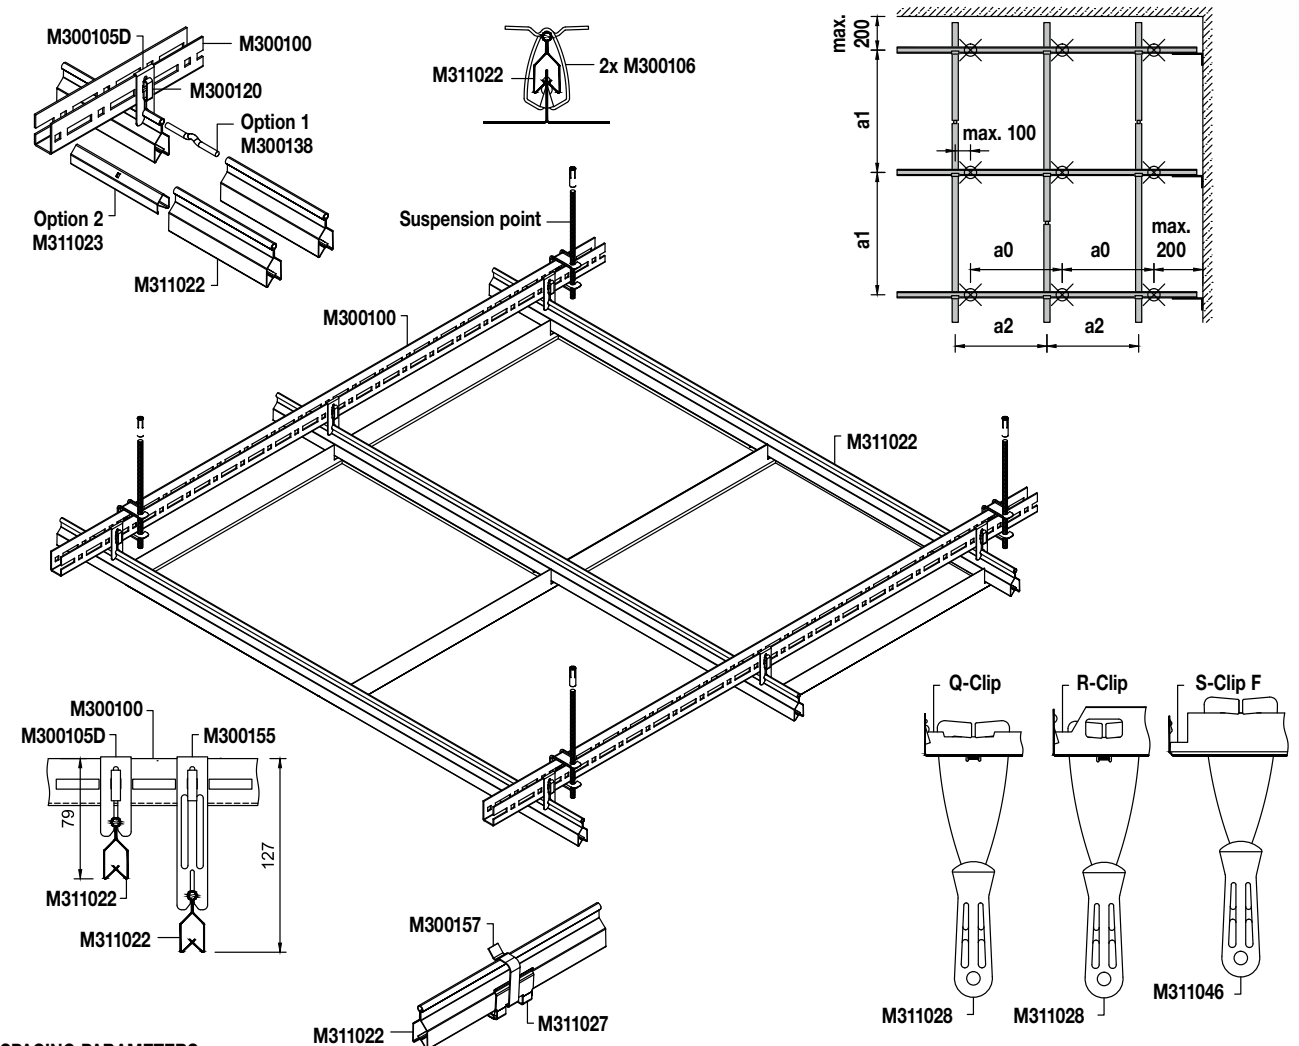


## SPACING PARAMETERS

a2 [mm]	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	
a0 [mm]	1800	1300	1400	1500	1600	1700	1800	1900	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	975	1000	1025	1050	1075	1100	1125	1150	1175	1200	1225	1250	
a1 [mm]	1900	1900	1850	1800	1750	1700	1650	1650	1600	1600	1550	1550	1500	1500	1450	1450	1400	1400	1400	1400	1400	1400	1350	1350	1350	1350	1300	1300	1300	1300	1250	1250	1250	1250	1250	1200	1200	1200	1200	
a1* [mm]	1700	1650	1600	1550	1500	1500	1450	1450	1400	1400	1350	1350	1350	1300	1300	1250	1250	1250	1250	1200	1200	1200	1200	1200	1150	1150	1150	1100	1100	1100	1100	1100	1100	1100	1050	1050	1050	1050	1050	1050

\* System with additional load + 4 kg/m²

## OPTIONAL SUSPENSION METHODS

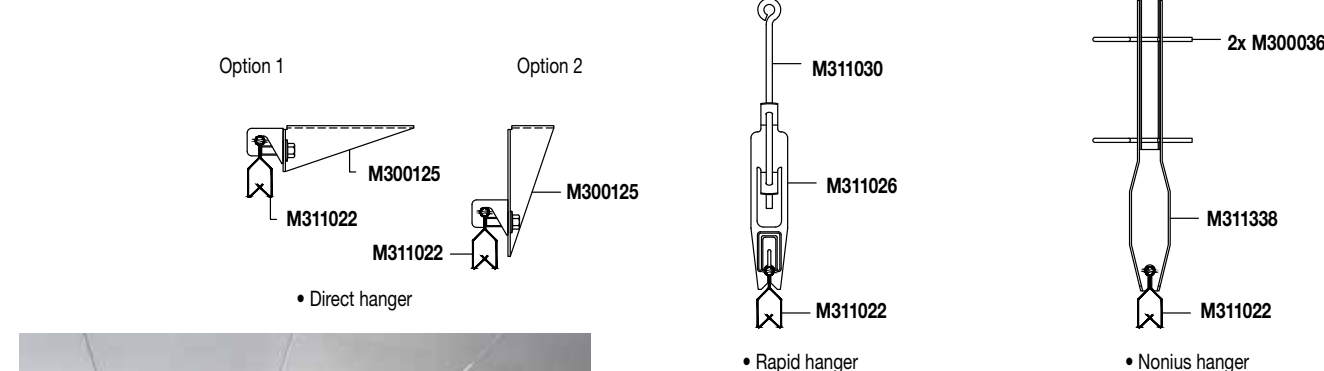

All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# SPRING-T

Suspension profile for T-Clip F metal ceiling systems

Key Attributes

- Typically used with C-Channel System for suspension of Metal T-Clip F ceilings
- Alternative options are direct suspension or to use the U-Profile System
- Security clip for secure installations


Application area

Offices / Kitchens / Toilets

Physical data


- Material: galvanised steel
- Surface finish: galvanised
- Colour: n/a

SPRING-T




Item Nr.	Dimensions	Material	Content / Carton		Weight / Carton
	mm		pcs	lm	kg
C1801H	3600 x 36 x 28	Galvanised steel	20	72	21.4

ACCESSORIES & TOOLS


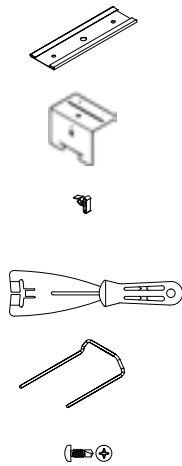


Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
C1805H	Splice plate for Spring-T	Galvanised steel	125 x 38 x 3	500	5.5
C2090A	Universal hanger for Spring-T	"	60 x 46 x 37	100	6.8
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
M311046	Extraction tool (for T-Clip F system)	Steel	228 x 60 x 21	1	0.1
C1775	Security clip (for T-Clip F system)	"	96 x 64 x 20	100	0.035
M311091	Self-drilling screw 3,9x13 mm	"	Ø3.9 x 13	100	0.1

FURTHER DETAILS


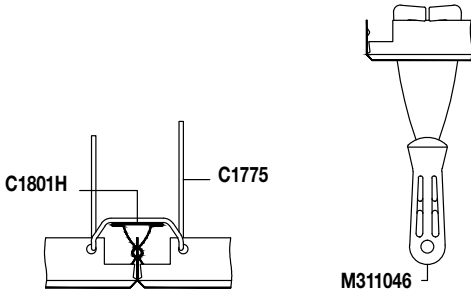


SYSTEM DRAWING WITH C-CHANNEL\*

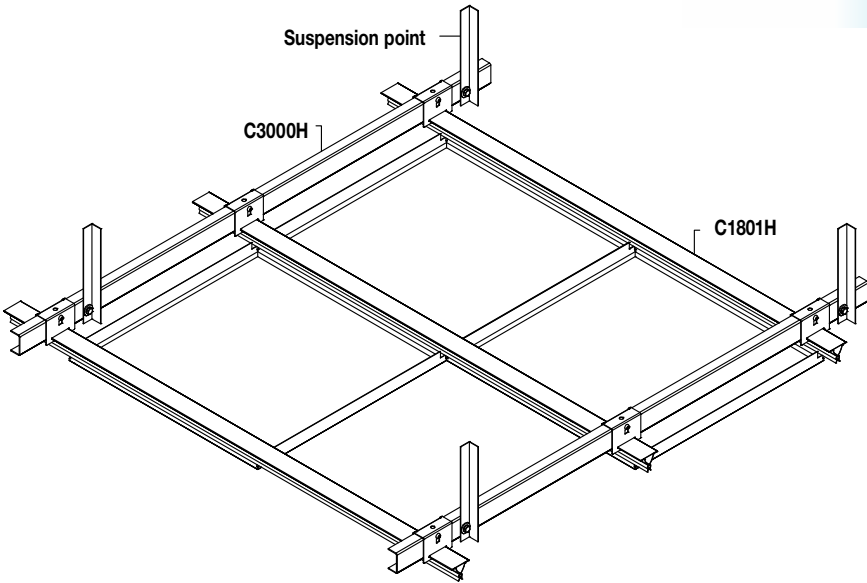

\* Half Spring-T C1802G also available for C-Channel System.

SYSTEM DRAWING WITH U-PROFILE

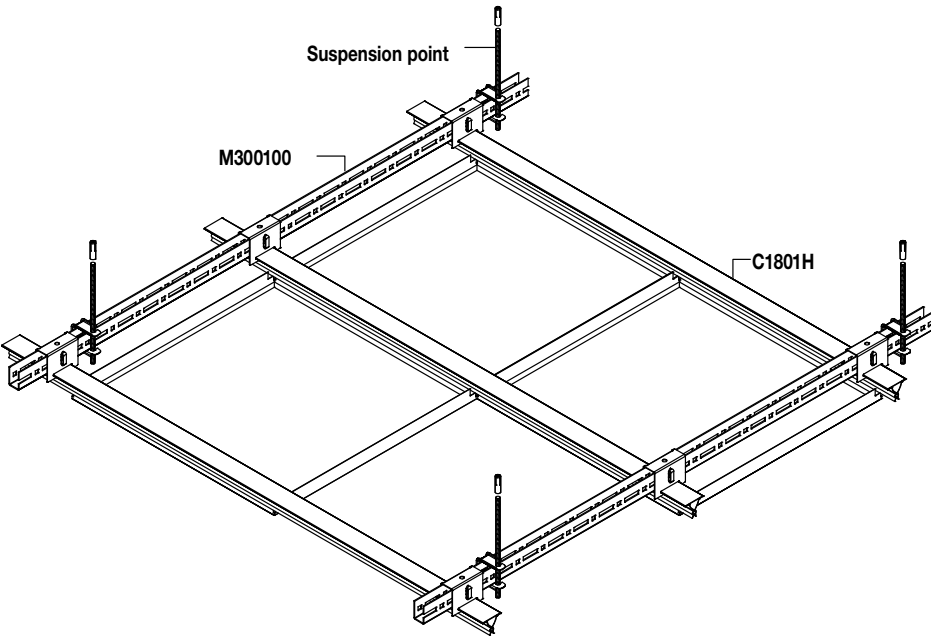

For loading information / spacing parameters, please contact Armstrong Technical Sales. All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

C-PROFILE

Exposed grid profile in a range of different widths for installation with Metal B-H 300 system

Key Attributes

- Compatible with U-Profile primary grid system
- Alternative independent suspension options
- Bracket for fixing partitions


Application area

Retail / Open plan offices / Laboratories / Transport

Physical data


- Material: galvanised steel
- Surface finish: polyester powder painted
- Standard colour: RAL 9010
- Other colours available upon request

C-PROFILE




Item Nr.	Dimensions mm	Material	Content / Carton pcs	Carton lm	Weight / Carton kg
Standard					
M215500	4000 x 100 x 30	Galvanised steel	4	16	21.7
Optional					
M215498	4000 x 50 x 30	"	4	16	15.5
M215499	4000 x 75 x 30	"	4	16	18.6
M215502	6000 x 100 x 30	"	4	24	32.6
M215003	4000 x 125 x 30	"	4	16	31
M215556	4000 x 150 x 30	"	1	4	8.7
M215557	4000 x 200 x 30	"	1	4	10.6
M215558	4000 x 250 x 30	"	1	4	12.6
M215559	4000 x 300 x 30	"	1	4	14.6

ACCESSORIES




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
Standard					
M311067	Connector for C-profile 100 mm	Galvanised steel	175 x 98 x 27	10	1.5
M300118G	Hanger for C-profile 100 mm	"	98 x 97 x 24	100	8.4
M300144	Wall anchor for C-profile 100 mm	"	68 x 97 x 60	10	0.8
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
Optional					
M311205	Partition holder for C-profile 100 mm	Galvanised steel	102 x 35 x 65	10	0.4
M311210	Connector for C-profile 50 mm	"	175 x 48 x 27	10	1.0
M311211	Connector for C-profile 75 mm	"	175 x 73 x 27	10	1.3
M311068	Connector for C-profile 125 mm	"	175 x 122 x 27	10	1.7
M311212	Connector for C-profile 150 mm	"	175 x 148 x 27	10	1.9
M311213	Connector for C-profile 200 mm	"	175 x 198 x 27	10	2.4
M311214	Connector for C-profile 250 mm	"	175 x 248 x 27	10	2.9
M311215	Connector for C-profile 300 mm	"	175 x 298 x 27	10	3.4
M300217B	Hanger for C-profile 50 mm	"	98 x 54 x 24	10	0.6
M300218B	Hanger for C-profile 75 mm	"	98 x 72 x 24	10	0.6
M300219B	Hanger for C-profile 125 mm	"	98 x 122 x 24	10	1.2
M300220B	Hanger for C-profile 150 mm	"	98 x 147 x 24	10	1.6
M300221B	Hanger for C-profile 200 mm	"	98 x 197 x 24	10	2.3
M300222B	Hanger for C-profile 250 mm	"	98 x 247 x 24	10	3.0
M300223B	Hanger for C-profile 300 mm	"	98 x 297 x 24	10	3.8
M300224	Wall anchor for C-profile 50 mm	"	68 x 47 x 60	10	0.6
M300225	Wall anchor for C-profile 75 mm	"	68 x 72 x 60	10	0.8
M300226	Wall anchor for C-profile 125 mm	"	68 x 122 x 60	10	0.9
M300227	Wall anchor for C-profile 150 mm	"	68 x 147 x 60	10	1.1
M300228	Wall anchor for C-profile 200 mm	"	68 x 197 x 60	10	1.4
M300229	Wall anchor for C-profile 250 mm	"	68 x 247 x 60	10	1.7
M300230	Wall anchor for C-profile 300 mm	"	68 x 297 x 60	10	2.0
M300175	Bracket for hinge-down function Hook Pop-rivet TAPD 44 BS (for 1.6 - 3.2 mm gauge)	"	148 x 50 x 2	100	4.7
M311307		"	37	100	0.1

SYSTEM DRAWING

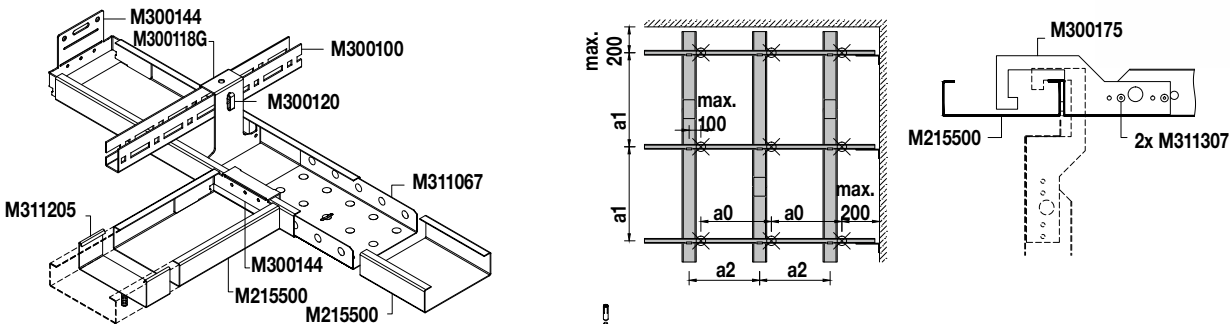

OPTIONAL SUSPENSION METHOD




SPACING PARAMETERS

a2 [mm]	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2600	2700	2800	2900	3000	3100	3200	3300
a0 [mm]	1800	1300	1400	1500	1600	1700	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	975	1000	1025	1050	1075	1100	1125	1150	1175	1200	1225	1250	1300	1350	1400	1450	1500	1550	1600	1650
a1 [mm]	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1850	1850	1800	1800	1750	1750	1700	1700	1650	1650	1650	1600	1600	1600	1600	1550	1550	1550	1550	1500	1500	1500	1500	1450	1450	1450	1400	1400	1400	1350	1300	1250	1200	1150	1100	1050	1050
a1* [mm]	1900	1900	1900	1900	1850	1800	1750	1700	1700	1700	1650	1650	1600	1600	1550	1550	1500	1500	1500	1450	1450	1400	1400	1350	1350	1300	1250	1250	1200	1150	1100	1100	1050	1050	1000	1000	950	950	900	900	850	800	800	750	750	700	

\* System with additional load + 4 kg/m²

SUSPENSION ACCESSORIES



Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
Nonius hanger option					
M300078	Nonius hanger for C-profile 100 mm	Galvanised steel	140 x 97 x 25	100	6.0
M300071	Nonius top part 200 mm		200 x 25 x 9	100	3.4
M300074	Nonius top part 500 mm		500 x 25 x 9	100	9.0
M300075	Nonius top part 700 mm		700 x 25 x 9	100	13.0
M300076	Nonius top part 1000 mm		1000 x 25 x 9	100	18.5
M300077	Nonius top part 1500 mm		1500 x 25 x 9	100	27.8
M300036	Nonius locking pin		65 x 24	100	0.7
M300013	Percussion dowel BZ 6 S		38 x 16	100	1.2



All measurements in millimeters. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



J-BAR

Concealed grid profile for installation with Metal R-H 200 system

Key Attributes

- Compatible with U-Profile Primary Grid System
- Alternative independent suspension options


Application area

Retail / Open plan offices / Laboratories / Transport / Exterior / Impact Resistance

Physical data


- Material: galvanised steel
- Surface finish: galvanised
- Colour: n/a

J-BAR

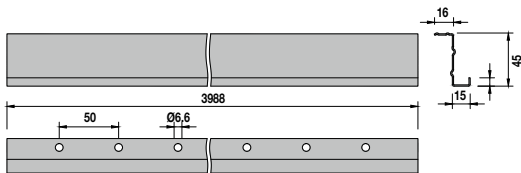


Item Nr.	Dimensions mm	Material	Content / Carton		Weight / Carton kg
			pcs	lm	
M300026	3988 x 45	Galvanised steel	10	40	25.2

ACCESSORIES & TOOLS

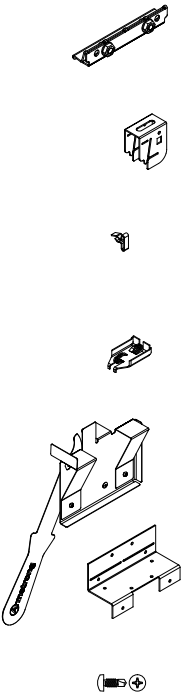


Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M300343	Connector for J-bar	Galvanised steel	120 x 22 x 20	100	9.5
M300307	Hanger for J-bar	"	62 x 40 x 47	100	3.8
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
M300216	Security clip (for R-H 200 system)	"	45 x 28 x 16	100	1.0
M300208	Extraction tool (for R-H 200 system)	Steel	110 x 105 x 49	1	0.1
M311218	Security bracket (for R-H 200 special solutions)	Galvanised steel	110 x 105 x 49	100	7.5
M311191	Self-drilling screw 3.5 x 9.5 mm	"	Ø3.5 x 9.5	100	0.1

OPTIONAL SUSPENSION ACCESSORIES



Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M300131	Direct hanger for J-bar	Galvanised steel	109 x 40 x 30	100	5.2

SYSTEM DRAWING

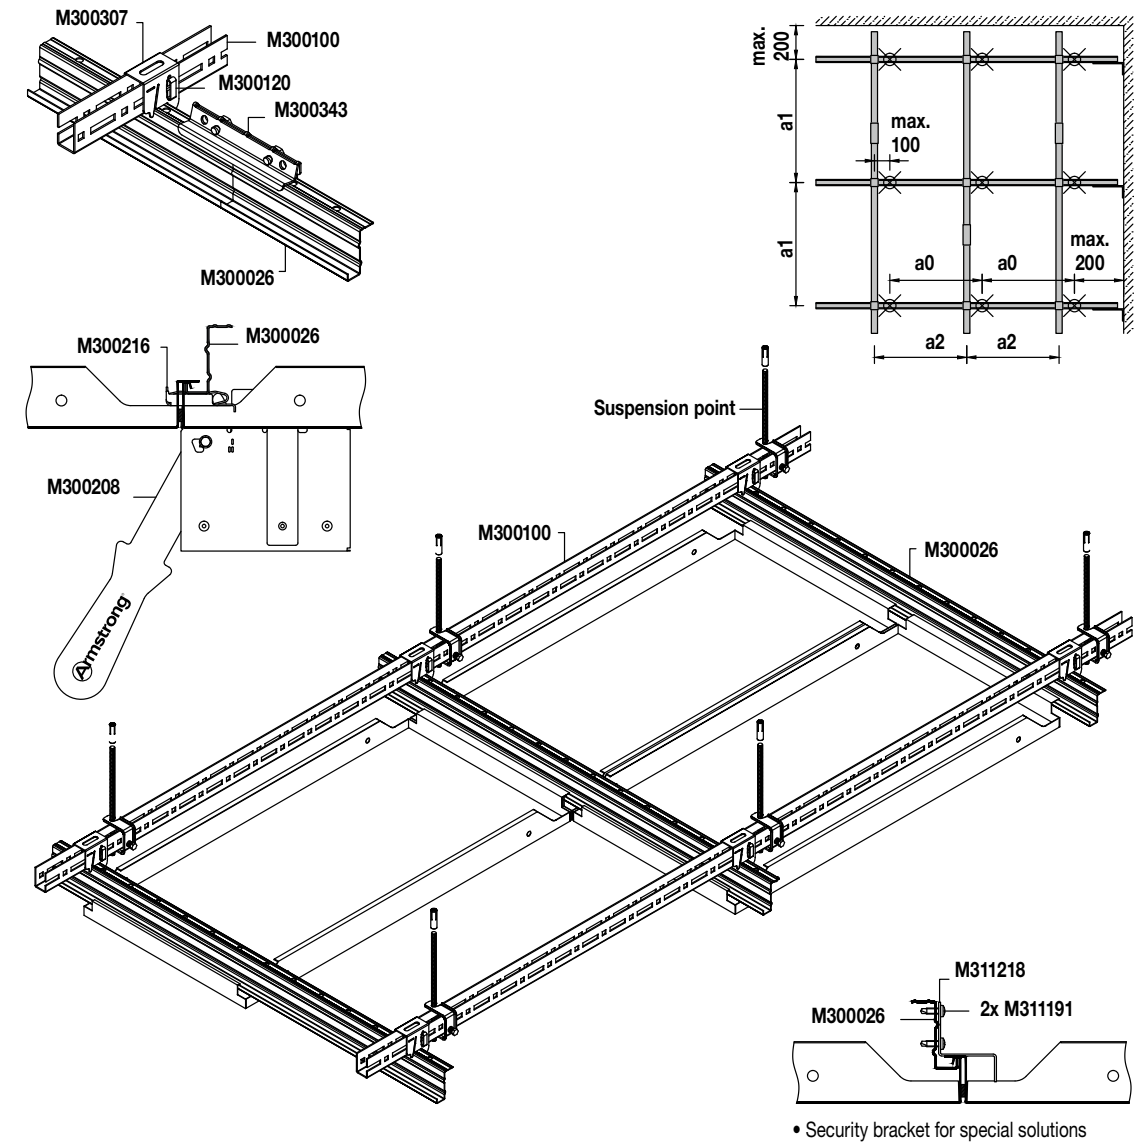


SPACING PARAMETERS

a2 [mm]	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2600	2700	2800	2900	3000	3100	3200	3300
a0 [mm]	1800	1300	1400	1500	1600	1700	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	975	1000	1025	1050	1075	1100	1125	1150	1175	1200	1225	1250	1300	1350	1400	1450	1500	1550	1600	1650
a1 [mm]	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1850	1850	1800	1800	1750	1750	1700	1700	1650	1650	1600	1600	1550	1550	1500	1500	1450	1450	1400	1400	1350	1300	1250	1250	1200	1150	1150	1100	
a1* [mm]	1900	1900	1900	1900	1900	1900	1900	1900	1850	1800	1800	1750	1750	1700	1650	1600	1600	1550	1500	1450	1450	1400	1350	1350	1300	1300	1250	1250	1200	1200	1150	1150	1100	1100	1050	1050	1050	1000	1000	950	950	900	850	850	800	800	750

\* System with additional load + 4 kg/m²


OPTIONAL SUSPENSION METHOD

Option 1



• Direct hanger

Option 2



All measurements in millimetres. All sizes are nominal.



# H-PROFILE

Concealed grid profiles for installation with Metal R-H 215

Key Attributes

- Compatible with U-Profile Primary Grid System
- Alternative independent suspension options
- Security bracket for secure installations


Application area

Retail / Open plan offices / Laboratories / Transport

Physical data


- Material: aluminium
- Colour: n/a

H-PROFILE

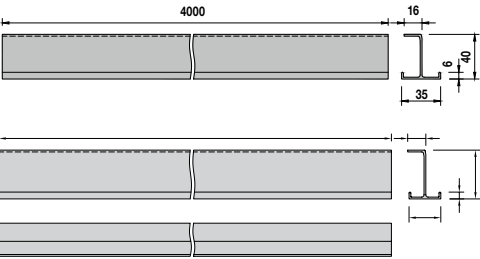

Item Nr.	Dimensions mm	Material	Content / Carton		Weight / Carton
			pcs	lm	kg
H-profile 35					
M311400D	4000 x 35 x 40	Aluminium	10	40	16.9

ACCESSORIES



Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M300343	Connector for H-profile	Galvanised steel	120 x 22 x 20	100	9.5



M300307	Hanger for H-profile	"	62 x 40 x 47	100	3.8
---------	----------------------	---	--------------	-----	-----




M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
---------	--------------	---	-------------	-----	-----




M300235	Security clip	Spring steel	42 x 18 x 22	100	0.7
---------	---------------	--------------	--------------	-----	-----

SUSPENSION ACCESSORIES



Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M300131	Direct hanger for H-profile 35	Galvanised steel	109 x 40 x 30	100	5.2

SYSTEM DRAWING

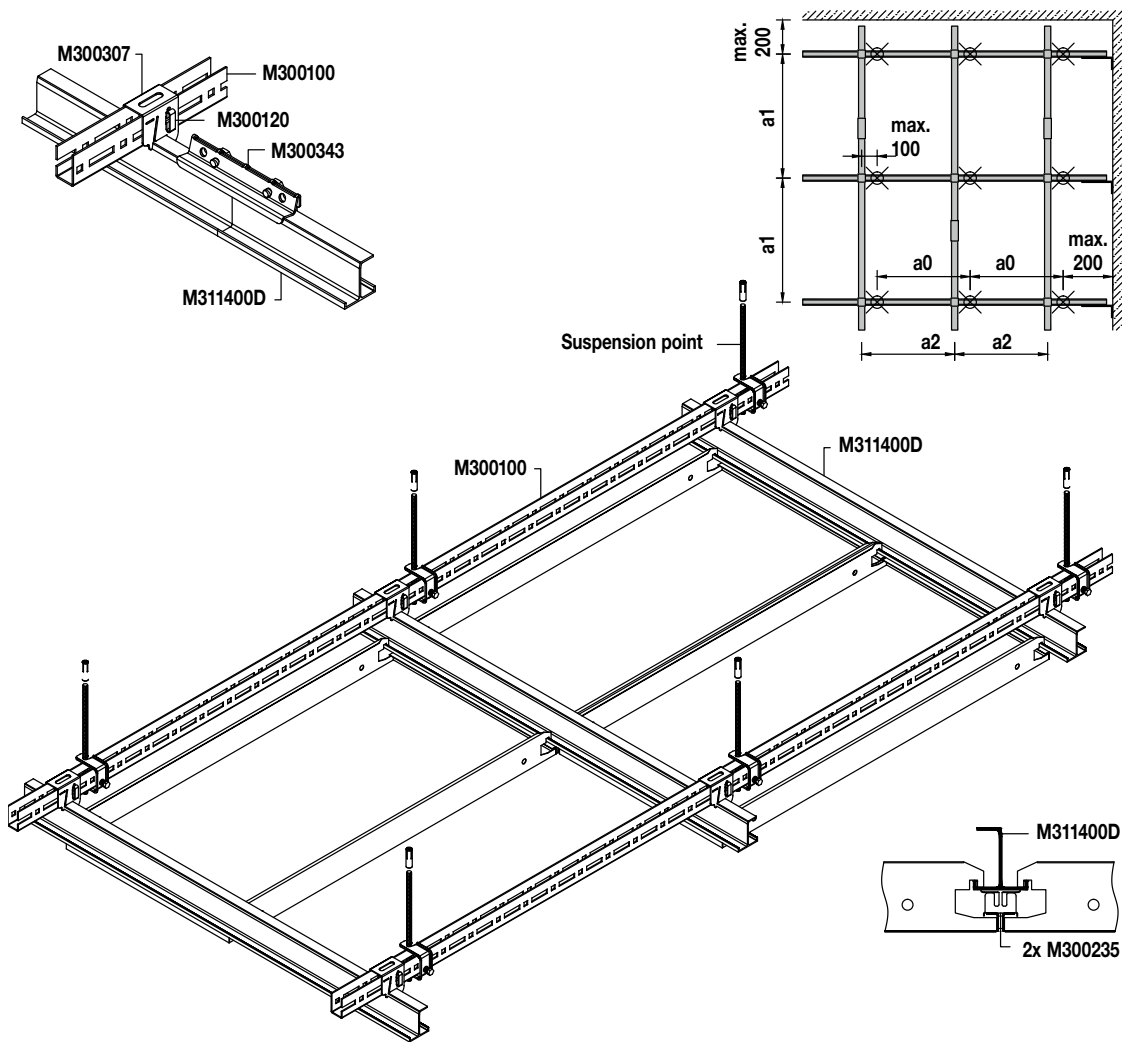


SPACING PARAMETERS

a2 [mm]	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2600	2700	2800	2900	3000	3100	3200	3300		
a0 [mm]	1800	1300	1400	1500	1600	1700	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	975	1000	1025	1050	1075	1100	1125	1150	1175	1200	1225	1250	1300	1350	1400	1450	1500	1550	1600	1650		
a1 [mm]	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1850	1850	1800	1800	1750	1750	1700	1700	1650	1650	1600	1600	1550	1550	1500	1500	1450	1450	1400	1400	1350	1300	1250	1250	1200	1150	1150	1100		
a1* [mm]	1700	1650	1600	1550	1550	1500	1450	1450	1400	1400	1400	1400	1350	1350	1300	1300	1300	1250	1250	1250	1200	1200	1200	1200	1150	1150	1150	1150	1150	1100	1100	1100	1100	1100	1100	1100	1050	1050	1050	1050	1050	1050	1000	1000	950	950	900	850	850

\* System with additional load + 4 kg/m²


OPTIONAL SUSPENSION METHOD

Option 1



• Direct hanger

Option 2



All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# C-PROFILE TARTAN

Exposed 100mm grid profile for installation with Metal K-H 400 system

Key Attributes

- Tartan grid layout
- Independent suspension using crossing boxes
- Brackets for hinge-down function and fixing partitions
- Special C-profile widths 70 - 300 mm available upon request


Application area

Retail / Open plan offices / Laboratories / Transport

Physical data

- Material: galvanised steel
- Surface finish: polyester powder painted
- Standard colour: RAL 9010
- Other colours available upon request


CROSSING-BOX & C-PROFILE



Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M215004	Crossing-box	Galvanised steel	100 x 100 x 80	1	0.3
Special	C-profile	"	L* x 100 x 30	1	-


\*Variable length up to 2850 mm

ACCESSORIES

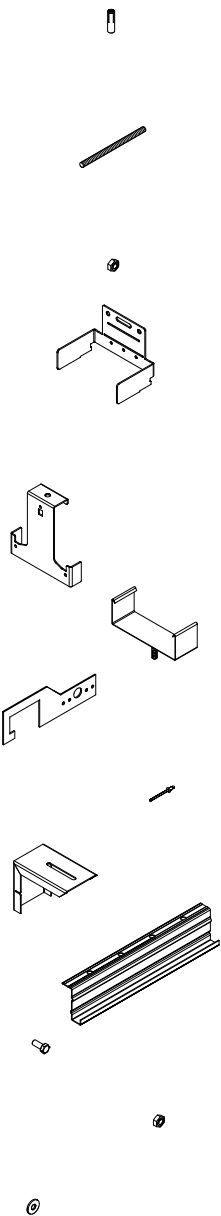


Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
Standard					
M311111	Expansion bolt M6 x 30 mm	Galvanised steel	M6 x 30	100	0.8
M311097	Threaded rod M6 x 500 mm	"	M6 x 500	100	8.4
M311099	Threaded rod M6 x 1000 mm	"	M6 x 1000	100	16.0
M311101	Threaded rod M6 x 2000 mm	"	M6 x 2000	100	32.0
M311103	Hexagonal nut M6	"	M6 x 5	100	0.3
M300144	Wall anchor for C-profile 100 mm	"	68 x 97 x 60	10	0.8
Optional					
M300118G	Hanger for C-profile 100 mm	Galvanised steel	98 x 97 x 24	100	8.4
M311205	Partition holder for C-profile 100 mm	"	102 x 35 x 65	10	0.4
M300175	Bracket for hinge-down function Hook	"	148 x 50 x 2	100	4.7
M311307	Pop-rivet TAPD 44 BS (for 1.6 - 3.2 mm gauge)	"	37	100	0.1
M311148	Holder for J-bar	"	85 x 66 x 50	10	1.0
M300026	J-bar	"	3988 x 45	10	25.2
M311303	Hexagonal bolt M6 x 16 mm	"	M6 x 16	100	0.5
M311103	Hexagonal nut M6	"	M6 x 5	100	0.3
M311305	Washer M6 18 x 1.6 mm	"	Ø18 x 1.6	100	0.3

SYSTEM DRAWING

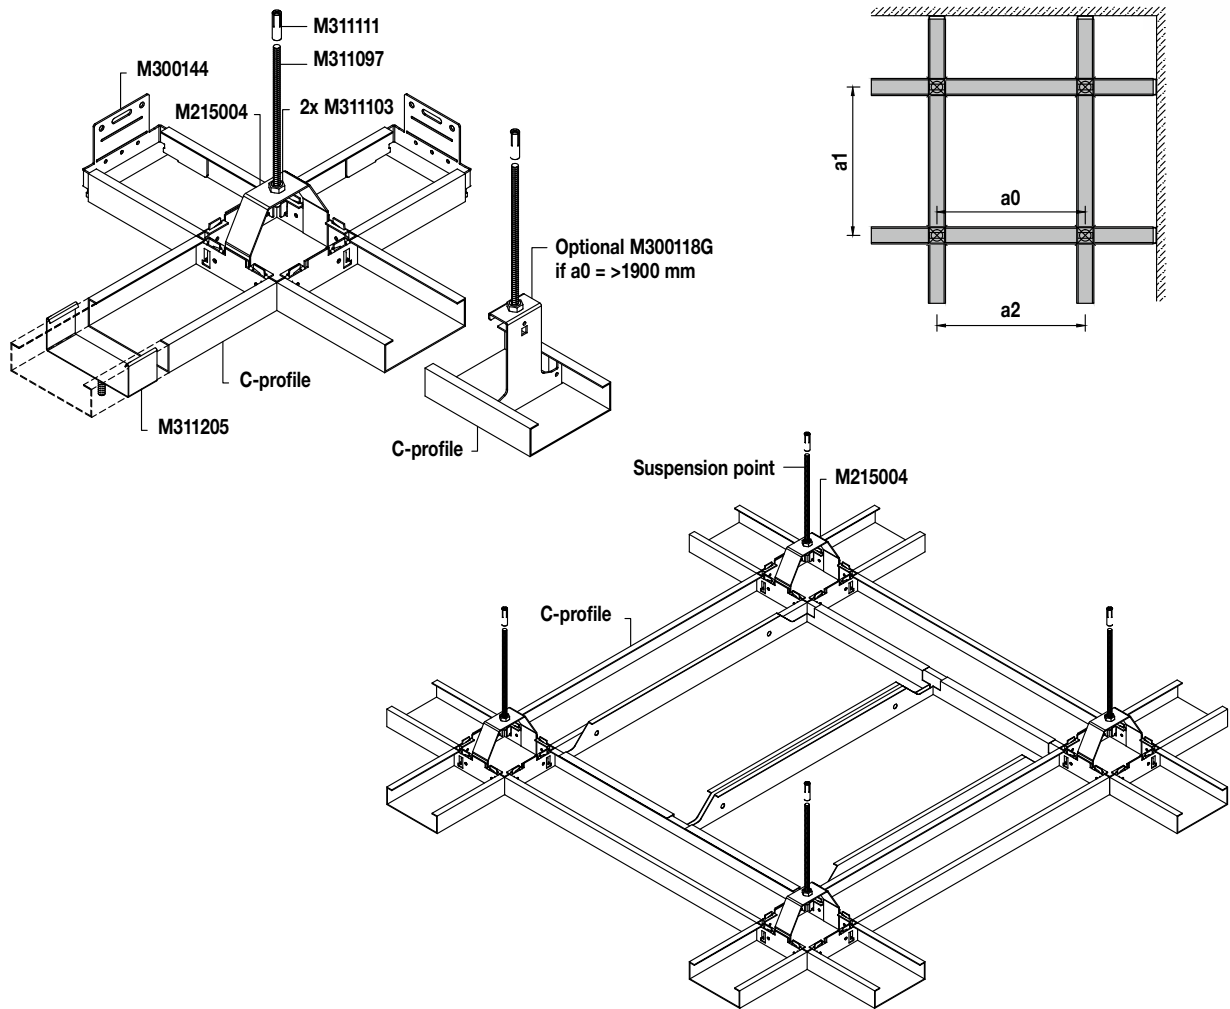

SUSPENSION METHODS

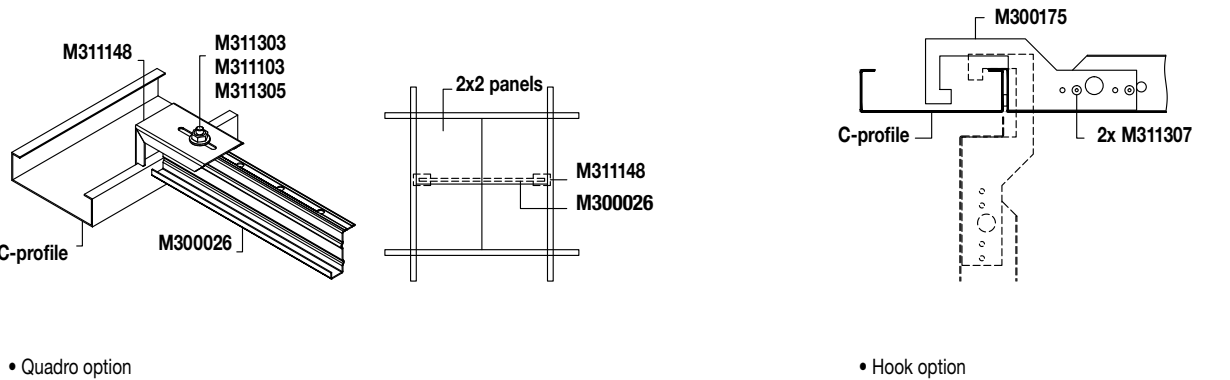

All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

L-PROFILE

Exposed 38mm grid profile for installation with Metal R-L 201 system

Key Attributes

- Compatible with U-Profile primary grid system
- Alternative independent suspension options
- Providing a slim Bandraster effect


Application area

Offices

Physical data


- Material: aluminium
- Surface finish: polyester powder painted
- Standard colour: RAL 9010
- Other colours available upon request

L-PROFILE

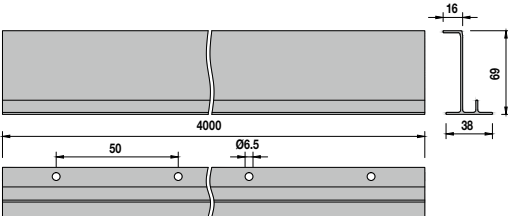


Item Nr.	Dimensions mm	Material	Content / Carton		Weight / Carton
			pcs	lm	kg
M215440	4000 x 69 x 38	Aluminium	10	40	22.6

ACCESSORIES




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M300343	Connector for L-profile	Galvanised steel	120 x 22 x 20	100	9.5
M300307	Hanger for L-profile	"	62 x 40 x 47	100	3.8
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2

SUSPENSION ACCESSORIES



Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M300131	Direct hanger for L-profile	Galvanised steel	109 x 40 x 30	100	5.2

SYSTEM DRAWING

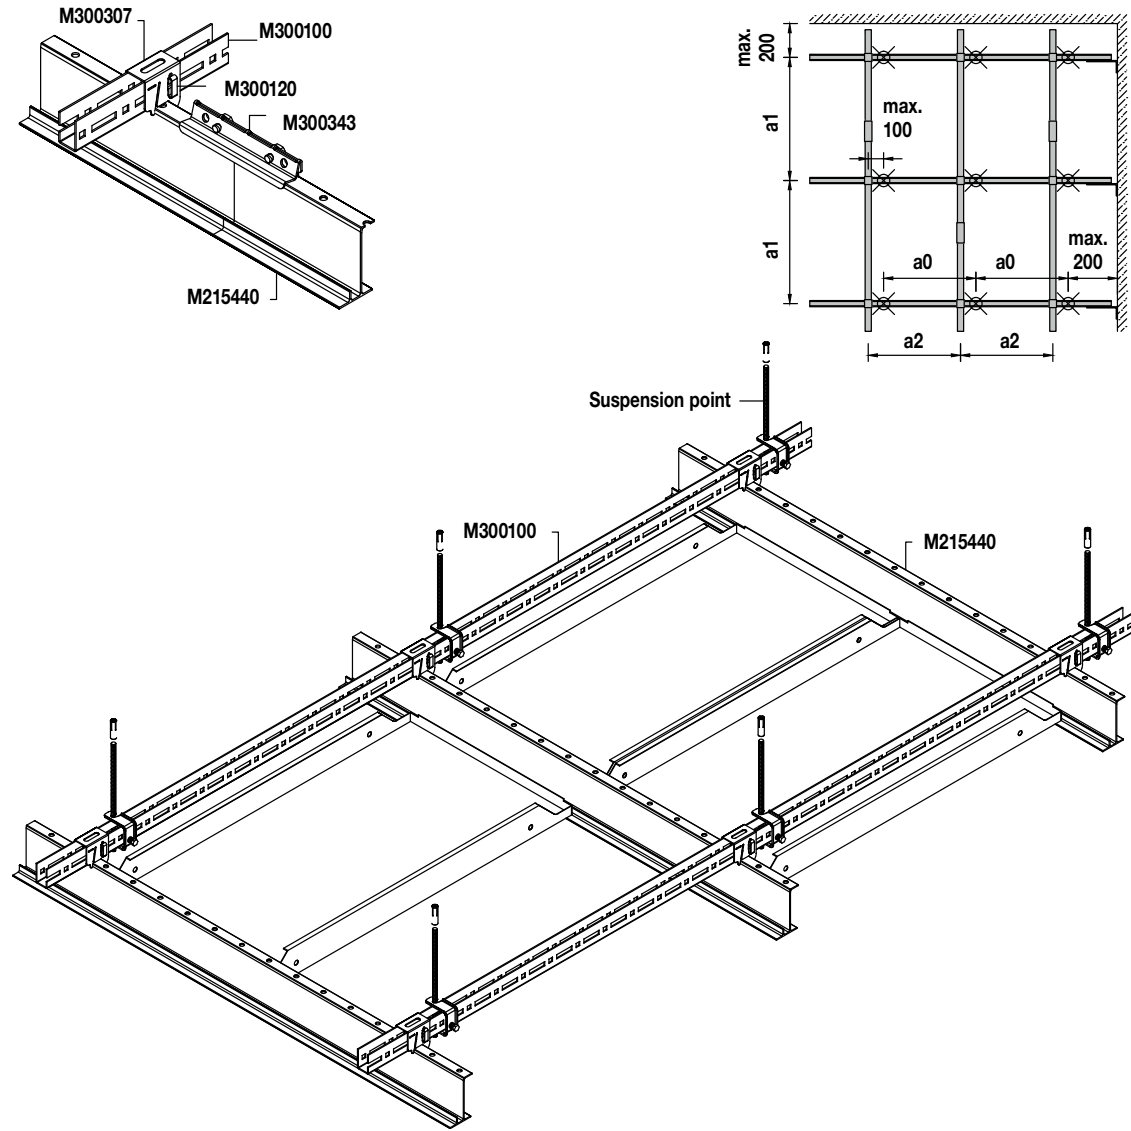

SPACING PARAMETERS

a2 [mm]	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2600	2700	2800	2900	3000	3100	3200	3300
a0 [mm]	1800	1300	1400	1500	1600	1700	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	975	1000	1025	1050	1075	1100	1125	1150	1175	1200	1225	1250	1300	1350	1400	1450	1500	1550	1600	1650
a1 [mm]	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1850	1850	1800	1800	1750	1750	1700	1700	1650	1650	1600	1600	1550	1550	1500	1500	1450	1450	1400	1400	1350	1300	1250	1250	1200	1150	1150	1100	
a1* [mm]	1900	1900	1900	1900	1900	1900	1900	1900	1850	1800	1800	1750	1750	1700	1650	1600	1600	1550	1500	1450	1450	1400	1350	1350	1300	1300	1250	1250	1200	1200	1150	1150	1100	1100	1050	1050	1050	1000	1000	950	950	900	850	850	800	800	750

\* System with additional load + 4 kg/m²

OPTIONAL SUSPENSION METHOD



- Direct hanger

All measurements in millimetres. All sizes are nominal.



Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# HALF DP12 A-BAR / J-BAR / G-PROFILE

Concealed grid profiles for installation with Metal F-Clip Access or F-H 600

Key Attributes

- Fixed by wall bracket to wall
- Swing-down options available


Application area

Corridor ceilings

Physical data


- Material: galvanised steel
- Surface finish: galvanised (half DP12 A-Bar / J-Bar), polyester powder painted (G-profile)
- Colour: RAL 9010 (G-profile)
- Other colours available upon request

HALF DP12 A-BAR FOR F-CLIP ACCESS




Item Nr.	Dimensions mm	Material	Content / Carton		Weight / Carton kg
			pcs	lm	
<b>Half DP12 A-Bar</b>					
M311149	4000 x 42 x 14	Galvanised steel	10	40	21.2

ACCESSORIES

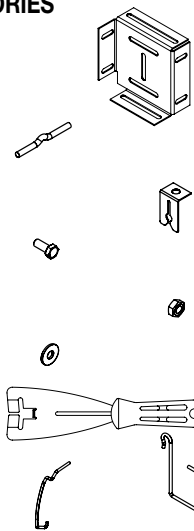


Item Nr.	Description	Material	Dimensions mm	Content / Carton		Weight / Carton kg
				pcs	lm	
M311007BK	Wall bracket (black e-coated)	Galvanised steel	100 x 100 x 59	10		2.0
M300138	Connection pin for DP12 A-Bar	"	60 x 5	100		0.8
M300209	Hanger for DP12 A-Bar	"	31 x 15 x 20	100		0.6
M311303	Hexagonal bolt M6 x16 mm	"	M6 x 16	100		0.5
M311103	Hexagonal nut M6	"	M6 x 5	100		0.3
M311305	Washer M6 18 x1.6 mm	"	Ø18 x 1.6	100		0.3
M311028	Extraction tool	Steel	228 x 60 x 21	1		0.1
M300189	Swing-down bracket for Access function	Galvanised steel	62 x 45	100		0.7
M300106	Security clip	"	54 x 40	100		0.2

J-BAR & G-PROFILE FOR F-H 600

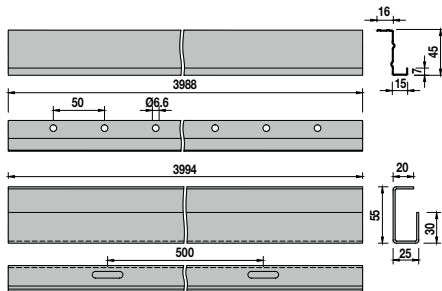


Item Nr.	Dimensions mm	Material	Content / Carton		Weight / Carton kg
			pcs	lm	
<b>J-bar</b>					
M300026	3988 x 45	Galvanised steel	10	40	25.2
<b>G-profile (for Swing option)</b>					
M300171	3994 x 55 x 25	"	4	16	33.4

ACCESSORIES

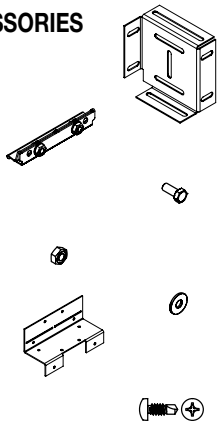

Item Nr.	Description	Material	Dimensions mm	Content / Carton		Weight / Carton kg
				pcs	lm	
M311007BK	Wall bracket (black e-coated)	Galvanised steel	100 x 100 x 59	10		2.0
M300343	Connector for J-bar	"	120 x 22 x 20	100		9.5
M311303	Hexagonal bolt M6 x16 mm	"	M6 x 16	100		0.5
M311103	Hexagonal nut M6	"	M6 x 5	100		0.3
M311305	Washer M6 18 x1.6 mm	"	Ø18 x 1.6	100		0.3
M311218	Security bracket (for J-bar)	"	100 x 52 x 38	100		7.5
M311191	Self-drilling screw 3.5 x 9.5 mm	"	Ø3.9 x 13	100		0.1

F-CLIP ACCESS SYSTEM DRAWING

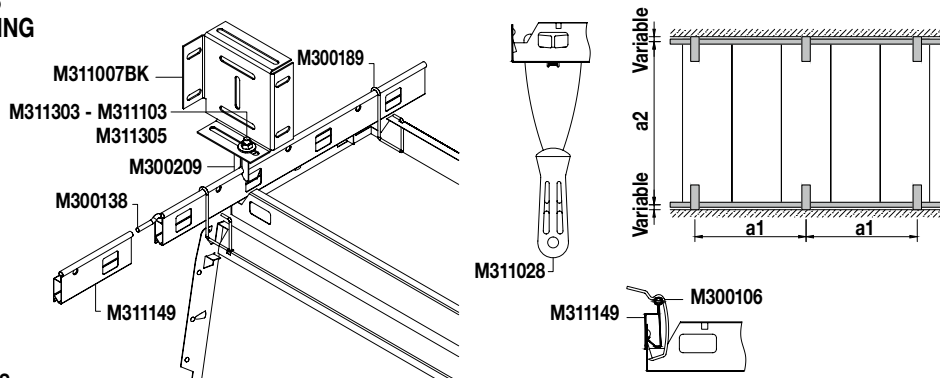


SPACING PARAMETERS

a2 [mm]	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500
a1 [mm]	1650	1600	1600	1550	1550	1500	1500	1500	1450	1450	1400	1400	1400	1400	1350	1350	1350	1350	1300	1300	1300	1300	1250	1250	1250	1250	1200	1200	1200	1200	1200
a1* [mm]	1400	1400	1350	1350	1350	1300	1300	1250	1250	1250	1250	1200	1200	1200	1200	1150	1150	1150	1150	1100	1100	1100	1100	1100	1100	1050	1050	1050	1050	1050	1050

\* System with additional load + 4 kg/m²

F-H 600 SYSTEM DRAWING

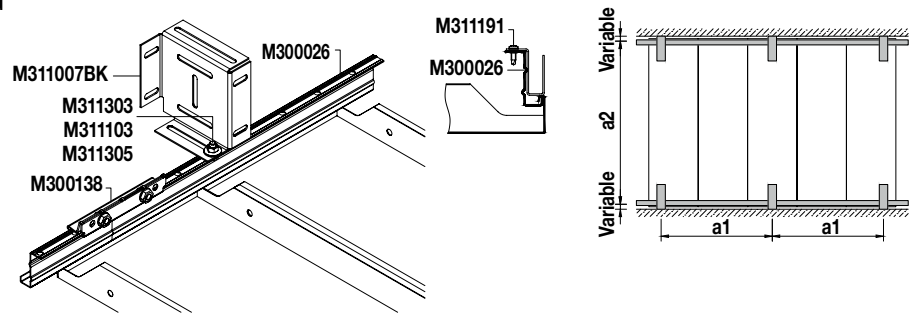


SPACING PARAMETERS

a2 [mm]	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2600	2700	2800	2900	3000	3100	3200	3300
a1 [mm]	1900	1900	1900	1900	1900	1900	1900	1900	1900	1850	1800	1800	1800	1750	1750	1750	1700	1700	1700	1650	1650	1600	1600	1550	1550	1500	1500	1450	1450	1400	1400	1350	1300	1250	1250	1200	1150	1150	1100
a1* [mm]	1850	1800	1800	1750	1700	1650	1600	1600	1550	1500	1450	1450	1400	1350	1350	1300	1300	1250	1250	1200	1200	1150	1150	1100	1100	1050	1050	1050	1000	1000	950	950	900	850	850	800	800	750	

\* System with additional load + 4 kg/m²

F-H 600 SWING SYSTEM DRAWING

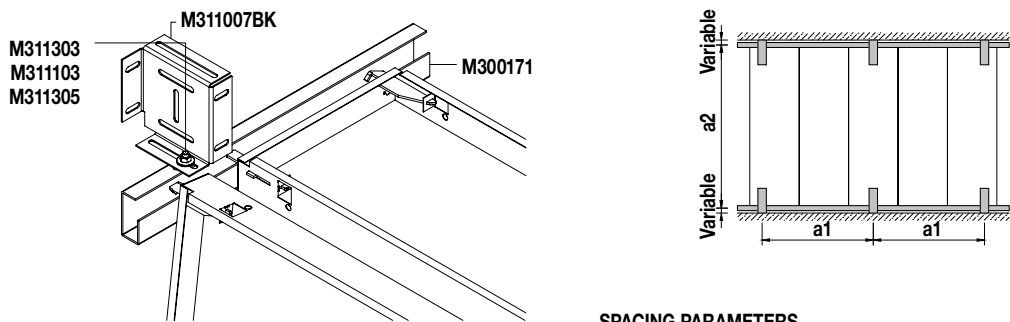

SPACING PARAMETERS

a2 [mm]	3300
a1 [mm]	1000
a1* [mm]	500

\* System with additional load + 4 kg/m²



All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# METAL BAFFLES / V-P 500 / V-K 500

Suspension components and accessories for the Armstrong range of Metal Baffles

## Key Attributes

- Metal Baffles: independent cable suspension system and accessories
- V-P 500: hangers, brackets and accessories of installation with U-Profile primary grid system
- V-K 500: direct suspension system and accessories for a Tartan Baffles layout

## Application area

Retail / Open plan offices / Transport

## Physical data


- Material: galvanised steel
- Surface finish: polyester powder painted / galvanised
- Colour: RAL 9010 or Black / n/a
- Other colours available upon request

## METAL BAFFLES ACCESSORIES




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
CS5136	Metal Baffles hanging kit	Galvanised steel	2000	4	0.2
M300371BK	Connector for vertical Baffles 300 mm***	"	28 x 292 x 30	1	0.2
M300375	Face cover for vertical Baffles 300 mm*	"	29 x 299 x 8	1	0.1

## V-P 500 ACCESSORIES




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M300367BZC	Hanger for vertical Baffles**	Galvanised steel	52 x 36 x 20	100	1.4
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
M311044	Distance holder for vertical Baffles	Spring steel	50 x 20	100	0.3
M300368BK	Connector for vertical Baffles 150 mm***	Galvanised steel	28 x 142 x 30	1	0.1
M300369BK	Connector for vertical Baffles 200 mm***	"	28 x 192 x 30	1	0.1
M300370BK	Connector for vertical Baffles 250 mm***	"	28 x 242 x 30	1	0.1
M300371BK	Connector for vertical Baffles 300 mm***	"	28 x 292 x 30	1	0.2
M300372	Face cover for vertical Baffles 150 mm*	"	29 x 149 x 8	1	0.1
M300373	Face cover for vertical Baffles 200 mm*	"	29 x 199 x 8	1	0.1
M300374	Face cover for vertical Baffles 250 mm*	"	29 x 249 x 8	1	0.1
M300375	Face cover for vertical Baffles 300 mm*	"	29 x 299 x 8	1	0.1

## V-K 500 ACCESSORIES




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
M311111	Expansion bolt M6 x 30 mm	Galvanised steel	M6 x 30	100	0.8
M311097	Threaded rod M6 x 500 mm	"	M6 x 500	100	8.4
M311099	Threaded rod M6 x 1000 mm	"	M6 x 1000	100	16.0
M311101	Threaded rod M6 x 2000 mm	"	M6 x 2000	100	32.0
M311103	Hexagonal nut M6	"	M6 x 5	100	0.3
M311040	Coupling holder for vertical Baffles	"	50 x 18 x 10	100	1.3
M311041	Corner coupling holder for vertical Baffles	"	31 x 18 x 10	100	0.8
M311042	Coupling clamp for vertical Baffles	"	40 x 18 x 6	100	0.7
M311043	Corner coupling clamp for vertical Baffles	"	62 x 26 x 6	100	1.4
M311085	Hexagonal bolt M6 x 25 mm	"	M6 x 25	100	0.7
M311044	Distance holder for vertical Baffles	Spring steel	50 x 20	100	0.3
M311039	Grip 30 mm for vertical Baffles	"	30 x 8 x 16	100	0.2
M311307	Pop-rivet TAPD 44 BS (for 1.6 - 3.2 mm gauge)	Galvanised steel	37	100	0.1

## METAL BAFFLES SYSTEM DRAWING





## V-P 500 SYSTEM DRAWING

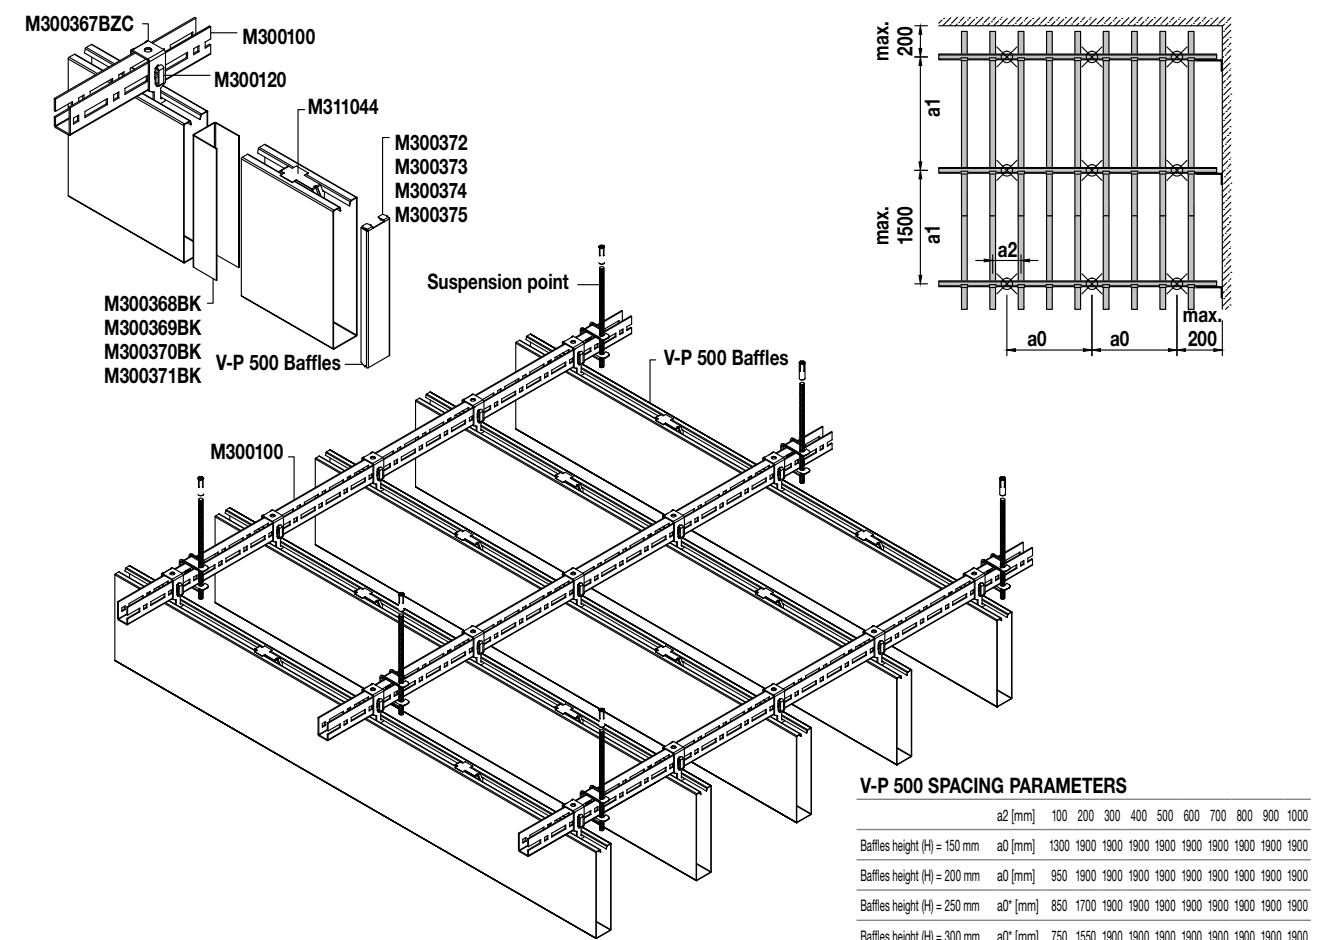

## V-K 500 SYSTEM DRAWING

### V-K 500 SPACING PARAMETERS

a2 [mm]	100	250	500	750	1000
a0 [mm]	500	750	1000	1500	1500

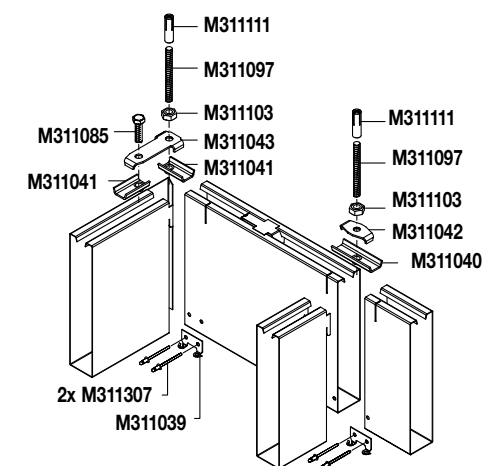

\* Standard RAL 9010 on visible side, further RAL / NCS colours on request.  
 \*\* Black zinc coated item. \*\*\* RAL 9005 black.  
 All measurements in millimetres. All sizes are nominal.



Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# OPTIMA BAFFLES & CANOPY RANGE

Suspension components and accessories for floating ceilings.

## Key Attributes

- Optima Baffles: independent cable suspension system and accessories for grouped and aligned installation
- Optima L & Optima Curved Canopy: independent cable suspension system
- Optima Canopy: independent cable suspension system and brackets for single suspension or grouping frame option


## Application area

Reception areas / Meeting areas / Circulation spaces / Retail

## Physical data

- Galvanised steel components, Aluminium frames
- Surface finish: galvanised (steel)
- Colour: Black & Global White Aluminium frames

## OPTIMA BAFFLES ACCESSORIES

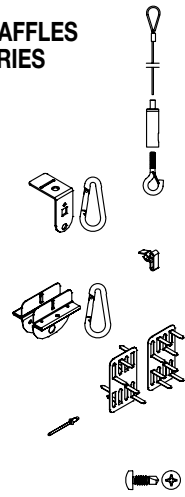


Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
CS5135	Hanging wire kit	Galvanised steel	2000	4	0.2
CS5547BZC	U-profile hanging kit*	"	38 x 22 x 40	12	0.3
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
CS5548BZC	Prelude 24 hanging kit*	"	12 x 50 x 40	12	0.5
CS5549	Optima Baffles connector kit	"	60 x 35	10	0.2
M311307	Pop-rivet TAPD 44 BS (for 1.6 - 3.2 mm gauge)	"	37	100	0.1
M311191	Self-drilling screw 3.5x9.5 mm	"	Ø3.5 x 9.5	100	0.1

## OPTIMA L CANOPY ACCESSORIES




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
CS4979	Basic spiral anchor hanging kit	Galvanised steel	2000	4	0.1

## OPTIMA CURVED CANOPY ACCESSORIES




CS6636	Premium spiral anchor hanging kit	Galvanised steel	4877	4	0.2
--------	-----------------------------------	------------------	------	---	-----

## OPTIMA CANOPY GRID & ACCESSORIES




Item Nr.	Dimensions mm	Material	Content / Carton pcs	Content / Carton lm	Weight / Carton kg
CS5451	3658 x 26 x 26	Aluminium (black)	4	14.6	4.1
CS5451WG	3658 x 26 x 26	Aluminium (Global White)	4	14.6	4.1

## ACCESSORIES & TOOLS

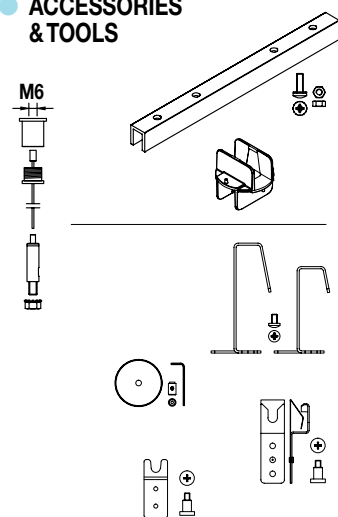


Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
CS5452	Frame splice kit (black)	Aluminium	254 x 18 x 22	2	0.3
CS5452WG	Frame splice kit (Global White)	"	254 x 18 x 22	2	0.3
CS5453	Frame alignment kit	Plastic	Ø63 x 57	4	0.2
CS5450	Deck hanging kit	Galvanised steel	2438	4	0.1
CS5454	Panel hook kit (black)	Aluminium	-	2	0.2
CS5454WG	Panel hook kit (Global White)	"	-	2	0.2
CS5047A	Escutcheon hanging kit (white)	Galvanised steel	Ø48 x 5	2	0.1
CS5455	Drywall hanging kit	"	91 x 26 x 21	2	0.1
CS5588	Wall hanging kit	"	64 x 25 x 6	4	0.1


## OPTIMA BAFFLES SYSTEM DRAWING

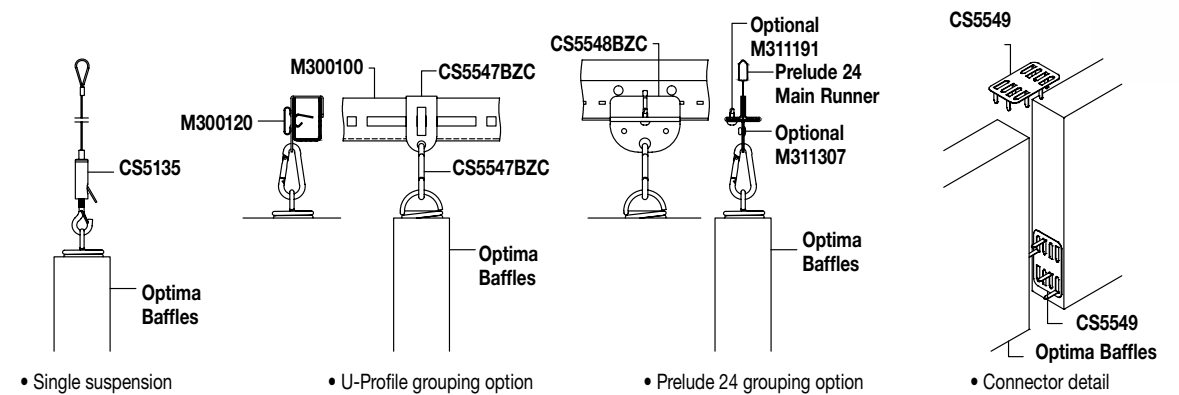



## OPTIMA L CANOPY SYSTEM DRAWING

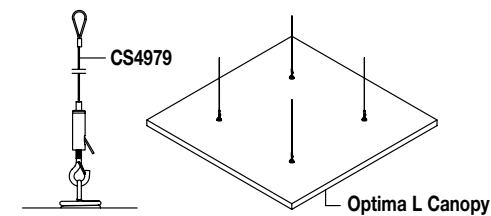

## OPTIMA CURVED CANOPY SYSTEM DRAWING

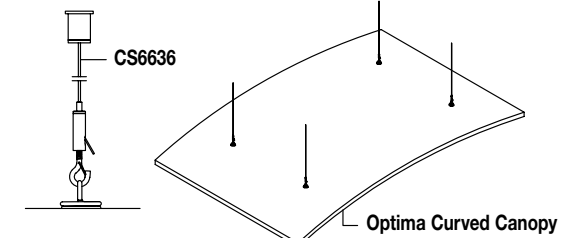

## OPTIMA CANOPY SYSTEM DRAWING

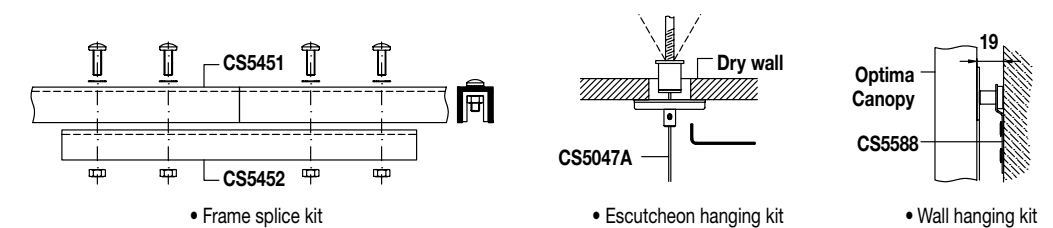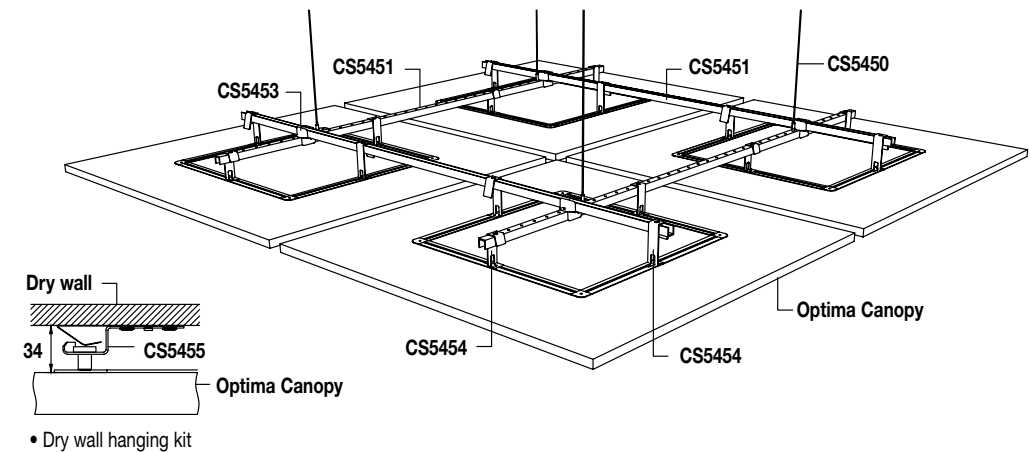

All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# METAL CANOPY / EASY CANOPY

Suspension components and accessories for the Armstrong range of metal canopies

## Key Attributes

- Metal Canopy & Easy Canopy: Independent cable suspension system and accessories for flat, convex or concave canopies
- D-Clip system: hangers, brackets and accessories for installation of D-Clip panels using U-Profile primary grid system and DP12 A-Bar
- D-H 700: hangers, brackets and accessories for installation of D-H 700 panels using the U-Profile primary grid system


## Application area

Reception areas / Meeting areas /  
Circulation spaces / Retail

## Physical data


- Material: galvanised steel
- Surface finish: galvanised
- Colour: n/a

## METAL & EASY CANOPY ACCESSORIES



Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
CS5550	Metal & Easy Canopy hanging kit	Galvanised steel	4000	4	0.5

## D-CLIP GRID & ACCESSORIES



Item Nr.	Dimensions mm	Material	Content / Carton pcs	Weight / Carton kg
<b>DP12 A-Bar</b>				
M311022	4000 x 40 x 16	Galvanised steel	10	21.3


Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
<b>Accessories</b>					
M300138	Connection-pin for DP12 A-Bar	Galvanised steel	60 x 5	100	0.8
M311023	Connector for DP12 A-Bar	"	100 x 17 x 15	100	2.0
M300105D	Hanger for DP12 A-Bar	"	52 x 20 x 4	100	0.6
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
M311028	Extraction tool	Steel	228 x 60 x 21	1	0.1
M300188	Swing-down bracket for Access function	Galvanised steel	62 x 54	100	0.7
M300106	Security clip	"	54 x 40	100	0.2

## D-H 700 ACCESSORIES




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	Weight / Carton kg
<b>Accessories</b>					
M315710	Cross-connector for U-profile	Galvanised steel	92 x 69 x 28	50	3.5
M311195	Thread cutting screw M6x10 mm	"	M6 x 10	100	0.5
M300120	Plug-in clip	"	20 x 21 x 6	100	0.2
M315711	Security bracket H = 50 mm	"	70 x 48	100	2.5
M315712	Security bracket H = 65 mm (optional for chilled ceiling application)	"	70 x 63	100	2.8

## METAL & EASY CANOPY SYSTEM DRAWING







METAL CANOPY



EASY CANOPY

## D-CLIP SYSTEM DRAWING

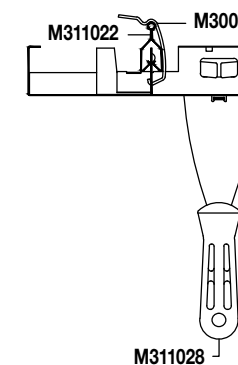
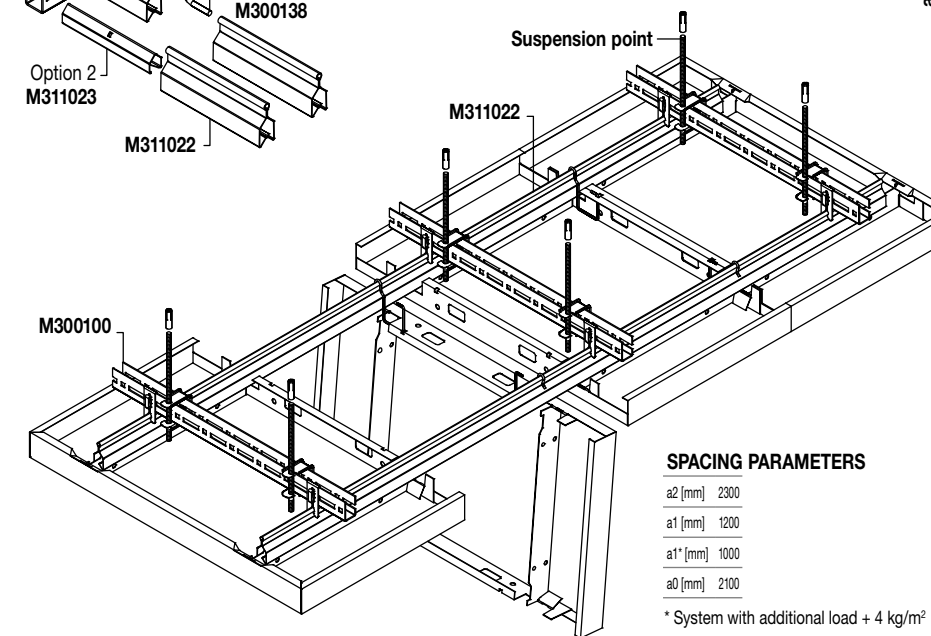



### SPACING PARAMETERS

a2 [mm]	2300
a1 [mm]	1200
a1* [mm]	1000
a0 [mm]	2100

\* System with additional load + 4 kg/m²

## D-H 700 SYSTEM DRAWING

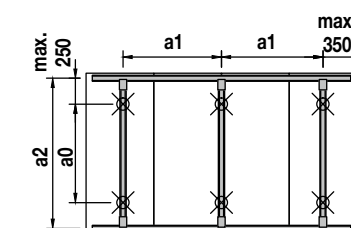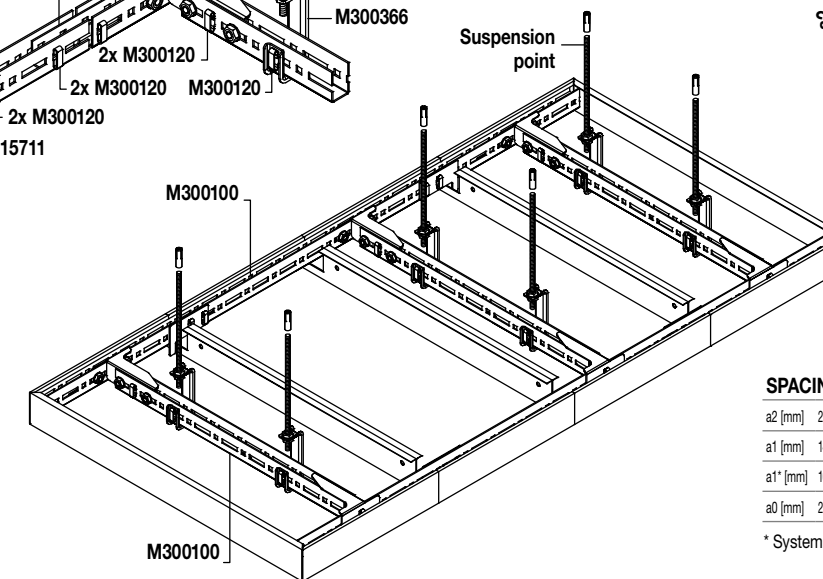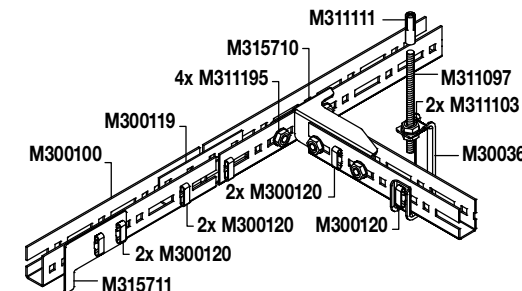

### SPACING PARAMETERS

a2 [mm]	2728 (in steps of 25 mm)
a1 [mm]	1400
a1* [mm]	1000
a0 [mm]	2478

\* System with additional load + 4 kg/m²



All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# AXIOM C CANOPY

Floating ceiling suspension kits using 112mm AXIOM Profile frame to create ceiling clouds

Key Attributes

- Made-to-measure components and accessories all in a single box, ready-to-install for quick and easy installation
- Available in 10 standard modules with either Prelude 15 or Prelude 24 grid for installation with full size ceiling tiles
- Corner posts for high quality corner detailing










Application area


Reception areas / Meeting areas / Circulation spaces / Retail

Physical data

- Material: aluminium / galvanised steel
- Surface finish: polyester powder painted
- Colour: Global White
- Other colours available upon request

AXIOM C CANOPY COMPONENTS

Item Nr.	Description
	55 14 11 G AXIOM Vector MicroLook Tegular Profile
	C 3000 H C Channel 19 x 38mm
	A WDN 21 H T bar hanger
	Cut to size Main Runner 600 mm XL <sup>2</sup> Cross Tees
	A 345 G AXIOM Vector MicroLook Tegular Profile corner post
	A 348 G Channel bracket
	CA 97 H Clamp for C channel
	A 347 G 24 mm XL <sup>2</sup> connector clip
	A 346 G 15 mm XL <sup>2</sup> connector clip
	A 339 H AXIOM Universal T bar connector clip for cut tees with screws

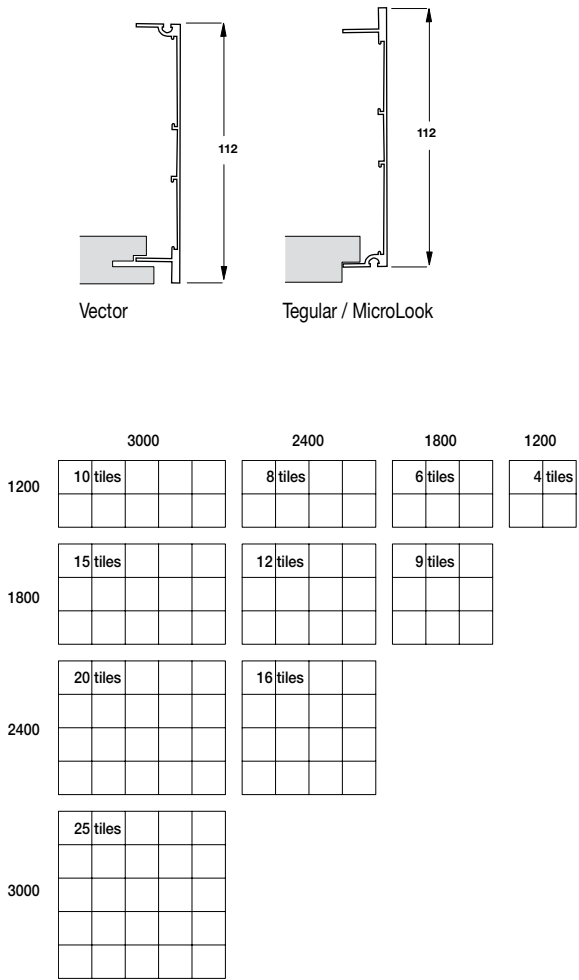

AXIOM C CANOPY KITS\*

Module	Grid system 15 mm XL <sup>2</sup> Item Nr.	Grid system 24 mm XL <sup>2</sup> Item Nr.
1200 x 1200 mm	AX 22 G15	AX 22 G24
1800 x 1200 mm	AX 32 G15	AX 32 G24
1800 x 1800 mm	AX 33 G15	AX 33 G24
2400 x 1200 mm	AX 42 G15	AX 42 G24
2400 x 1800 mm	AX 43 G15	AX 43 G24
2400 x 2400 mm	AX 44 G15	AX 44 G24
3000 x 1200 mm	AX 52 G15	AX 52 G24
3000 x 1800 mm	AX 53 G15	AX 53 G24
3000 x 2400 mm	AX 54 G15	AX 54 G24
3000 x 3000 mm	AX 55 G15	AX 55 G24

\*Ceiling tiles are NOT included in the kit.


RECOMMENDATIONS

AXIOM C Canopy should always be installed in accordance with all applicable building codes and regulations.

- AXIOM C Canopy should only be installed on a horizontal plane. They are not approved for exterior installations.
- AXIOM C Canopy should always be installed by a minimum of 2 people.
- Read the installation instructions included in the carton carefully before starting the installation.
- Make sure the installation is clean and safe.
- Any additional weights (such as luminaires...) must be independently suspended from the soffit.
- Aircraft cables are included as a standard in the kit but if you require more lateral restraint, we would recommend the use of 6 mm threaded rod or provide diagonal bracing.

SYSTEM DRAWING

The 1800 mm x 3000 mm module is used as an example only. An installation instruction guide is available. Please contact Armstrong Technical Sales for further details.

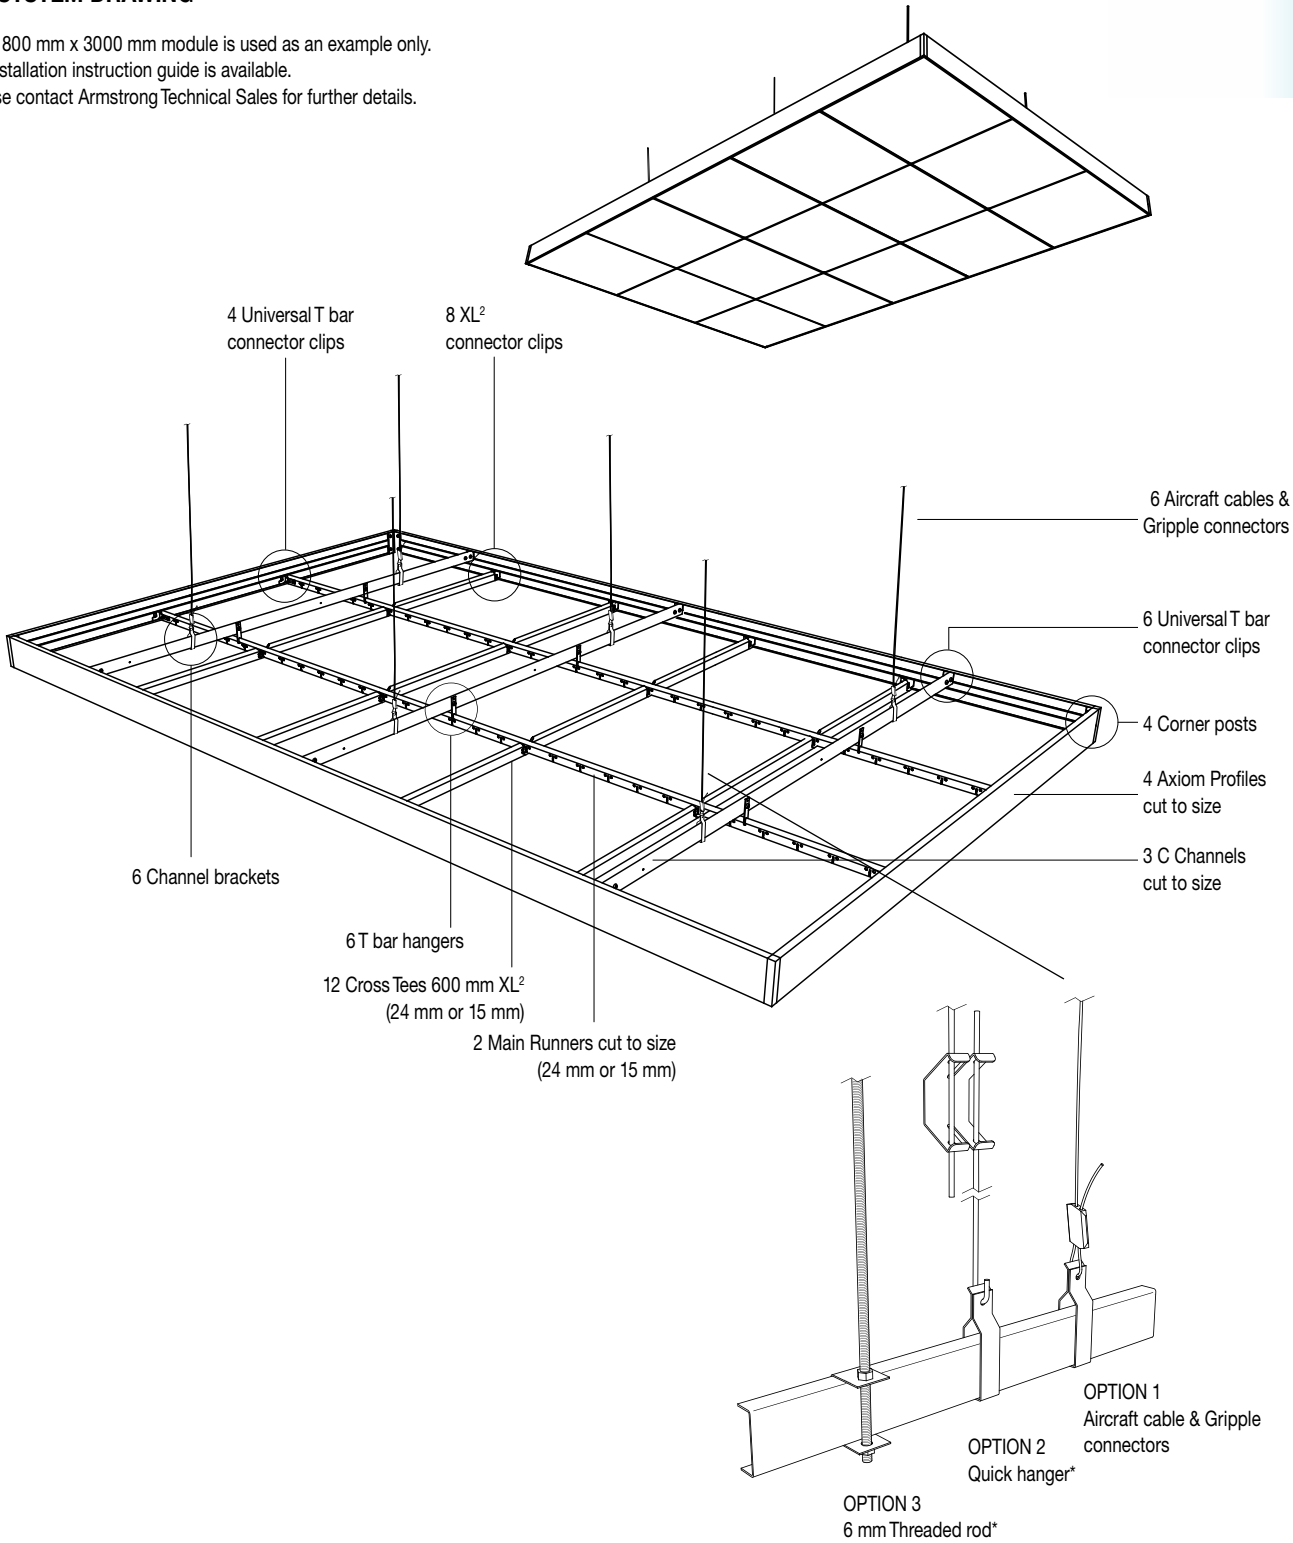

\* not included in the kit



All canopies available in Global White. For any other colours, please contact Armstrong Technical Sales. All measurements in millimeters. All sizes are nominal

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# AXIOM C CANOPY SL2 PLANKS

Floating ceiling suspension kits using 112mm AXIOM Profile frame to create ceiling clouds

Key Attributes

- Made-to-measure components and accessories all in a single box, ready-to-install for quick and easy installation
- Available in 6 standard modules with Z-Bars for installation with full size SL2 ceiling planks
- Corner posts for high quality corner detailing









Application area


Reception areas / Meeting areas / Circulation spaces / Retail

Physical data

- Material: aluminium / galvanised steel
- Surface finish: polyester powder painted
- Colour: Global White
- Other colours available upon request

AXIOM C CANOPY SL2 PLANKS COMPONENTS

Item Nr.	Description
	55 14 11 G AXIOM C Canopy Profile
	C 3000 H C Channel 19 x 38 mm
	CZ 41 494 J Z-bar 30.5 mm x 1500 mm
	CZ 41 794 J Z-bar 30.5 mm x 1800 mm
	A 345 G AXIOM Vector MicroLook Tegular Profile corner post
	A 348 G Channel Bracket for Canopy
	CA 97 H Clamp for C channel
	A 339 H AXIOM Universal T bar connector clip for cut tees with screws

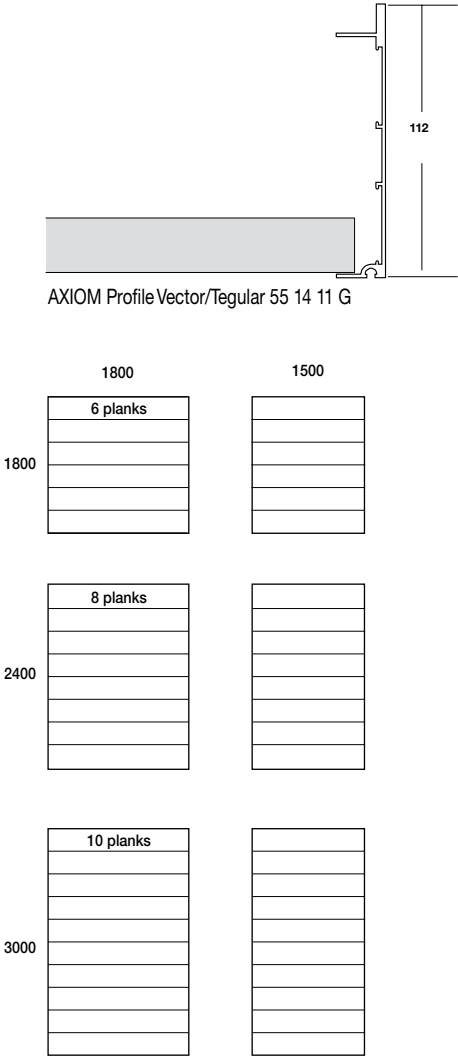

AXIOM C CANOPY SL2 PLANKS KITS\*

Module	Item Nr.
1800 x 1500 mm	AX 22 36G SL2
2400 x 1500 mm	AX 22 46G SL2
3000 x 1500 mm	AX 22 56G SL2
1800 x 1800 mm	AX 22 33G SL2
2400 x 1800 mm	AX 22 43G SL2
3000 x 1800 mm	AX 22 53G SL2

\*SL2 Planks are NOT included in the kit.


RECOMMENDATIONS

AXIOM C Canopy should always be installed in accordance with all applicable building codes and regulations.

- AXIOM C Canopy should only be installed on a horizontal plane. They are not approved for exterior installations.
- AXIOM C Canopy should always be installed by a minimum of 2 people.
- Read the installation instructions included in the carton carefully before starting the installation.
- Make sure the installation is clean and safe.
- Any additional weights (such as luminaires...) must be independently suspended from the soffit.
- Aircraft cables are included as a standard in the kit but if you require more lateral restraint, we would recommend the use of 6 mm threaded rod or provide diagonal bracing.

SYSTEM DRAWING

The 1800 mm x 3000 mm module is used as an example only. An installation instruction guide is available. Please contact Armstrong Technical Sales for further details.

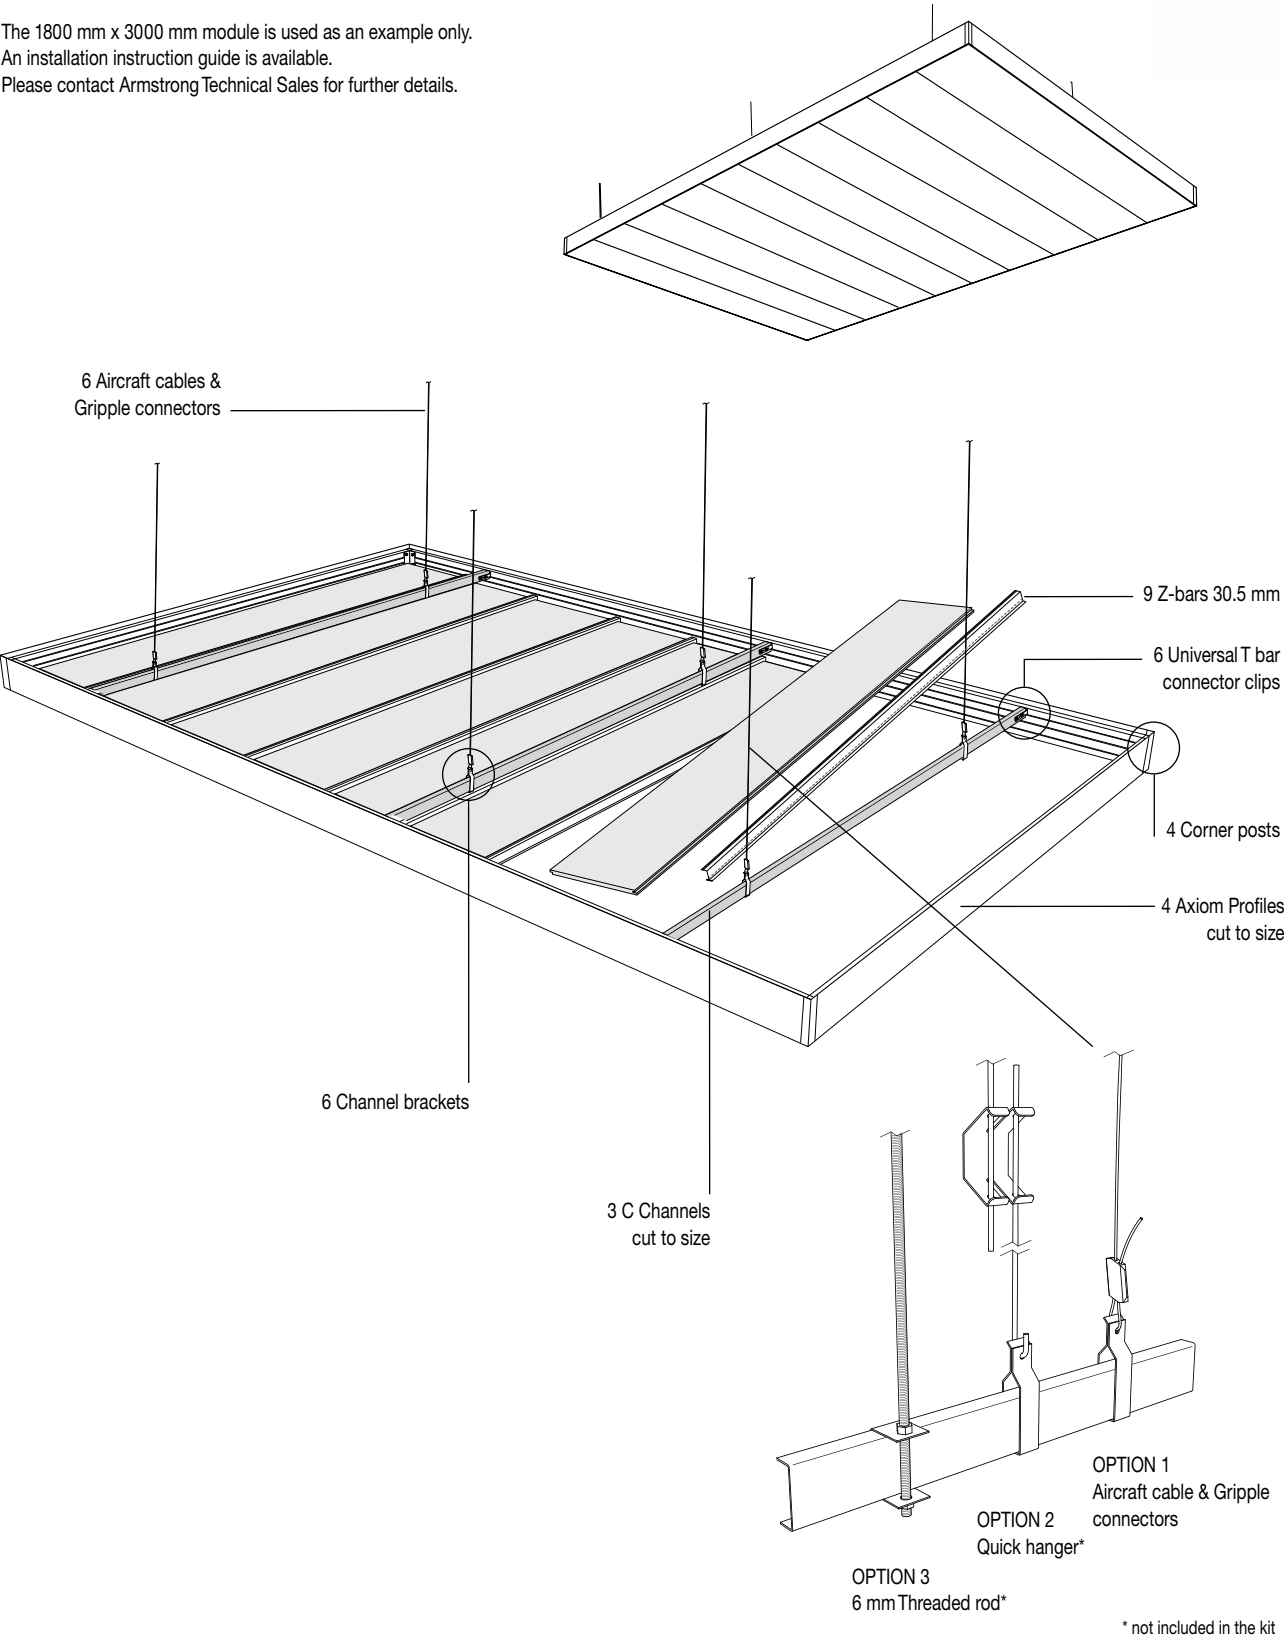

Max. tile load: 10kg/m<sup>2</sup>  
All canopies available in Global White. For any other colours / further information on customized size modules, please contact Armstrong Technical Sales.  
All measurements in millimeters. All sizes are nominal

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# AXIOM KE CANOPY

Floating ceiling suspension kits with AXIOM Knife Edge Profile for ceiling clouds with a sleek, minimalist appearance

Key Attributes

- Made-to-measure components and accessories all in a single box, ready-to-install for quick and easy installation
- Available in 10 standard modules with either Prelude 15 or Prelude 24 grid for installation with full size ceiling tiles
- Pre-fabricated corner sections for high quality corner detailing













Application area


Reception areas / Meeting areas / Circulation spaces / Retail

Physical data

- Material: aluminium / galvanised steel
- Surface finish: polyester powder painted
- Colour: Global White
- Other colours available upon request

AXIOM KE CANOPY COMPONENTS

Item Nr.	Description
	CS 57 42 06 G AXIOM KE Profile
	C 3000 H C Channel 19 x 38mm
	A WDN 21 H T bar hanger
	Cut to size Main Runner 600 mm XL² Cross Tees
	CS 57 G Mitre corner piece
	A 361 G Mitre corner splice connector
	A 348 G Channel bracket
	CA 97 H G Clamp for C channel
	A 347 G 24 mm XL² connector clip
	A 346 G 15 mm XL² connector clip
	A 338 H AXIOM Universal splice plate
	A 339 H AXIOM universal T bar connector clip for cut tees with screws

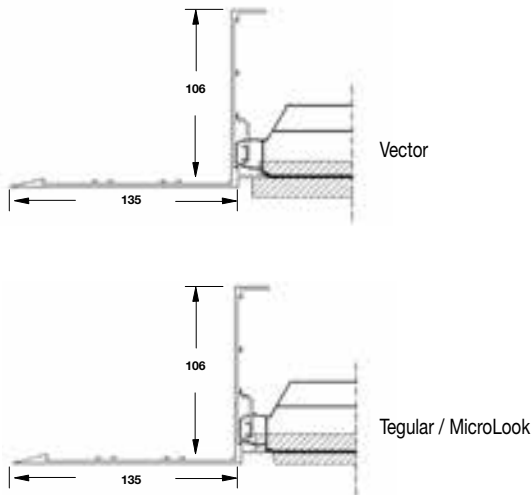

	3000	2400	1800	1200
1200	10 tiles	8 tiles	6 tiles	4 tiles
1800	15 tiles	12 tiles	9 tiles	
2400	20 tiles	16 tiles		
3000	25 tiles			

AXIOM KE CANOPY KITS\*

Module	Grid system 15 mm XL² Item Nr.	Grid system 24 mm XL² Item Nr.
1200 x 1200 mm	CS AK 22 G15	CS AK 22 G24
1800 x 1200 mm	CS AK 32 G15	CS AK 32 G24
1800 x 1800 mm	CS AK 33 G15	CS AK 33 G24
2400 x 1200 mm	CS AK 42 G15	CS AK 42 G24
2400 x 1800 mm	CS AK 43 G15	CS AK 43 G24
2400 x 2400 mm	CS AK 44 G15	CS AK 44 G24
3000 x 1200 mm	CS AK 52 G15	CS AK 52 G24
3000 x 1800 mm	CS AK 53 G15	CS AK 53 G24
3000 x 2400 mm	CS AK 54 G15	CS AK 54 G24
3000 x 3000 mm	CS AK 55 G15	CS AK 55 G24

\*Ceiling tiles are NOT included in the kit.


RECOMMENDATIONS

AXIOM KE Canopies should always be installed in accordance with all applicable building codes and regulations.

- AXIOM KE Canopies should only be installed on a horizontal plane. They are not approved for exterior installations.
- AXIOM KE Canopies should always be installed by a minimum of 2 people.
- Read the installation instructions included in the carton carefully before starting the installation.
- Make sure the installation is clean and safe.
- Any additional weights (such as luminaires...) must be independently suspended from the soffit.
- Aircraft cables are included as a standard in the kit but if you require more lateral restraint, we would recommend the use of 6 mm threaded rod or provide diagonal bracing.

SYSTEM DRAWING

The 1800 mm x 3000 mm module is used as an example only. An installation instruction guide is available. Please contact Armstrong Technical Sales for further details.

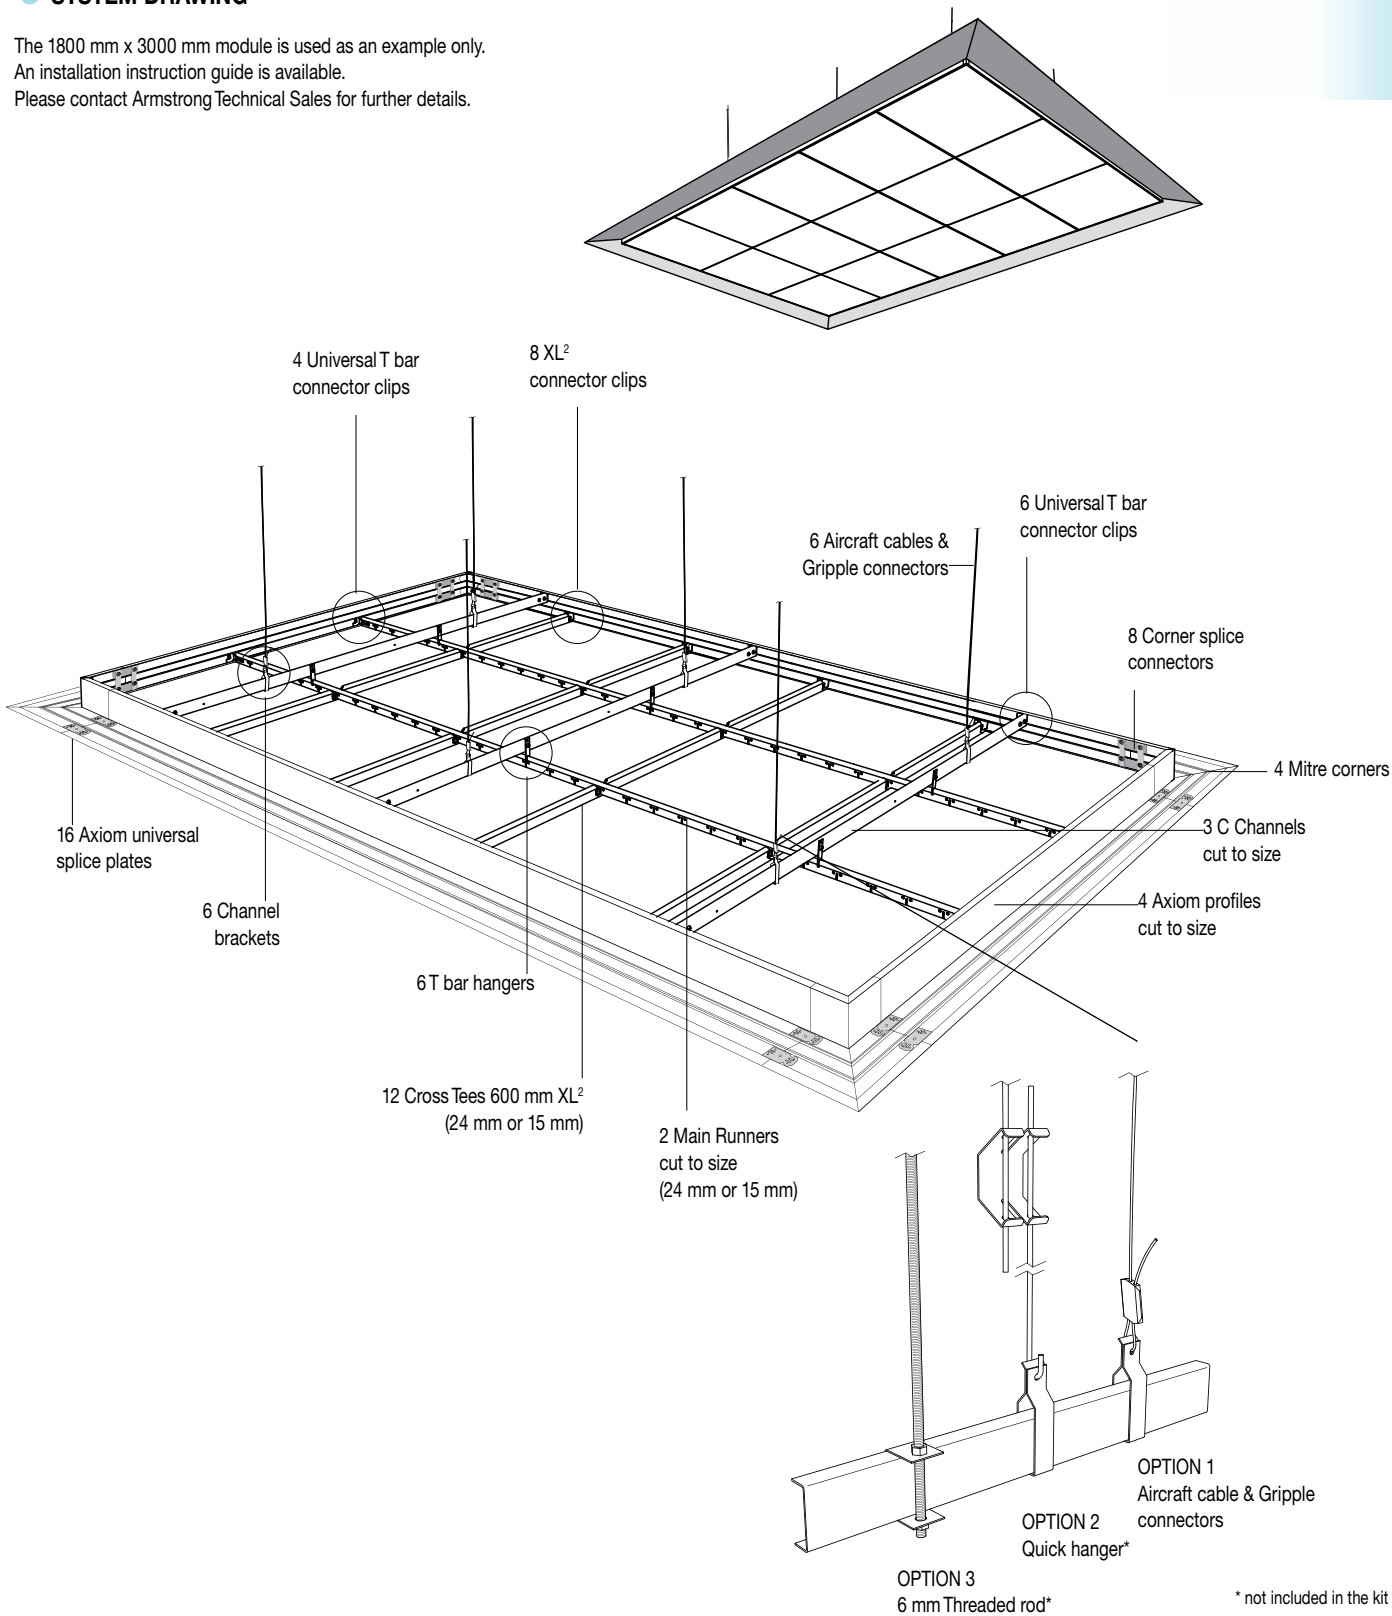

All canopies available in Global White. For any other colours, please contact Armstrong Technical Sales. All measurements in millimeters. All sizes are nominal

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.














# AXIOM CIRCLE & CURVED CANOPY

Floating ceiling suspension kits using curved 100mm AXIOM Profile to create attractive rounded ceiling clouds


Key Attributes

- Made-to-measure components and accessories all in a single box, ready-to-install for quick and easy installation
- Available in 7 standard shapes/modules with either Prelude 15 or Prelude 24 grid
- Pre-curved sections for high quality finish - no cutting on site

AXIOM CIRCLE COMPONENTS

Item Nr.	Description
	62 42 06 G AXIOM Circle and Curved Profile
	C 3000 H C Channel 19 x 38 mm
	30 40 33 A Prelude Peakform Main Runner T15 or 31 40 32 A Prelude Peakform Main Runner T24
	30 20 33 B Prelude XL² Cross Tee 600 mm T15 or 31 20 21 A Prelude XL² Cross Tee 600 mm T24
	AWDN 21 H T bar hanger
	A 361 G Splice connector
	A 339 H AXIOM universal T bar connector clip for cut tees with screws
	A 156 G Perimeter fill-in for 15 mm grid
	A 246 G Perimeter fill-in for 24 mm grid
	A 348 G Channel bracket
	CA 97 H Clamp for C channel

- Application area**  
Reception areas / Meeting areas / Circulation spaces / Retail
- Physical data**
- Material: aluminium / galvanised steel
  - Surface finish: polyester powder painted
  - Colour: Global White
  - Other colours available upon request

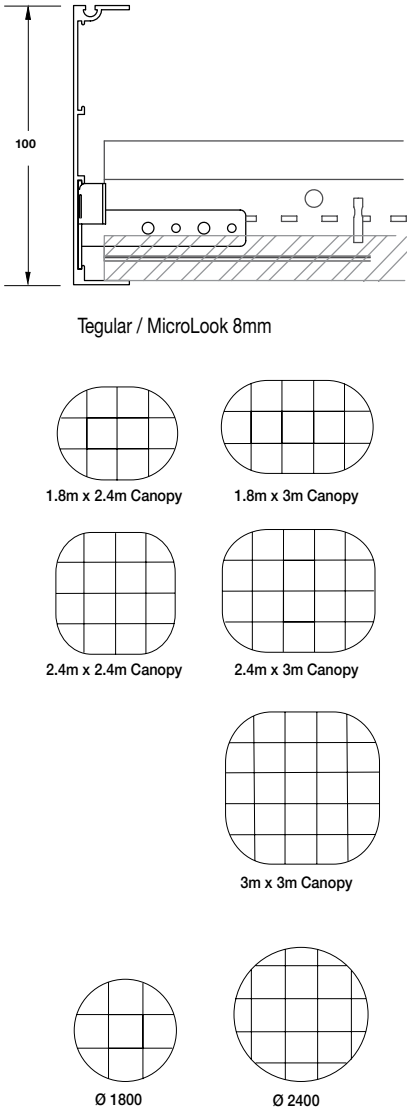


AXIOM CIRCLE & CURVED CANOPY KITS

Module	Grid system 15 mm XL² Item Nr.	Grid system 24 mm XL² Item Nr.
Circle 1800	CS ACI 33 G15	CS ACI 33 G24
Circle 2400	CS ACI 44 G15	CS ACI 44 G24
Curved 2400 x 1800	CS ACU 43 G15	CS ACU 43 G24
Curved 2400 x 2400	CS ACU 44 G15	CS ACU 44 G24
Curved 3000 x 1800	CS ACU 53 G15	CS ACU 53 G24
Curved 3000 x 2400	CS ACU 54 G15	CS ACU 54 G24
Curved 3000 x 3000	CS ACU 55 G15	CS ACU 55 G24

\*Ceiling tiles are NOT included in the kit.

SYSTEM DRAWING

An installation instruction guide is included within every carton.

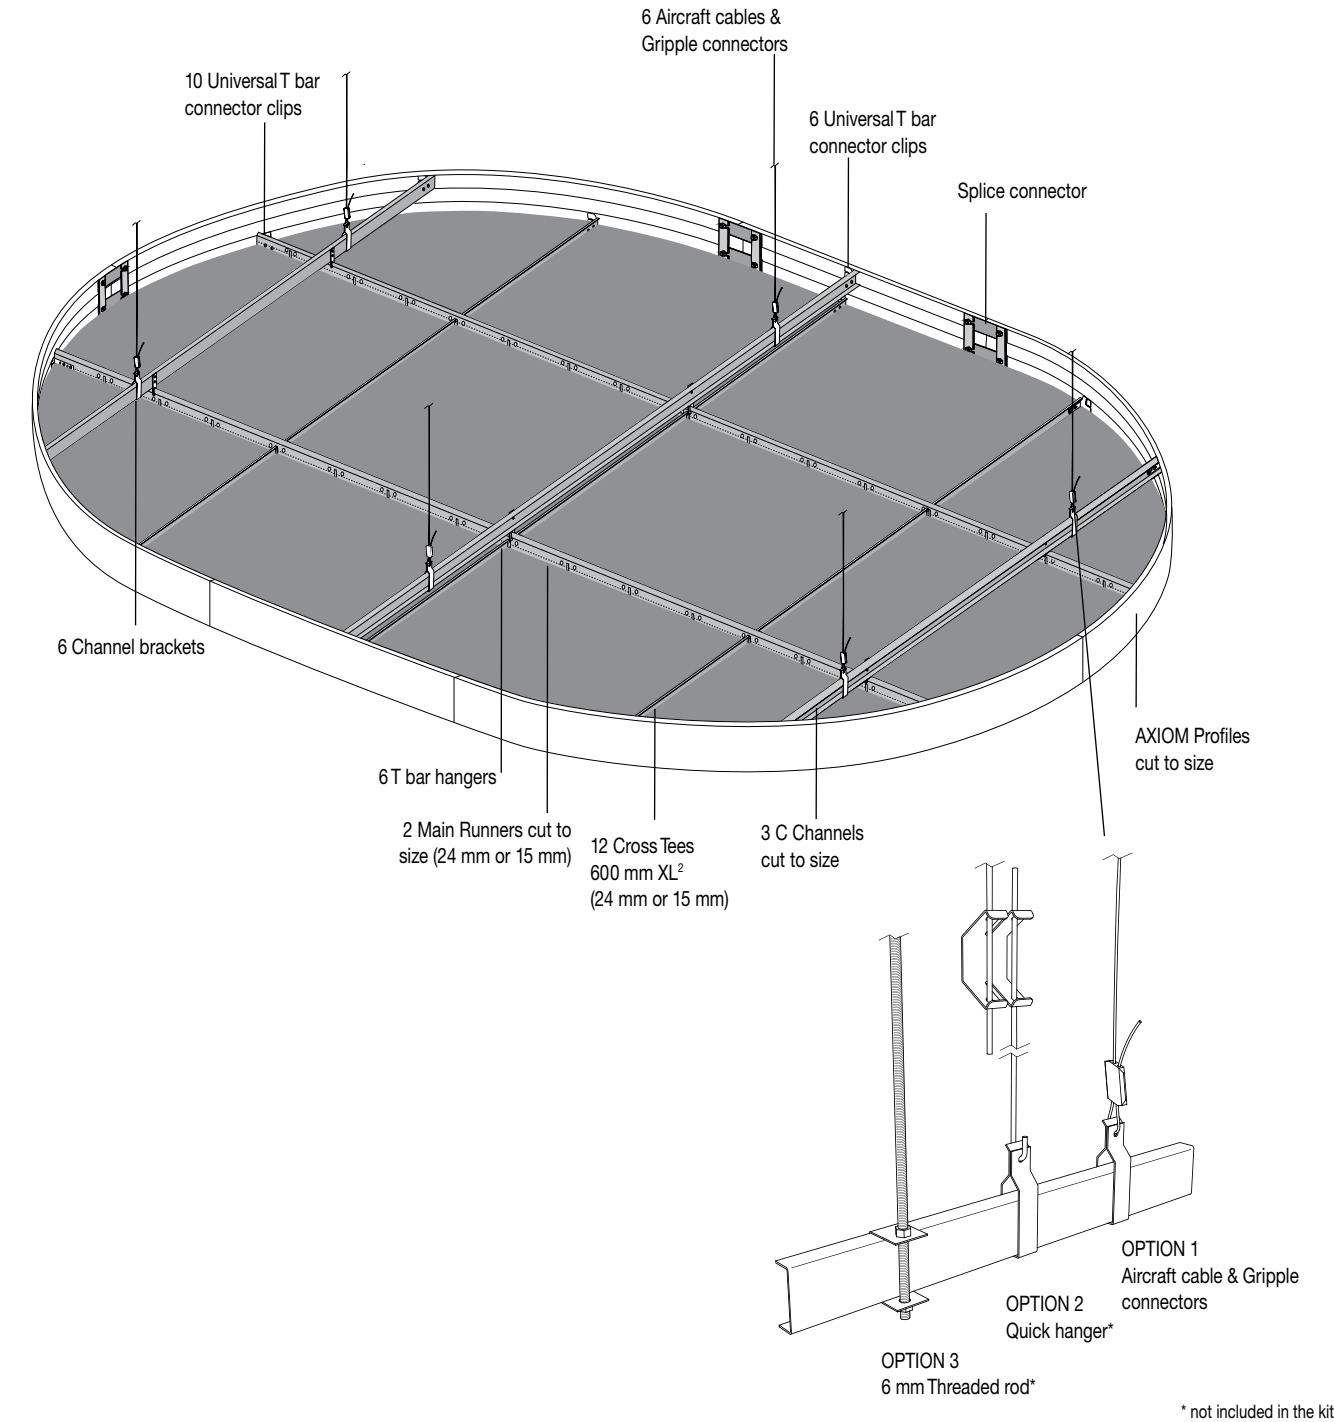

Max load: 10kg/m²  
All canopies available in Global White. For any other colours, please contact Armstrong Technical Sales.  
All measurements in millimeters. All sizes are nominal

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.








# AXIOM L CANOPY


Floating ceiling suspension kits using a shorter AXIOM L Profile frame to create simple ceiling clouds

Key Attributes

- Made-to-measure components and accessories all in a single box, ready-to-install for quick and easy installation
- Available in 5 standard modules with Prelude 24 Sixty<sup>2</sup> Main Runner for installation with full size ceiling tiles

AXIOM L CANOPY COMPONENTS

Item Nr.	Description
	
CS 534205	AXIOM L Profile (78.5 mm height)
	
404093 G	Prelude Sixty <sup>2</sup> Main Runner
	
312021 A	Prelude 24 XL <sup>2</sup> Cross Tee
	
A 390	Mitre corner connector
	
A 340 H	AXIOM Universal corner clip
	
A 339 H	AXIOM Universal T bar connector clip for cut tees with screws
	
A 347 G	AXIOM 24mm XL <sup>2</sup> connector clip

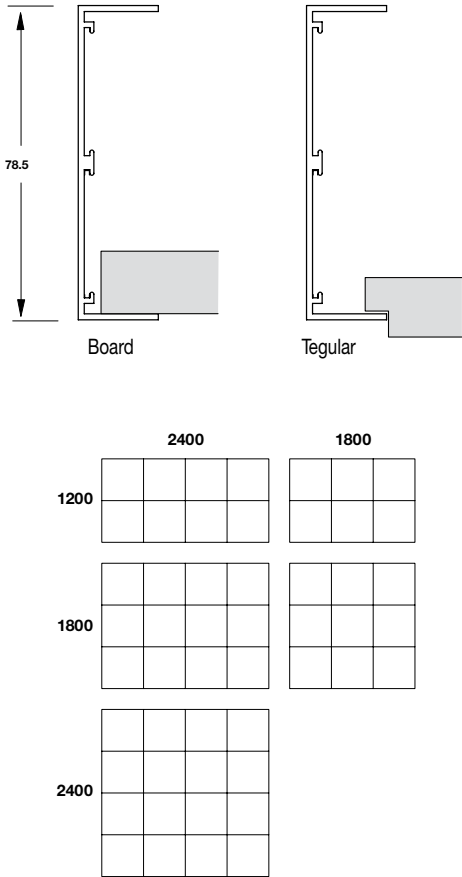


AXIOM L CANOPY KITS

Module	Grid system 24 mm XL <sup>2</sup> Item Nr.
1800 x 1200	CS AL 32 G24
1800 x 1800	CS AL 33 G24
2400 x 1200	CS AL 42 G24
2400 x 1800	CS AL 43 G24
2400 x 2400	CS AL 44 G24

\*Ceiling tiles are NOT included in the kit.

SYSTEM DRAWING

An installation instruction guide is included within every carton.

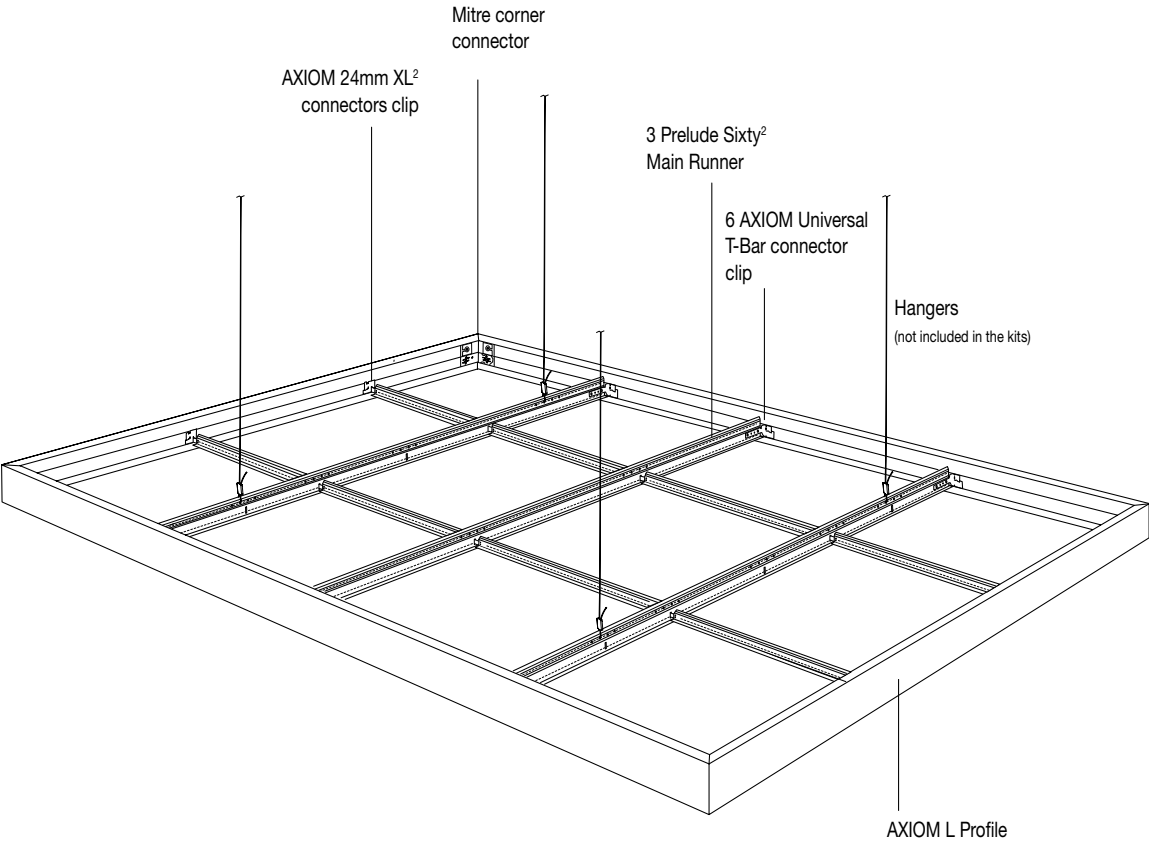

Max load: 5kg/m<sup>2</sup>  
All canopies available in Global White. For any other colours, please contact Armstrong Technical Sales.  
All measurements in millimeters. All sizes are nominal

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# AXIOM PROFILES

Extruded aluminium sections for perimeter detailing, changes of level and lighting features

Key Attributes

- Available in 5 different heights with Axiom corner posts and universal accessories for secure and easy installation
- Compatible with Armstrong exposed ceilings grid systems including Silhouette and Interlude HRC designer grids
- Plasterboard trims for seamless integration with plasterboard ceilings and Armstrong Drywall Grid System
- Factory finished - no on-site decoration required - save time on plastering, sanding and painting


Application area

All ceilings - Perimeters / Changes in level / Lighting features

Physical data


- Material: aluminium
- Surface finish: polyester powder painted
- Colour: Global White / RAL 9010
- Other colours available upon request

PRODUCT RANGE

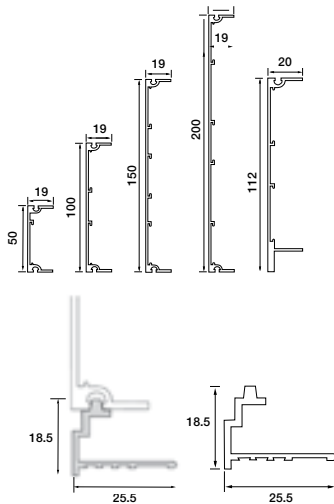


Item Nr.	Designation	Dimensions length (mm)	height (mm)	Content / Carton pcs	Weight / Carton kg	Cartons / Pallet
52 42 06 G <sup>(1)</sup>	AXIOM Profiles 50 mm	3000	50	5	15.00	7.80
54 42 06 G <sup>(1)</sup>	AXIOM Profiles 100 mm	3000	100	5	15.00	11.20
56 42 06 G <sup>(1)</sup>	AXIOM Profiles 150 mm	3000	150	5	15.00	14.70
58 42 06 G <sup>(1)</sup>	AXIOM Profiles 200 mm	3000	200	5	15.00	17.80
55 14 11 G <sup>(1)</sup>	AXIOM Vector Profiles 112 mm	3000	112	5	15.00	12.20
T 3213 H <sup>(1)</sup>	AXIOM Profiles plasterboard trim	3000	18,5	10	30.00	5.80

ACCESSORIES

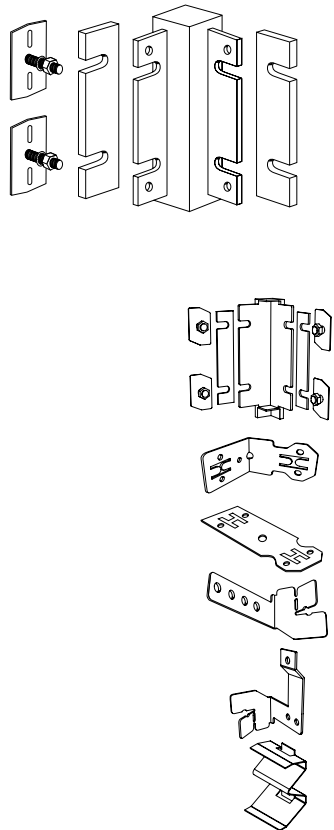


Item Nr.	Designation	Dimensions height (mm)	Content / Carton pcs	Weight / Carton kg
A 334 G <sup>(1)</sup>	AXIOM Profiles corner post 50 mm	50	2	0.30
A 335 G <sup>(1)</sup>	AXIOM Profiles corner post 100 mm	100	2	0.50
A 336 G <sup>(1)</sup>	AXIOM Profiles corner post 150 mm	150	2	0.70
A 337 G <sup>(1)</sup>	AXIOM Profiles corner post 200 mm	200	2	0.90
A 345 G <sup>(1)</sup>	AXIOM Vector corner post 112 mm	112	2	0.60
A 340 H	AXIOM Universal corner clip	-	100	2.10
A 338 H	AXIOM Universal splice plate	-	100	2.10
A 339 J	AXIOM Universal T bar connector clip	-	100	2.10
A 344 H	AXIOM Universal hanging clip	-	100	2.10
A 7935	AXIOM Universal Hold down clip for cut metal tiles	-	100	0.80

SYSTEM DRAWING

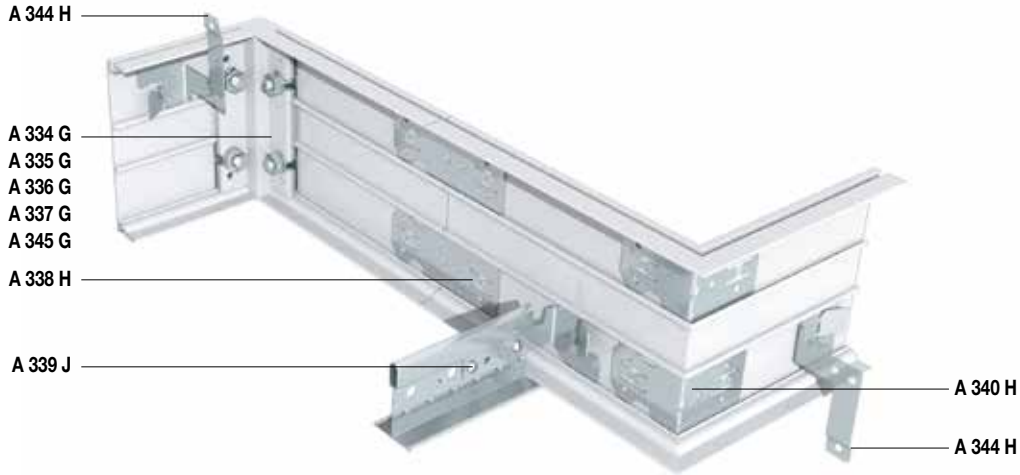

CONCEALED LIGHTING DETAIL

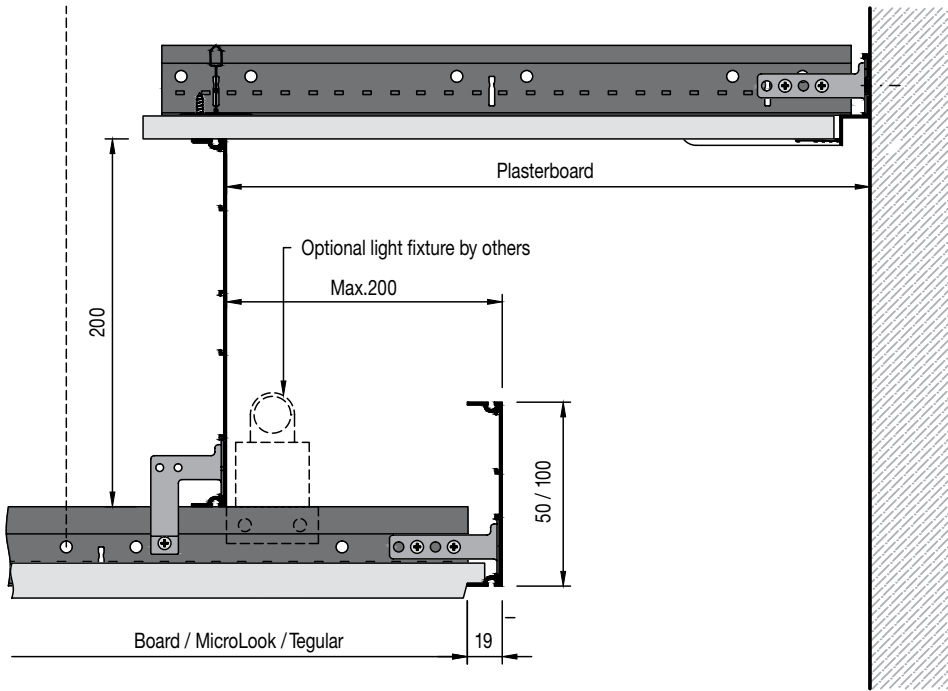

All canopies available in Global White. For any other colours, please contact Armstrong Technical Sales.  
(1) Also available in RAL 9010.  
All measurements in millimeters. All sizes are nominal

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# AXIOM TRANSITIONS

Extruded aluminium sections to provide a seamless transition between plasterboard margins and suspended ceilings

**Key Attributes**

- 12 sections designed for compatibility with different edge details using Axiom universal accessories for secure and easy installation
- Compatible with Armstrong exposed ceiling grid systems including Silhouette and Interlude HRC designer grids
- Plasterboard jointing flange for seamless integration with plasterboard ceings and Armstrong Drywall Grid System


**Application area**

All ceilings - Perimeters

**Physical data**


- Material: aluminium
- Surface finish: polyester powder painted
- Colour: Global White / RAL 9010
- Other colours available upon request

● **PRODUCT RANGE**

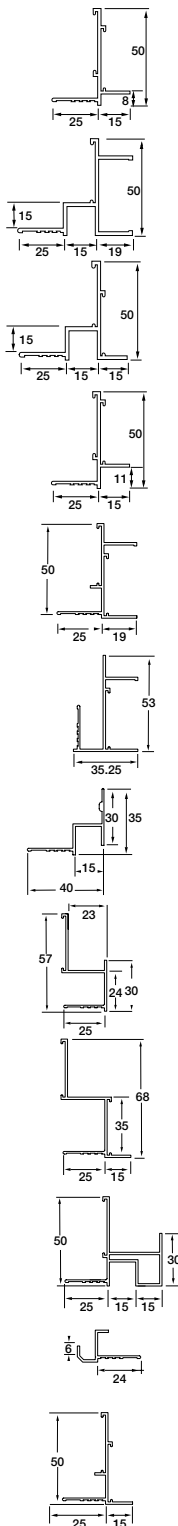


Item Nr.	Designation	Dimensions length (mm) height (mm)	Content / Carton pcs lm	Weight / Carton kg	Cartons / Pallet		
T 3208 G <sup>(1)</sup>	AXIOM Transitions for Tegular/MicroLook	3000	50	10	30.00	11.80	36
T 3219 G <sup>(1)</sup>	AXIOM Transitions channel	3000	50	10	30.00	17.10	36
T 3215 G <sup>(1)</sup>	Axiom Transitions shadowline angle	3000	50	10	30.00	15.00	36
T 3210 G <sup>(1)</sup>	AXIOM Transitions for Vector tiles	3000	50	10	30.00	11.80	36
T 3228 <sup>(1)</sup>	Axiom Transitions shadowline channel	3000	50	10	30.00	13.50	36
T 3230 <sup>(1)</sup>	AXIOM Transitions upstand Channel 13mm Board	3000	53	10	30.00	13.80	36
T 3270 <sup>(2)</sup>	AXIOM Transitions Shadowline for T-Clip F (full tiles)	3000	35	10	30.00	8.85	36
T 3272 <sup>(2)</sup>	AXIOM Transitions channel for B-H 300 (full tiles)	3000	57	10	30.00	12.45	36
T 3273 <sup>(2)</sup>	AXIOM Transitions angle with offset 25mm	3000	68	10	30.00	14.95	36
T 3276 <sup>(2)</sup>	AXIOM Transitions Shadowline for B-H 300 (full tiles)	3000	51	10	30.00	19.65	36
T 3277 <sup>(2)</sup>	AXIOM Transitions for S-Clip F, Q-Clip F, R-Clip F (full tiles)	3000	18	10	30.00	6.03	36
T 3271 <sup>(1)</sup>	AXIOM Transitions angle	3000	51	10	30.00	12.00	36

● **SYSTEM DRAWING**

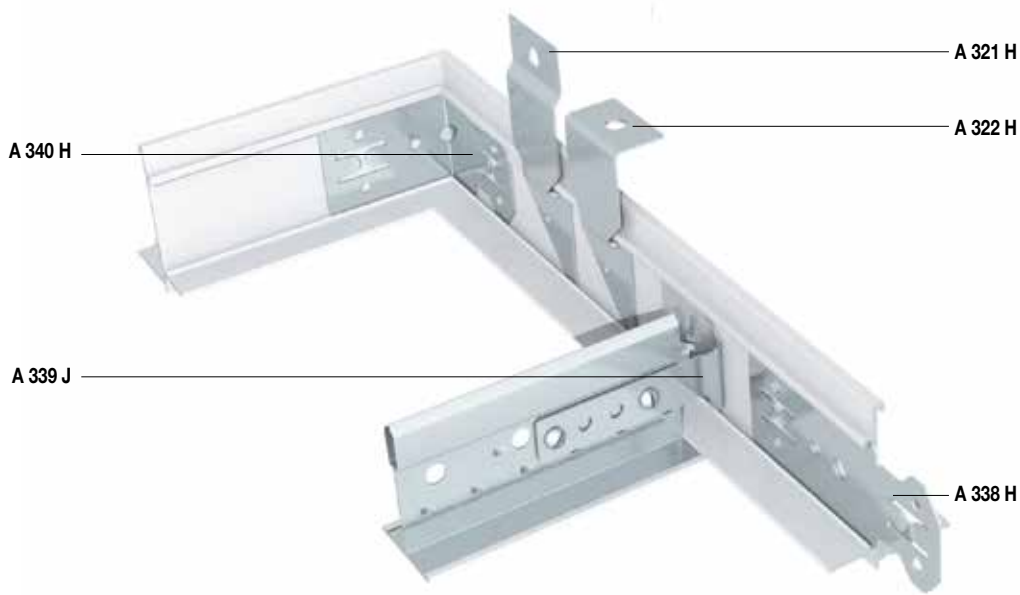

● **CROSS SECTION**

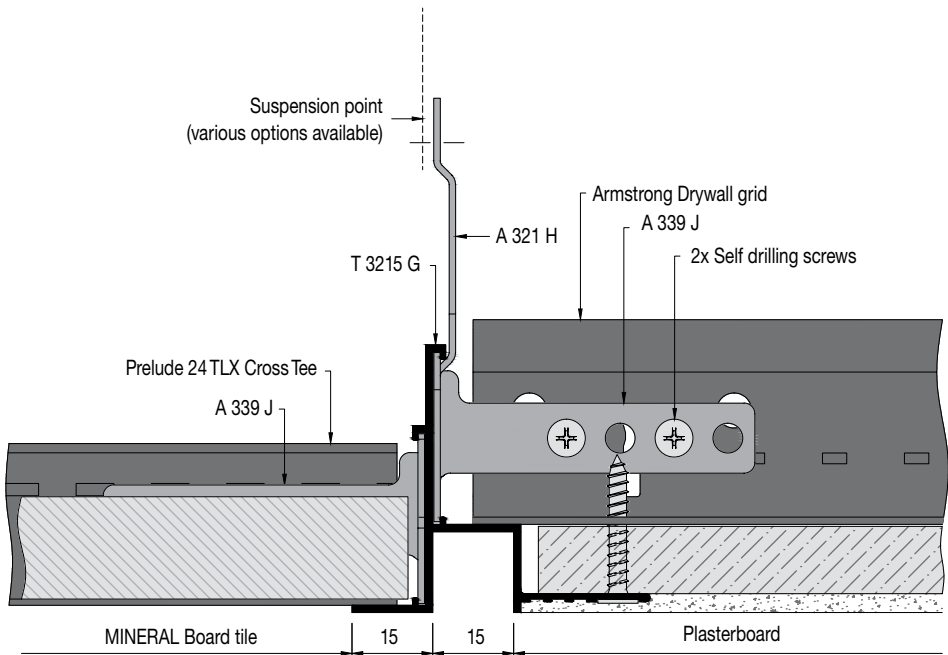

All canopies available in Global White. For any other colours, please contact Armstrong Technical Sales.  
(1) Also available in RAL 9010.  
(2) Standard colour RAL 9010 (WR), Global White on request.  
All measurements in millimeters. All sizes are nominal

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

# AXIOM BLIND BOXES

Extruded aluminium profiles for detailing perimeter blind boxes or concealed lighting features

Key Attributes

- Pre-engineered profiles using Axiom universal accessories for a secure and easy installation
- Provide a sharp finish to integrate with suspended ceiling tiles or plasterboard ceilings
- Factory finished - no on-site decoration required - save time on plastering, sanding and painting


Application area

All ceilings - Perimeters / Lighting features

Physical data


- Material: aluminium
- Surface finish: polyester powder painted
- Colour: Global White / RAL 9010
- Other colours available upon request

PRODUCT RANGE

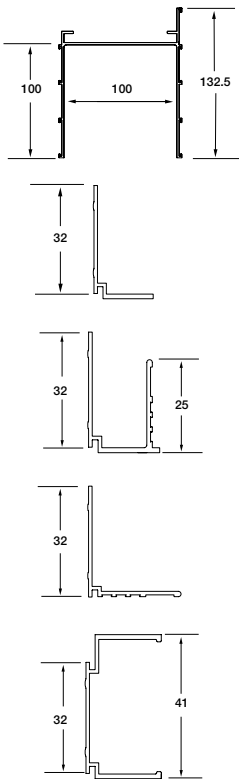

Item Nr.	Designation	Dimensions length (mm)	height (mm)	Content / Carton pcs	Carton lm	Weight / Carton kg	Cartons / Pallet
T 3250 <sup>(1)</sup>	AXIOM Blind Box - 100mm	3000	132.5	5	15.00	31.20	20
T 3251 <sup>(1)</sup>	AXIOM Blind Box Perimeter angle	3000	32	10	30.00	4.60	36
T 3252 <sup>(1)</sup>	AXIOM Blind Box Transition upstand 13mm Board	3000	32	10	30.00	7.10	36
T 3253 <sup>(1)</sup>	AXIOM Blind Box Transition angle	3000	32	10	30.00	5.00	36
T 3254 <sup>(1)</sup>	AXIOM Blind Box Perimeter channel	3000	41	10	30.00	8.00	36


ACCESSORIES




Item Nr.	Designation	Dimensions height (mm)	Content / Carton pcs	Weight / Carton kg
A 340 H	AXIOM Universal corner clip	-	100	2.10
A 338 H	AXIOM Universal splice plate	-	100	2.10
A 344 H	AXIOM Universall hanging clip	-	100	2.10
A 3255	Hanger for AXIOM Blind Box	25	10	2.10

CROSS SECTION


Cross Section  
Cut Metal Tile

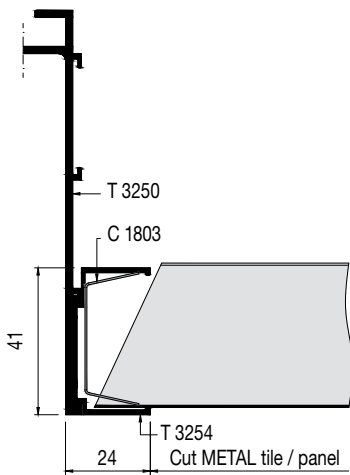


Cross Section  
MicroLook / Tegular

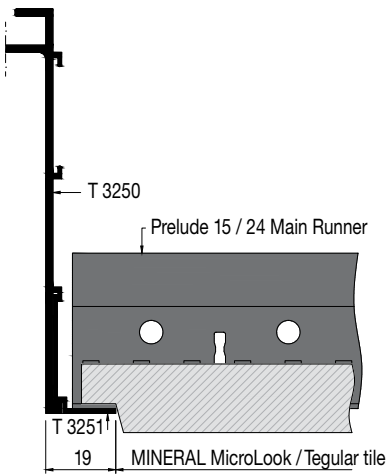


Cross Section  
Plasterboard Horizontal

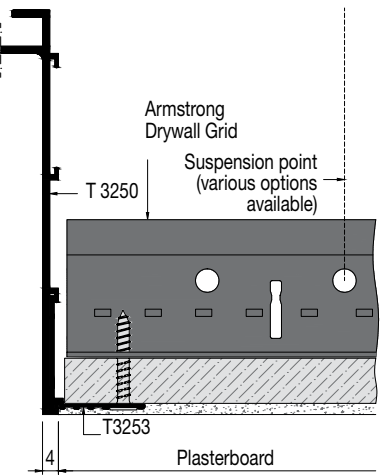

Cross Section  
Plasterboard Vertical

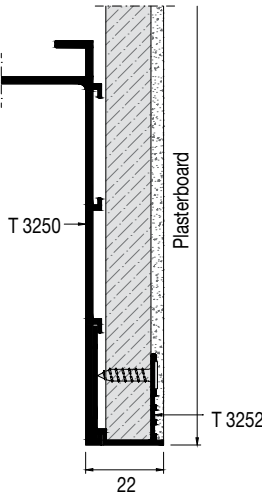

AXIOM Blind Box to Wall

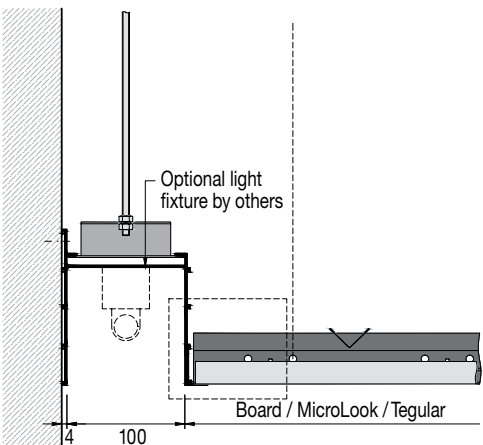

All canopies available in Global White. For any other colours, please contact Armstrong Technical Sales.  
(1) Also available in RAL 9010.  
All measurements in millimeters. All sizes are nominal

# AXIOM PERIMETER ANGLES / CHANNELS

Extruded aluminium sections for classic perimeter solutions with mineral, metal , wood or plasterboard ceilings

Key Attributes

- Angle and channel sections designed for compatibility with Axiom universal accessories for secure and easy installation
- Compatible with Armstrong ceiling grid systems including Silhouette and Interlude HRC designer grids
- Plasterboard perimeter trim for finishing plasterboard ceings and Armstrong Drywall Grid System


Application area

All ceilings - Perimeters

Physical data


- Material: aluminium
- Surface finish: polyester powder painted
- Colour: Global White / RAL 9010
- Other colours available upon request

PRODUCT RANGE

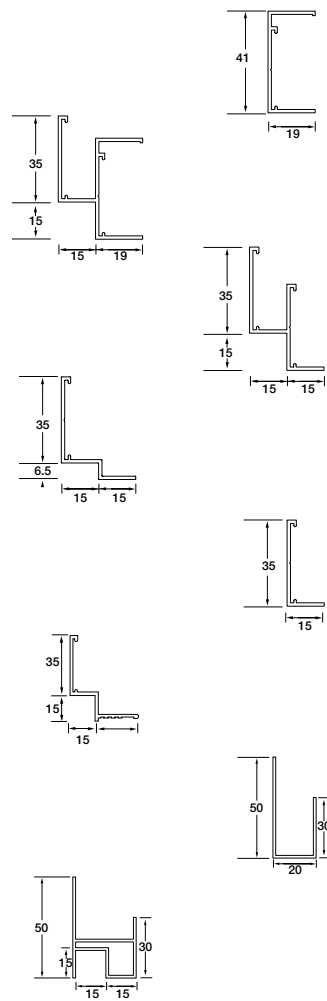



Item Nr.	Designation	Dimensions length (mm) height (mm)	Content / Carton pcs	Weight / Carton kg	Cartons / Pallet
T 3249 <sup>(1)</sup>	AXIOM Perimeter C profile 41 x 19mm	3000 41	10	30.00 9.00	36
T 3226 <sup>(1)</sup>	AXIOM Perimeter Shadowline channel 35 x 15 x 15 x 19mm	3000 50	10	30.00 15.90	36
T 3227 <sup>(1)</sup>	AXIOM Perimeter Shadowline angle 35 x 15 x 15 x 15mm	3000 50	10	30.00 12.00	36
T 3248 <sup>(1)</sup>	AXIOM Perimeter Shadowline angle 35 x 15 x 6.5 x 15mm	3000 40	10	30.00 8.10	36
T 3235 <sup>(1)</sup>	AXIOM Perimeter angle 35 x 15mm	3000 35	10	30.00 5.70	36
T 3235 G <sup>(1)</sup>	AXIOM Perimeter plasterboard trim	3000 50	10	30.00 11.30	36
T 3274 <sup>(2)</sup>	AXIOM Perimeter for B-H 300 (full tiles)	3000 50	10	30.00 10.85	36
T 3275 <sup>(2)</sup>	AXIOM Perimeter Shadowline for B-H 300 (full tiles)	3000 50	10	30.00 16.55	36

ACCESSORIES

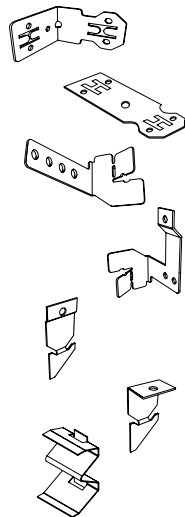

Item Nr.	Designation	Dimensions height (mm)	Content / Carton pcs	Weight / Carton kg
A 340 H	AXIOM Universal corner clip	-	100	2.10
A 338 H	AXIOM Universal splice plate	-	100	2.10
A 339 J	AXIOM Universal T bar connector clip	-	100	2.10
A 344 H	AXIOM Universal hanging clip	-	100	2.10
A 321 H	AXIOM Transitions suspension clip – straight	79	100	2.10
A 322 H	AXIOM Transitions suspension clip – angled	62	100	2.10
A 7935	AXIOM Universal Hold down clip for cut metal tiles	-	100	0.80

CROSS SECTION

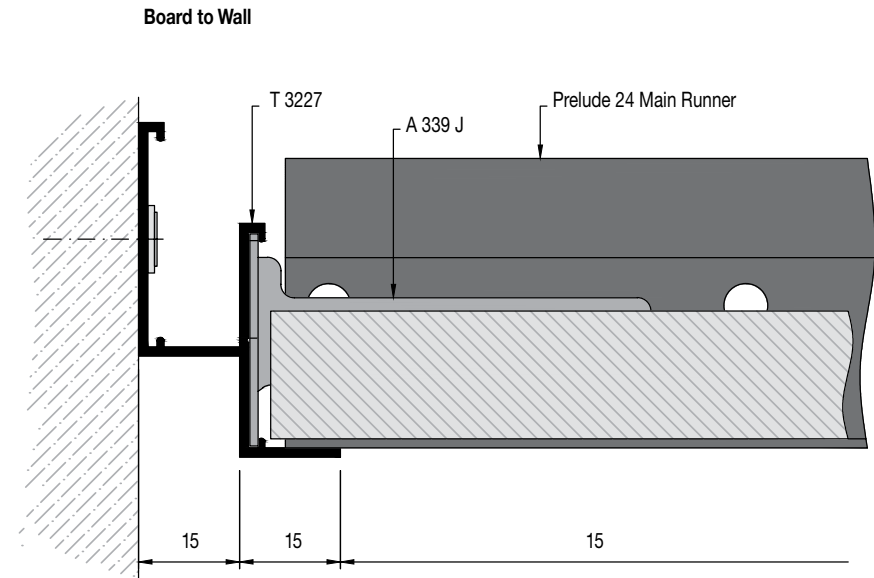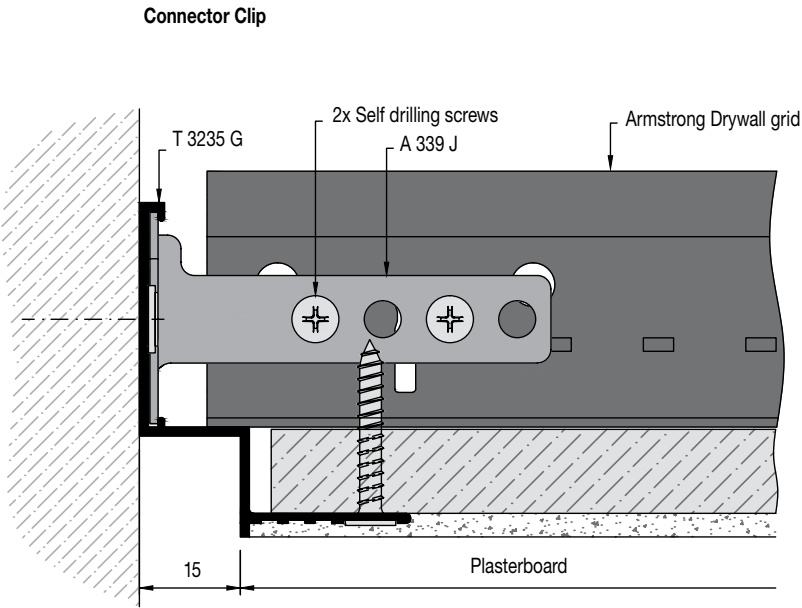

All canopies available in Global White. For any other colours, please contact Armstrong Technical Sales.  
(1) Also available in RAL 9010.  
(2) Standard colour RAL 9010 (WR), Global White on request.  
All measurements in millimeters. All sizes are nominal

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.



# PERIMETER TRIMS & BULKHEADS

**Perimeter trims for metal tiles:** Steel and extruded aluminium sections designed specifically for perimeter detailing of metal ceiling systems

**Key Attributes:** a variety of different angle and channel sections for a wide choice of perimeter design options

**Application area:** all ceilings - perimeters

**Physical data:** material: galvanised steel / aluminium

- Surface finish: polyester powder painted
- Colour: RAL 9010
- Other colours available upon request

**Bulkheads:** Engineered steel bulkhead sections primarily for installation with metal ceiling systems

**Key Attributes:** choice of bulkhead type for full tile or cut-tile integration


- Post-coated for colour match with Armstrong metal ceiling systems
- Accessories and bracing profile for complete system solution

**Application area:** all ceilings - perimeters / changes in level


**Physical data:** material: galvanised steel

- Surface finish: polyester powder painted
- Standard colour: RAL 9010
- Other colours available upon request


## F-PERIMETER TRIMS SYSTEM DRAWING

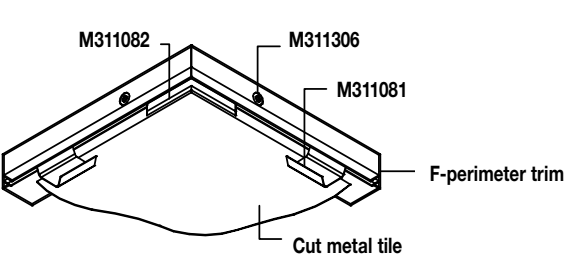

## PERIMETER TRIMS SYSTEM DRAWING

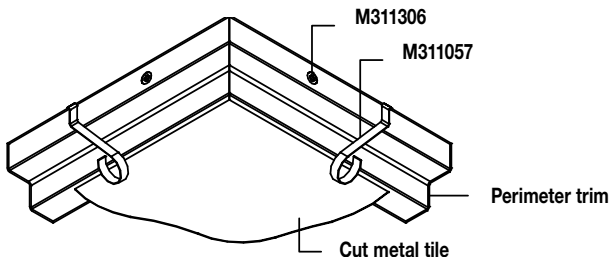


## PERIMETER TRIMS

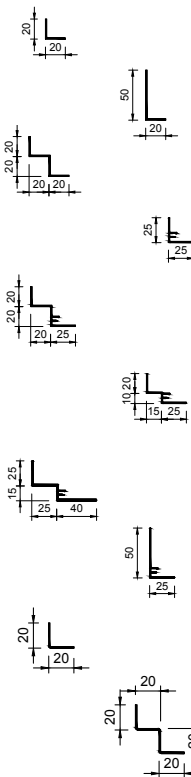

Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	lm	Weight / Carton kg
M215110	RA 1 perimeter trim	Aluminium	4000 x 20 x 20	10	40	5.2
M215111	RA 2 perimeter trim	"	4000 x 20 x 50	10	40	9.2
M215112	RA 3 shadowline perimeter trim	"	4000 x 20 x 20 x 20 x 20	10	40	11.2
M215013	RA 4 F perimeter trim	"	4000 x 25 x 25	10	40	8.0
M215014	RA 5 F shadowline perimeter trim	"	4000 x 20 x 20 x 20 x 25	10	40	13.5
M215015	RA 6 F shadowline perimeter trim	"	4000 x 20 x 15 x 10 x 25	10	40	11.0
M215206	RA 8 F shadowline perimeter trim	"	4000 x 25 x 25 x 15 x 40	10	40	19.3
M215233	RA 9 F perimeter trim	"	4000 x 50 x 25	10	40	11.0
M215213	RA 1 S perimeter trim	Galvanised steel	3000 x 20 x 20	10	30	9.2
M215214	RA 3 S shadowline perimeter trim	"	3000 x 20 x 19 x 19 x 20	10	30	22.6

## ACCESSORIES




Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	lm	Weight / Carton kg
M311306	Percussion dowel HPS-1	Steel / plastic	5 x 25	100	-	0.3
M311081	Pressure spring	Spring steel	54 x 30 x 10	100	-	0.3
M311082	Corner connector	Plastic	50 x 50 x 3	100	-	0.3
M311057	Fixing spring	Spring steel	55 x 27 x 6	100	-	0.3


## BULKHEADS

Item Nr.	Description	Material	Dimensions mm	Content / Carton pcs	lm	Weight / Carton kg
M216000	Bulkhead 200 mm type 1B	Galvanised steel	2000 x 200 x 25	2	4	7.4
M216001	Bulkhead 300 mm type 1B	"	2000 x 300 x 25	2	4	10.7
M216002	Bulkhead 400 mm type 1B	"	2000 x 400 x 25	2	4	14.0
M216003	Bulkhead 600 mm type 1B	"	2000 x 600 x 25	2	4	20.5
M215060	Bulkhead 200 mm type 2A	"	2400 x 200 x 25	2	4.8	11.4
M215061	Bulkhead 300 mm type 2A	"	2400 x 300 x 25	2	4.8	15.3
M215062	Bulkhead 400 mm type 2A	"	2400 x 400 x 25	2	4.8	23.1
M215063	Bulkhead 750 mm type 2A	"	1200 x 750 x 25	2	2.4	16.8
M215064	Bulkhead 1000 mm type 2A	"	1200 x 1000 x 25	2	2.4	27.3

### Bulkhead type 1B





### Bulkhead type 2A



### Accessories

M311330	Attachment bracket	Galvanised steel	80 x 65 x 30	10	0.8
M311336	Slotted L-profile	"	3000 x 25 x 25	10	15.0
M311303	Hexagonal bolt M6 x 16 mm	"	M6 x 16	100	0.5
M311103	Hexagonal nut M6	"	M6 x 5	100	0.3
M311305	Washer M6 18 x 1.6 mm	"	Ø18 x 1.6	100	0.3

## STEEL BULKHEADS SYSTEM DRAWING

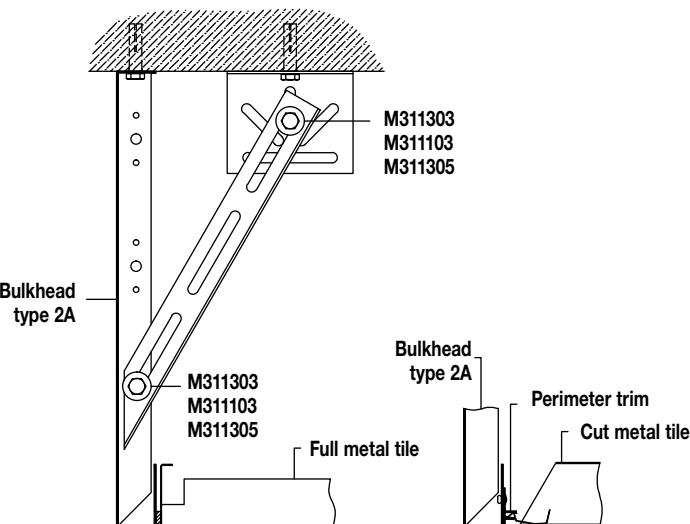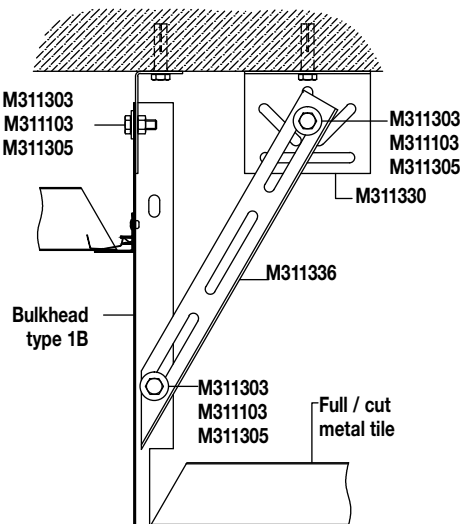

All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

PERIMETER TRIMS

Standard perimeter trims for classic perimeter solutions with mineral and wood ceilings

Key Attributes













- Comprehensive range including angle trims, shadowline trims, channels and F-upstand trims

Application area

All ceilings - Perimeters

Physical data

- Material: steel
- Surface finish: baked polyester paint
- Colour: all products standard in Global White
- Other standard colours available on popular items







Item Nr.	Description	Dimensions		Content /Unit		Weight/Carton
		length (mm)	thickness (mm)	pcs	lm	
T 1924 HD	Perimeter angle, painted	3000	0.54	36	108.00	22.70
T 1924 CA <sup>(1)</sup>	Perimeter angle, capped	3050	0.60	36	109.80	27.60
T 1924 LB	Perimeter angle, corrosive resistant	3050	0.55	36	109.80	27.60
T 2419 H WR	Perimeter angle, painted 24 x 19 RAL 9010	3000	0.45	36	108.00	18.30
T 2419 H SG	Perimeter angle, painted 24 x 19 RAL 9006	3000	0.45	36	108.00	18.30
T 2419 H BK	Perimeter angle, painted 24 x 19 Black	3000	0.45	36	108.00	18.30
T 1932 HA	Perimeter angle, painted	3000	0.45	36	108.00	21.80
T 1919 HC	Perimeter angle, painted	3000	0.45	36	108.00	21.80
T 2222 HA <sup>(2)</sup>	Perimeter angle	3000	0.45	36	108.00	19.00
T 2401 HA	Perimeter angle, painted heavy duty	3050	0.70	30	91.50	22.00
T 2424 HD	Perimeter angle, painted	3050	0.45	36	109.80	21.60
T 3024 HA	Perimeter angle, painted	3000	0.45	30	90.00	21.40
T 3030 H	Perimeter angle, painted	3000	0.54	30	90.00	25.00
T 3030H UP	Perimeter angle, painted	3000	0.54	30	90.00	25.00
T 3030H BK	Perimeter angle, painted	3000	0.54	30	90.00	25.00
T 1506 H	Shadowline, painted	3050	0.45	36	109.80	26.30
T 1508 HB <sup>(3)</sup>	Shadowline, painted	3050	0.45	36	109.80	27.10
7875 G	Shadowline, painted, for OPTIMA Vector, ULTIMA+ Vector, DUNE Vector	3050	0.45	30	91.50	26.80
T 2020 HH	Shadowline, painted	3000	0.65	20	60.00	27.00
T 2121 HH	Shadowline, air circulation length of slot: 50 mm Distance between slots 20 mm (ca, 16% open area)	3000	0.60	15	45.00	20.00
T 2040 HB	C channel, painted	3050	0.45	20	61.00	18.10
T 2040 HWRA	C channel, painted, RAL 9010	3050	0.45	20	61.00	18.10
T 2040 HSGA	C channel, painted, RAL 9006	3050	0.45	20	61.00	18.10


PERIMETER TRIMS

Item Nr.	Description	Dimensions		Content /Unit		Weight/Carton
		length (mm)	thickness (mm)	pcs	lm	
7837	C Channel, painted	3050	0.45	40	73.10	24.00
T 1575 HA	Unequal U-Profile, painted	3050	0.45	36	109.80	24.20
7856 H	F Upstand trim, painted, for 16 mm thick panels	3050	0.45	20	61.00	23.70
7852 H	F Upstand trim, painted, for 13 mm thick panels	3050	0.45	20	61.00	23.00

PERIMETER DETAILING

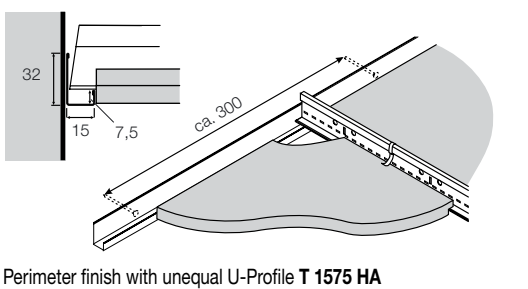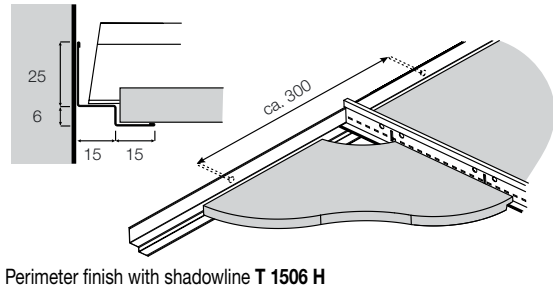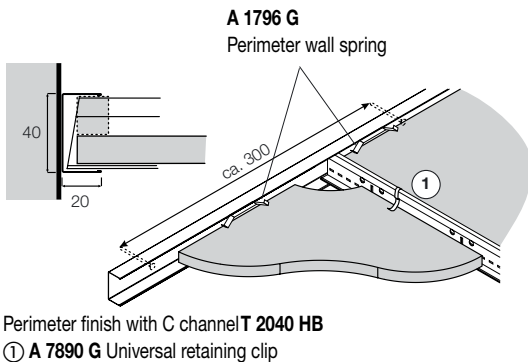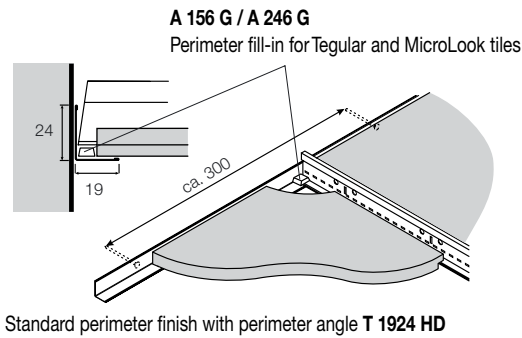

FLEXIBLE PERIMETER TRIMS







Item Nr.	length (mm)	height (mm)	Content / Carton pcs	Weight / Carton kg	Cartons / Pallet
White					
FT 2424	2500	24	10	25.00	50
FT 2424	2500	29	10	25.00	50
Black					
FT 2424 BK	2500	24	10	25.00	50
FT 1929 BK	2500	29	10	25.00	50








All products standard in Global White, if not mention differently. Other standard colours available for item numbers with index (1). See details below.  
(1) Colours available: Black (BK), RAL 9006 (SG), Brass (BS), Chrome (CE), White RAL 9010 (WR).  
(2) Only available for the Scandinavian and Spanish markets.  
(3) Also available in Black (BK), RAL 9006 (SG) and RAL 9010 (WR).  
All measurements in millimetres. All sizes are nominal.

Availability of products may vary according to location. Please contact Armstrong Technical Sales for further details.

SUSPENSION & ACCESSORIES

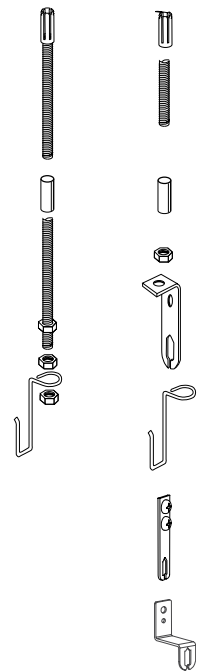

Item Nr.	Description	Dimensions length (mm)	Content /Carton pcs	Weight/Carton kg
A W950 G	Suspension wire dia, 2 mm	ca, 200 metres	1 coil	4.70
A 1843 G	Expanded bolt for threaded rod dia, 6 mm	25	100	0.50
A 1829 G	Threaded rod dia, 6 mm	1000	50	8.50
A 1839 G	Connection for threaded rod dia, 6 mm	20	100	0.60
A 1827 G	Nut for threaded rod		100	0.20
A WDN20 H	Bent tee bar hanger for threaded rod	57	100	1.40
A 14 G	Universal clip	40	100	1.00
A WDN21 H	T bar hanger	-	20	0.30
A WDN23 G	Double bent T bar hanger with 2 sizes of diameter hole	57	100	2.30
A 11030 G	Quick hanger - hook (2 hooks)	165-280	100	5.40
A 11020 G	Quick hanger - hook (2 hooks)	215-380	100	4.10
A 11040 G	Quick hanger - hook (2 hooks)	315-580	100	8.50
A 11070 G	Quick hanger - hook (2 hooks)	415-780	100	10.50
A 11090 G	Quick hanger - hook (2 hooks)	515-980	100	13.00
A 12030 G	Quick hanger - eye (1 hook +1 eye)	165-280	36	5.20
A 12020 G	Quick hanger - eye (1 hook +1 eye)	215-380	36	4.10
A 12040 G	Quick hanger - eye (1 hook +1 eye)	315-580	36	8.30
A 12070 G	Quick hanger - eye (1 hook +1 eye)	415-780	36	10.50
A 12090 G	Quick hanger - eye (1 hook +1 eye)	515-980	36	13.00

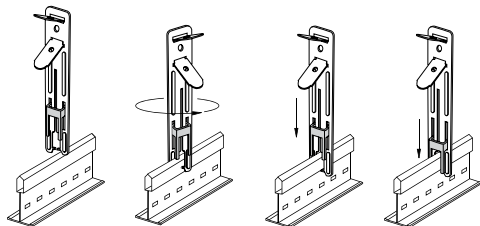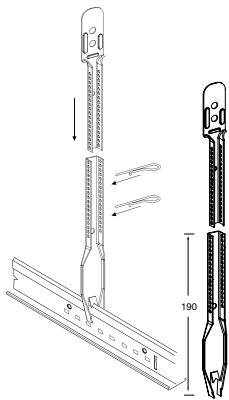


Item Nr.	Description	Dimensions length (mm)	Content /Carton pcs	Weight/Carton kg
A 10202 H	Upper part of nonius	300	100	5.10
A 10203 H	Upper part of nonius	400	100	7.20
A 10204 H	Upper part of nonius	500	100	9.00
A 10205 H	Upper part of nonius	600	100	11.00
A 10206 H	Upper part of nonius	700	100	12.80
A 10208 H	Upper part of nonius	800	100	15.50
A 10230 G	Bottom part of nonius hanger	190	100	4.30
A 10300 G	Short Nonius hanger (upper & lower part) 84-116 mm	-	100	2.3
A 10301 G	Short Nonius hanger (upper & lower part) 102-137 mm	-	100	2.4
A 10302 G	Short Nonius hanger (upper & lower part) 130-169 mm	-	100	3.2
A 10229 G	Pin to connect bottom & upper part of nonius	60	100	0.80
A 952 G	Suspension angle	3600	20	13.30
A 1052 G	Bent Residential strap hanger	73	100	2.50
A 826 G	2 m hanger with hook	2000	100	20.00
A 827 G	1.7 m hanger with hook	1700	100	20.00
A 11 G	Small hook	120	100	2.00
A 12 H	Butterfly	55	100	1.00
A 829 H	Suspension hanger for T bar	130	100	2.80


\* **Note:** These admissible loads have been determined from laboratory tests in accordance with EN 13964 : 2004 and apply to the hangers and their grid connections only. No account has been taken of the strength of top fixings which must be selected as appropriate for the supporting structure and estimated load. Availability of products may vary according to location. All measurements in millimetres. All sizes are nominal. Please contact our Armstrong Technical Sales for further details.




SUSPENSION & HOLD DOWN CLIPS




Item Nr.	Description	Dimensions length (mm)	Content /Carton pcs	Weight/Carton kg
A 1837 G	Rocking hanger	80	100	2.00




A 1838 G	Hanger for wooden beam	148	100	3.20
----------	------------------------	-----	-----	------




A 1820 G	Beam flange clip 1.6 - 4.8 mm thickness	-	100	2.20
----------	---	---	-----	------




A 1821 G	Beam flange clip 4.8 - 9.5 mm thickness	-	100	3.20
----------	---	---	-----	------



A 7890 G	Universal retaining clip	-	100	0.40
----------	--------------------------	---	-----	------




A 819 G	Locking hold down clip, 6-30 mm tiles (Peakform & Square bulb)	64	500	2.40
---------	---	----	-----	------



A 1060	T35 Hold down clip for panels up to 110 mm thick	-	250	3.10
--------	--	---	-----	------

HOLD DOWN CLIPS & ACCESSORIES




EHDC 58 AG	Exterior hold down clip (Peakform & Square bulb)	102	125	7.00
------------	--	-----	-----	------




A 7912 G	Hold down clip for 40 mm soft fibre panels	68	100	1.10
----------	--	----	-----	------




A 7902 G	Hold down clip for 18-25 mm soft fibre panels	40	100	1.10
----------	---	----	-----	------




A 425 G	Board Access clip for standard 24mm T-bar	-	100	0.40
---------	---	---	-----	------




A 7930 G	Last tile clip Tegular	40	25	0.05
----------	------------------------	----	----	------




A 7931 G	Last tile clip MicroLook	40	25	0.05
----------	--------------------------	----	----	------



MCC4 G	Mitre closure clip for 6 mm Silhouette	-	200	0.30
--------	--	---	-----	------















LFC G	Peakform Corner support of lay-in light (Silhouette & 15 mm grid)	-	50	0.45
-------	--	---	----	------









A 131 G	T bar saddle clip (Peakform & Square bulb)	98	100	2.70
---------	--	----	-----	------

● PERIMETER ACCESSORIES

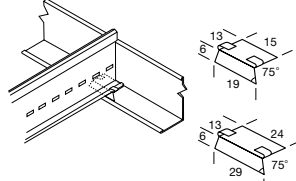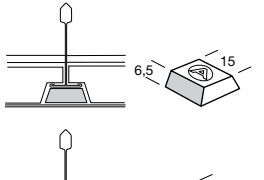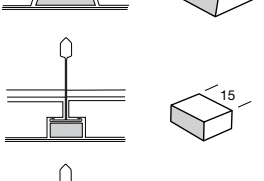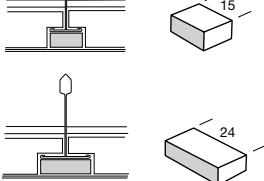Item Nr.	Description	Dimensions length (mm)	Content /Carton pcs	Weight/Carton kg
 A 328 G	Inside corner 19 mm	58	100	0.90
 A 329 G	Outside corner 19 mm	65.5	100	1.20
 A 330 G	Inside corner 24 mm	58	100	0.90
 A 331 G	Outside corner 24 mm	65.5	100	1.20
 A 332 G	Inside corner for shadowline T 1508 HB	72	100	1.60
 A 333 G	Outside corner for shadowline T 1508 HB	57.2	100	1.20
 A 0415 G	MicroLook border clip	19	500	0.80
 A 0324 G	Tegular border clip	29	500	1.20
 A 156 G	Perimeter fill-in for 15 mm grid	-	500	0.40
 A 246 G	Perimeter fill-in for 24 mm grid	-	500	0.50
 A 157	Perimeter fill-in clip for 15 mm grid - MicroLook 90 / Metal MicroLook 8	15	500	0.45
 A 247	Perimeter fill-in clip for 24 mm grid- Tegular 90 / Metal Tegular 8	24	500	0.6


● ADDITIONAL ACCESSORIES

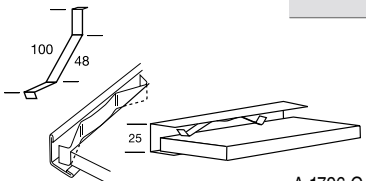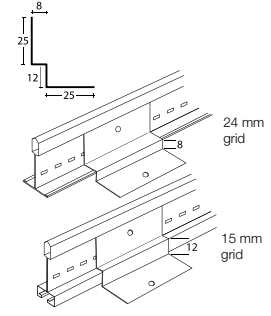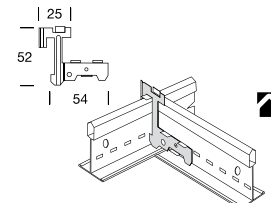Item Nr.	Description	Dimensions length (mm)	Content /Carton pcs	Weight/Carton kg
 A 1796 G	Border wedge	-	200	1.50
 UPC AG	Universal partition clip for 24 and 15 mm incl, Silhouette and Interlude grids	-	200	4.10
 C 1430 G	Variable placement hook end detail to suit on site	63.5	200	2.00
 A 7876 A	Slot tool for hour glass slots	-	1	1.10
 A SP H	Grid touch-up paint	-	1	0.20
 STAC	Single Tee Adapter Clip	-	120	2




\* **Note:** These admissible loads have been determined from laboratory tests in accordance with EN 13964 : 2004 + A1 : 2006 and apply to the hangers and their grid connections only. No account has been taken of the strength of top fixings which must be selected as appropriate for the supporting structure and estimated load.

Availability of products may vary according to location. All measurements in millimetres. All sizes are nominal. Please contact our Armstrong Technical Sales for further details.








● POST-COATED METAL CEILINGS

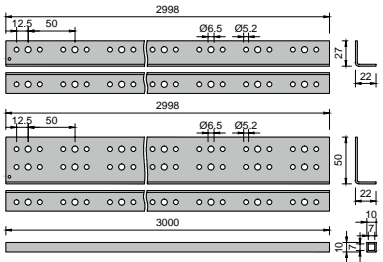

Item Nr.	Description	Material	Dimensions mm	Content /Carton pcs	lm	Weight/Carton kg
Profiles						
M311051A	Primary angle	Galvanised steel	3000 x 27 x 22	10	30	21.2
M311052	Primary angle	"	3000 x 50 x 22	10	30	30.0
M311224	Jacket tube 10 x 10 mm	"	125 x 27 x 22	10	30	12.0
Various						
C1502	Hanger for DP12 A-bar	Galvanised steel	52 x 40 x 50	100	-	3.5
M300123	Hanger for Prelude	"	63 x 20 x 4	100	-	0.7
M311024	Wall anchor for DP12 A-bar	"	50 x 35 x 35	100	-	2.5
M311025	Cross-connector for DP12 A-bar	"	50 x 35 x 35	100	-	1.0
M311053	Connector for primary angle	"	54 x 30 x 13	100	-	7.9
M311062	Hold-down clip	Spring steel	60 x 58 x 20	100	-	0.9
M311334	Level sheet	Galvanised steel	60 x 33 x 1	10	-	0.1
M900019	Double-sided adhesive tape G2000	PUR foam self-adhesive	19	1	50	0.6
Fasteners						
M311083	Hexagonal bolt M5 x 12 mm	Galvanised steel	M5 x 12	100	-	0.5
M311102	Hexagonal nut M5	"	M5 x 4	100	-	0.1
M311106	Washer M5	"	Ø10 x 1	100	-	0.1
M311222	Expansion bolt M6 x 30 mm A4	"	M6 x 30	100	-	0.8
M311231	Hexagonal bolt M6 x 30 mm	"	M6 x 30	100	-	0.8



● INSTALLATION DETAILS

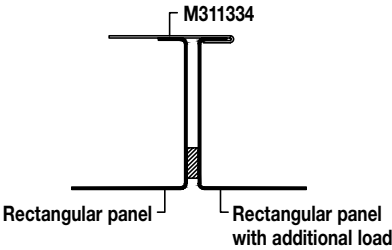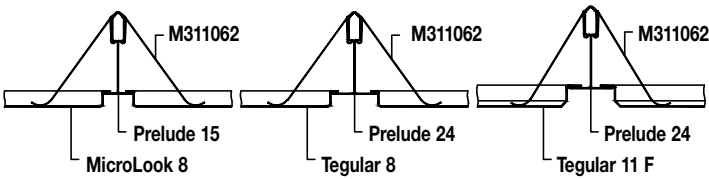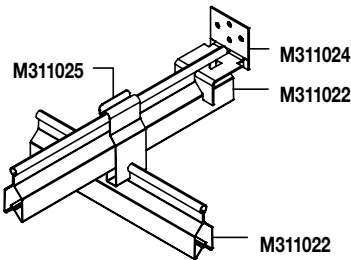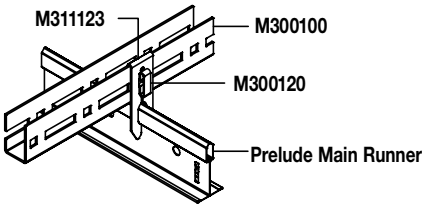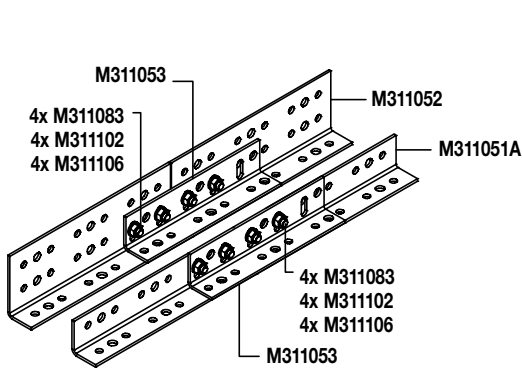




● POST-COATED METAL CEILINGS

Item Nr.	Description	Material	Dimensions mm	Content / Carton		Weight/ Carton
				pcs	lm	kg
M311358	Hexagonal secure nut M6	Galvanised steel	M6 x 5	100	-	0.3
M311191	Self-drilling screw 3.5 x 9.5 mm (for 0.7 - 2.25 mm gauge)	"	Ø3.5 x 9.5	100	-	0.1
M311307	Pop-rivet TAPD 44 BS (for 1.6 - 3.2 mm gauge)	Galvanised steel / aluminium	37	100	-	0.1
M311308	Pop-rivet TAPD 46 BS (for 3.2 - 4.8 mm gauge)	"	37	100	-	0.1
M311114	U-clamp	Galvanised steel	20 x 14 x 6	100	-	0.3
Touch-up paint						
M681001	Touch-up paint RAL 9010	Liquid paint	100 x 22	1	-	0.1
M681003	Touch-up paint RAL 9006	"	100 x 22	1	-	0.1
M681004	Touch-up paint RAL 9016	"	100 x 22	1	-	0.1
M681006	Touch-up paint RAL Global White	"	100 x 22	1	-	0.1
Gaskets and spacers						
M900001	Gasket 8 x 2 mm black	PE foam	8 x 2	1	20	0.1
M900000	Gasket 8 x 3 mm black	"	8 x 3	1	20	0.1
M900003	Gasket 8 x 4 mm black	"	8 x 4	1	20	0.1
M900002	Gasket 8 x 5 mm black	"	8 x 5	1	10	0.1
M900032	Gasket 8 x 6 mm black	"	8 x 6	1	10	0.1
M900005	Plastic spacer 2 mm transparent (max. 1 mm gauge)	Plastic	Ø10 x 2	100	-	0.1
M900006	Plastic spacer 3 mm transparent (max.1 mm gauge)	"	Ø10 x 3	100	-	0.1
M900028	Plastic spacer 3 mm black (max.1 mm gauge)	"	Ø10 x 3	100	-	0.1
M900007	Plastic spacer 4 mm transparent (max.1 mm gauge)	"	Ø10 x 4	100	-	0.1
M900008	Plastic spacer 5 mm transparent (max.1 mm gauge)	"	Ø10 x 5	100	-	0.1
M900033	Plastic spacer 5 mm transparent (1.25-1.5 mm gauge)	"	Ø10 x 5	100	-	0.1
M900011	Plastic spacer 5 mm black (max.1 mm gauge)	"	Ø10 x 5	100	-	0.1
M900009	Plastic spacer 6 mm transparent (max.1 mm gauge)	"	Ø10 x 6	100	-	0.1
M900010	Plastic spacer 7.5 mm transparent (max.1 mm gauge)	"	Ø10 x 7.5	100	-	0.1
M900026	Plastic spacer 10 mm transparent (max.1 mm gauge)	"	Ø10 x 10	100	-	0.1
M900012	Plastic spacer 10 mm black (max.1 mm gauge)	"	Ø10 x 10	100	-	0.1
M900031	Plastic spacer 12.5 mm transparent (max.1 mm gauge)	"	Ø10 x 12.5	100	-	0.1
M900027	Plastic spacer 15 mm transparent (max.1 mm gauge)	"	Ø10 x 15	100	-	0.1
M900101	Glue-on spacer Ø15 x 2 mm black	PE foam	Ø15 x 2	100	-	0.1
M900013	Glue-on spacer Ø15 x 3 mm black	"	Ø15 x 3	100	-	0.1
M900030	Glue-on spacer Ø15 x 3 mm white	"	Ø15 x 3	100	-	0.1
M900102	Glue-on spacer Ø15 x 4 mm black	"	Ø15 x 4	100	-	0.1
M900014	Glue-on spacer Ø15 x 5 mm black	"	Ø15 x 5	100	-	0.1
M900104	Rubber profile 10 x 8 mm	Elastomer	10000 x 20 x 8	1	100	4.5

● INSTALLATION DETAILS

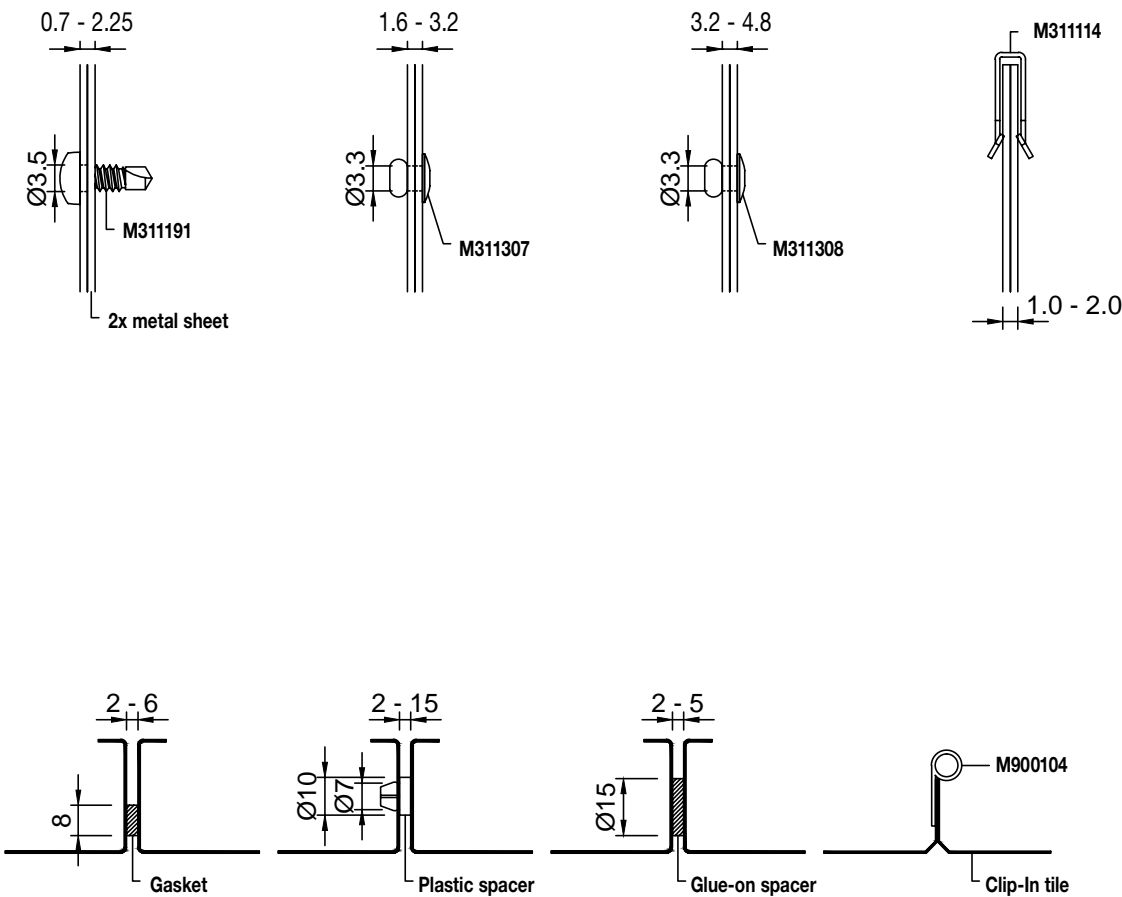

WOOD CEILINGS



CS5018	Security clip (for Vector Wood)	Spring steel	87 x 41 x 65	6	-	0.1
--------	---------------------------------	--------------	--------------	---	---	-----




CS5019	Border clip	Galvanised steel	38 x 19 x 16	100	-	0.5
CS5021	Border clip	Galvanised steel	38 x 19 x 18	100	-	0.5



CS5020	Screw 3.5 x 6.5 mm	Galvanised steel	Ø3.5 x 6.5	25	-	0.1
--------	--------------------	------------------	------------	----	---	-----



CS5157	T-bar hook (for Concealed Wood)	Galvanised steel	102 x 92 x 30	8	-	0.6
--------	---------------------------------	------------------	---------------	---	---	-----



CS5158	Safety cable	Steel	600	4	-	0.1
--------	--------------	-------	-----	---	---	-----








CS5159	Screw 4.8 x 16.5 mm	Galvanised steel	Ø4.8 x 16.5	50	-	0.1
--------	---------------------	------------------	-------------	----	---	-----



CS5160	Edge banding tape (on request)	Wood veneer	17	1	5	0.5
CS5165	Edge banding tape (on request)	Wood veneer	19	1	5	0.5

INSTALLATION DETAILS

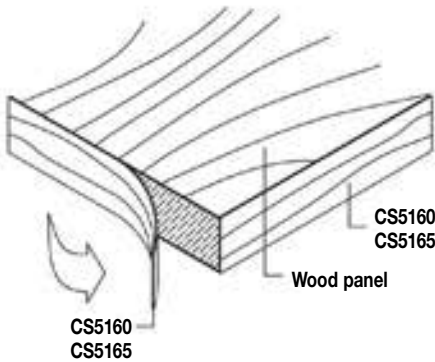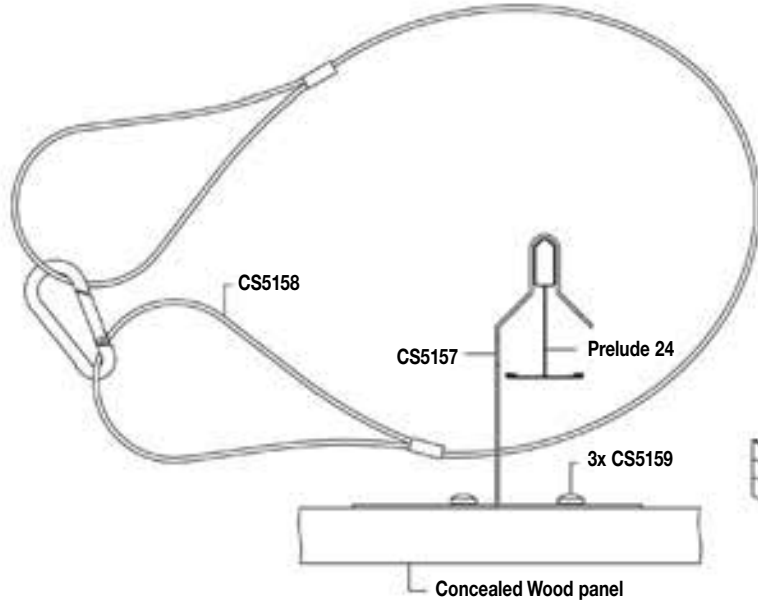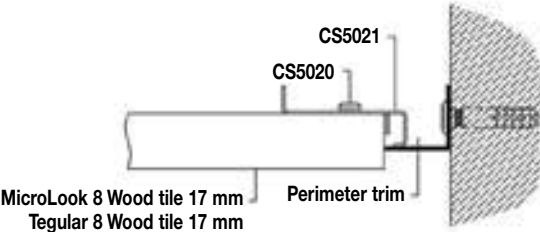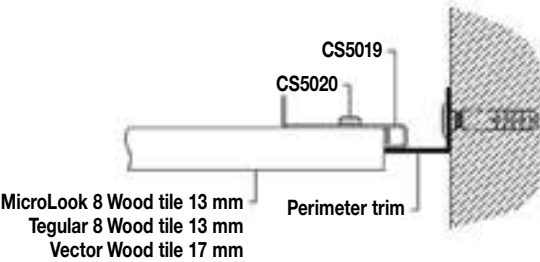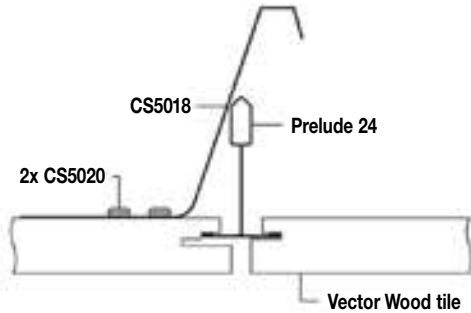

TECHNICAL INFORMATION

LOAD CAPACITY MATRIX

Loading is an important property of suspended ceiling grid systems both for the mechanical safety of the suspended ceiling and its visual appearance. In the EAA, table 6 of the suspended ceiling product standard, EN 13964:2004+A1:2006, defines 3 classes of deflection, the best being Class 1 which is L/500 (but no greater than 4mm).

Class	Maximun deflection in mm <sup>A</sup>
1	L <sup>B</sup> / 500 and not greater than 4,0
2	L <sup>B</sup> / 300
3	No limit

<sup>A</sup> The maximun deflection is the accumulative value of the deflection of the substructure component and the deflection of the membrane component.

<sup>B</sup> L is the span in mm between the suspension components or the suspension points.

The test method on which the European calculations of loadbearing capacity are based upon is also defined in EN 13964, and considers the influence of both deflection and bending moment.


The individual product pages of this brochure include a table giving the maximum uniform distributed load, based on different hanger centres, in accordance with Class 1 deflection, as defined in EN 13964:2004 + A1:2006.

For markets outside of the EAA different deflection limits are sometimes required. The tables on this page show the maximum uniform distributed load for the deflection limits shown, but taking into account deflection only. These values are calculated based upon load values determined from laboratory tests in accordance with the EN 13964 test method.

For longer spans, some of the criteria shown on this page may give quite large deflection values. Armstrong recommends a maximum of 4mm deflection between points of suspension for all grid components, irrespective of span, for aesthetic reasons. Therefore the numbers in the tables on this page are the maximum loads permitted to meet the give a deflection criteria (such as L/400) but up to a maximum value of 4mm.


SYSTEM LOAD SUMMARY (1200 x 1200 layout) - Max Load kg/m² - Deflection factor only

System	Main Runner	Primary CrossTee	Secondary CrossTee	L/500	L/400	L/360	L/300	L/250
Prelude 24 - XL <sup>2</sup>	314032 A	313051 B	312021 A	13.3	16.8	18.8	22.7	22.7
Prelude 24 - TLX	314032 A	133031	132031	13.3	16.8	18.7	22.7	22.7
Prelude 15 - XL <sup>2</sup>	304033 A	303033 B	302033 B	13.1	16.5	18.5	22.3	22.3
Prelude 15 - TL	304033 A	103033 A	102033 A	13.1	16.5	18.5	22.3	22.3
Silhouette - XL <sup>2</sup>	804042 G	803042 G	802042 G	11.4	14.4	16.1	19.5	19.5
Interlude HRC - XL <sup>2</sup>	614042 G	613042 G	612042 G	14.5	18.3	20.4	24.7	24.7
Prelude 35 - XL <sup>2</sup>	224042	243042	242042	13.9	17.7	19.8	24	24
Prelude 24 Corrosive Resistant - TLX	284042	283042	282042	13.3	16.8	18.7	22.7	22.7
Clean Room 24	EA794044	EA793044	EA792044	12.8	16.3	18.2	22.1	22.1

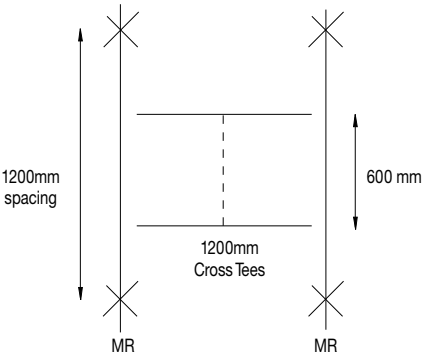


SYSTEM LOAD SUMMARY (1200x1800 layout) - Max Load kg/m² - Deflection factor only

System	Main Runner	Primary Cross Tee	Secondary Cross Tee	L/500	L/400	L/360	L/300	L/250
Prelude 24 - XL <sup>2</sup> (1800 span)	314032 A	313431 A	312021 A	6.5	7.3	7.3	7.3	7.3
Prelude 24 - TLX (1800 span)	314032 A	133432	132031	6.5	7.3	7.3	7.3	7.3

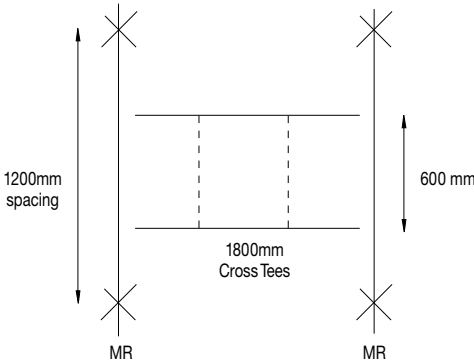

SYSTEM LOAD SUMMARY (1800x1800 layout) - Max Load kg/m² - Deflection factor only

System	Main Runner	Primary Cross Tee	Secondary Cross Tee	L/500	L/400	L/360	L/300	L/250
Prelude 24 Sixty <sup>2</sup> - XL <sup>2</sup>	404093 G	313431 A	312021 A	6.5	7.3	7.3	7.3	7.3
Prelude 24 Sixty <sup>2</sup> - TLX	404093 G	133432	132031	6.5	7.3	7.3	7.3	7.3

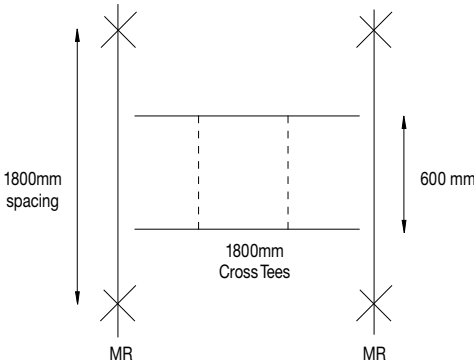



# TECHNICAL INFORMATION

## ● SYSTEM GUARANTEE

**15 YEAR** guarantee Armstrong suspension systems are covered by a 15 year product warranty.

**30 YEAR** system guarantee When installed with Armstrong ceiling tiles they have a 30 year system warranty.

This programme is more than just a performance warranty. It means that the Armstrong systems and products you specify or install:


- Will be free from defects in design, material and workmanship if properly installed and used under normal conditions.
- Have the technical expertise and experience from the n°1 global suspended ceiling specialist.
- Have been tested and accredited for the key technical attributes.
- Have been site tested to demonstrate installation integrity and simplicity.
- Will be supported at every stage of the project by the Armstrong team.
- Will be repaired or replaced by Armstrong in the unlikely event of system failure attributed to unsatisfactory product / system performance as defined in the terms and conditions of the warranty.

## ● MANUFACTURERS RECOMMENDATION

Installation of suspended ceiling systems should be carried out in accordance with Armstrong's current manufacturer's recommendations.



For grid systems there are some specific points that should be considered:

- The appropriate type of Cross Tee for the ceiling tile edge detail must be considered.
- The grid systems should be installed in such a way that the loadbearing performance of the grid is not exceeded.
- 'Dynamic' service fittings should be independently supported so not to transfer vibration into the suspension system.
- Armstrong recommend the use of the 'ladder formation' and all our loading data is based on the 'ladder formation'. Using the «H-formation» will give greater deflection for a given load.

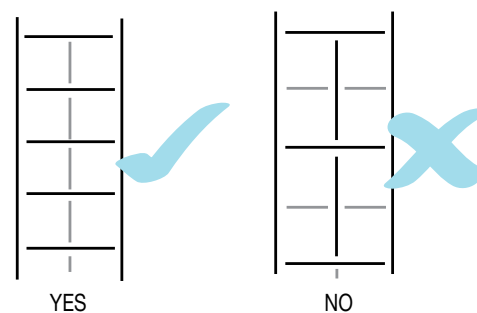

For more information, please visit Armstrong website

## ● INSTALLATION & MAINTENANCE

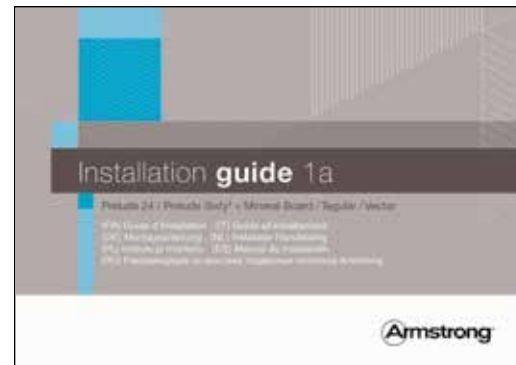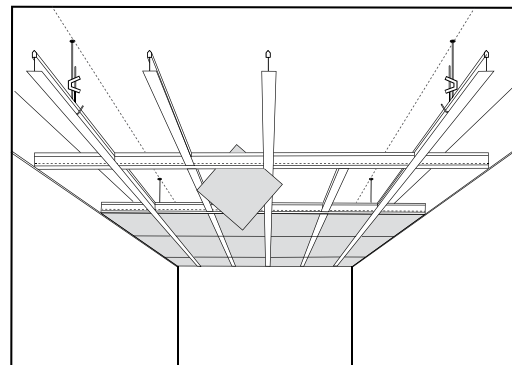

For more information, please contact us or visit the Installation & Maintenance page on Armstrong website



In Europe, the Construction Products Regulations (305/2011/EU) defines essential requirements for products (and projects) such that they are safe and fit for their intended use. Harmonised Product Standards respond to these essential requirements and set out what tests must be conducted and how the performance must be communicated. For suspended ceilings the applicable product standard is EN 13964 Suspended Ceilings – Requirements & Test Methods.

The essential requirements identified for substructure components (grid systems) are:

- Reaction to Fire
- Load bearing capacity
- Durability

It is mandatory to CE mark suspended ceiling grid and provide a Declaration of Performance in order to place it on the market.

All Armstrong Declarations of Performance can be found on the Armstrong website.

## ● FIRE SAFETY



Reaction to Fire is a mandatory CE marking characteristic and a product's performance is classified to EN 13501-1 based on the results of European test methods cited in the classification standard. This gives a "Euroclass" rating which can range from A1 (non-combustible) to F. Depending on the reaction to fire test(s) conducted, the rating may include additional classifications for smoke and flaming droplets. Smoke production is rated for s1 (the least smoke produced) to s3 (no limit). Flaming

droplets is rated from d0 (no droplets) to d3 (no limit). Each member state can then set their own building regulation requirement(s) for different areas of a building or different building types using the Euroclass classification system.

Fire Resistance – or structural fire protection – is primarily ensure the structure of a building remains stable during a fire to allow the occupants to escape and so that fire fighters can work without the threat of the building's collapse. There are several ways in which the fire resistance performance of the buildings structure can be enhanced, and a 'fire resistant' suspended ceiling installation is one of them. Fire resistance is typically classified in accordance with

EN 13501-2, although there is not yet a single harmonised European fire resistance test method which is acceptable and agreed by all members. A fire test is a system test, as it is the performance of the ceiling tile, the suspension system and in most case the floor or roof construction above. The complete construction and assembly of the test installation is important to the success of the test so Armstrong always test Armstrong tiles on Armstrong grid.

Armstrong Prelude grids with TL, TLX or XL<sup>2</sup> Cross Tees have all been tested and are all capable of use in fire resistant ceilings.

There are many details of the test construction that must be understood and adhered to. These include:

- Main Runner type and hanger centres
- Minimum depth of the ceiling void
- Floor loading as a % of the design load

Always consult the full fire test or assessment document for details and limitations. Abridged versions must be regarded as undesirable as they will not show the full test details and construction.

## ● HEALTH AND CLEANLINESS

### CLEAN ROOM

A Clean Room is a space or a series of spaces where the concentration of particles is controlled in order to minimise the introduction, generation, retention of particles inside, generally for a specific industrial or research objective, as well as in healthcare environments. Parameters such as temperature, humidity and relative pressure are also maintained at a precise level, as defined in ISO 14644-1.

- Clean rooms are classified ISO 1 (cleanest) to ISO 9 depending on the number of particles measured.
- The performance is tested to ISO 14644-1 which determines the particle cleanliness class. Although US Federal Standard 209E has been officially withdrawn, it is continuously used as a reference.

Armstrong Clean Room grid gives enhanced performance thanks to its co-extruded PVC gasket which enables a tighter seal to be established between tile and grid and has been tested to ISO 4.

There are 2 types of rooms:

- rooms with over-pressure, to avoid pollutants from entering (dust, bacteria,...)
- rooms with negative pressure, to avoid various contaminants from escaping to the outside (viruses, bacteria, spores,...).



# WESTERN EUROPE

## Belgium & Luxembourg

Armstrong Building Products B.V.  
Postbus 3803  
4800 DV Breda  
Netherlands  
Tel.: +32 02 223 00 72  
Fax: +31 (0) 76 521 04 07  
e-mail: benelux-info@armstrong.com  
www.armstrongplafonds.be

## Germany & Switzerland

Armstrong Building Products  
Kundenservice  
Office Building Quadrium  
Claudius Prinsenlaan 126  
4818 CP Breda  
Netherlands  
Tel.: +49 (0) 251 7603 210  
Fax: +49 (0) 251 7603 593  
e-mail: deutsche-info@armstrong.com  
www.armstrong-decken.de  
www.armstrong-decken.at  
www.armstrong.ch

Firmensitz  
Armstrong Building Products GmbH  
Robert-Bosch-Str. 10  
48153 Münster  
Germany

Armstrong Metalldecken AG  
Breitfeldstrasse 8  
9015 St. Gallen  
Switzerland  
Tel.: +41 (0) 71 313 63 63  
Fax: +41 (0) 71 313 64 00  
e-mail: gema@armstrong.com  
www.armstrong.ch  
www.gema.biz

Zentralschweiz  
Armstrong Metalldecken AG  
Büro / Lager Zentralschweiz  
Grossweid 9  
6026 Rain  
Switzerland  
Tel.: +41 (0) 41 921 63 63  
Fax: +41 (0) 41 921 63 80  
e-mail: gema@armstrong.com  
www.armstrong.ch  
www.gema.biz

Armstrong Plafonds Métalliques SA  
Bureau et Dépôt Suisse Romande  
Avenue de Châtelaine 87  
1219 Châtelaine  
Suisse  
Tel.: +41 (0) 22 731 60 70  
Fax: +41 (0) 22 731 60 74  
e-mail: gema@armstrong.com  
www.armstrong.ch  
www.gema.biz

## Austria

Armstrong Metalldecken GmbH  
Bundesstrasse 70  
6830 Rankweil  
Austria  
Tel.: +43 (0) 55 22 34 44-0  
Fax: +43 (0) 55 22 34 44-8  
e-mail: gema@armstrong-decken.at  
www.armstrong-decken.at  
www.gema.biz

Armstrong Metalldecken GmbH  
Messendorferstrasse 6  
8041 Graz  
Austria  
Tel.: +43 (0) 316 471 584  
Fax: +43 (0) 316 471 584-10  
e-mail: gema@armstrong-decken.at  
www.armstrong-decken.at  
www.gema.biz

## Spain & Portugal

Armstrong Building Products SAS  
Immeuble Paryseine  
3, allée de la Seine  
94854 Ivry-sur-Seine Cedex  
France  
Phone: + 34 91 642 04 99  
info-espana@armstrong.com  
www.armstrongtechos.es

## France

Armstrong Building Products SAS  
Bureaux Commerciaux France  
Immeuble Paryseine  
3 Allée de la Seine  
94854 Ivry-sur-Seine  
France  
Tel.: 0800 41 36 43  
Fax: +33 1 45 21 04 11  
e-mail: info-France@armstrong.com  
www.armstrongplafonds.fr

Siège social  
Armstrong Building Products SAS  
67 rue de Salins – CS 20089  
25302 Pontarlier Cedex  
France

## Italy & Greece

Armstrong Building Products  
Ufficio Commerciale Italia  
Immeuble Paryseine  
3 Allée de la Seine  
94854 Ivry-sur-Seine  
France  
Tel.: +39 800 118 085  
e-mail: info-italia@armstrong.com  
www.armstrongsoffitti.it

## Netherlands

Armstrong Building Products B.V.  
Postbus 3803  
4800 DV Breda  
Netherlands  
Tel.: (+31) 076 523 02 00  
Fax: (+31) 076 521 04 07  
e-mail: benelux-info@armstrong.com  
www.armstrongceilings.nl

## United Kingdom

Armstrong World Industries Ltd  
Building Products Division  
Armstrong House  
38 Market Square  
Uxbridge UB8 1NG  
United Kingdom  
Tel.: 0800 371 849  
Fax: +44 1895 274287  
e-mail: sales-support@armstrong.com  
www.armstrongceilings.co.uk

## Republic of Ireland

Armstrong World Industries Ltd.  
108 Greenlea Road  
Terenure  
Co Dublin 6W  
Ireland  
Tel.: 1800 409002  
Tel.: (+353) 1 499 1701  
Fax: (+353) 1 490 7061  
e-mail: sales-support@armstrong.com  
www.armstrongceilings.ie

# CENTRAL EUROPE NORTH

## (DK/EE/FIN/IS/LT/LV/N/PL/S)

Armstrong Building Products BV  
Sp. z o.o. Oddział w Polsce  
ul. Domaniewska 37  
02-672 Warszawa  
Poland  
Tel.: (+48) 22 337 86 10/ 86 11  
Fax: (+48) 22 337 86 12  
e-mail: service-ce@armstrong.com  
Latvia: www.armstrong.lv  
Lithuania: www.armstrong.lt  
Norway: www.armstrong.no  
Poland: www.armstrongsuity.pl  
Sweden: www.armstrong.se

# CENTRAL EUROPE SOUTH

## (AL/BA/BG/CZ/HR/HU/KO/ MD/ME/MK/RO/RS/SK/SI)

Armstrong Building Products  
Lighthouse building,  
Jankovcova 1569/2c,  
170 00 Praha 7,  
Czech Republic  
Tel.: +420 725 477 588  
e-mail: service-ce@armstrong.com  
Czech Republic: www.armstrong.cz  
Hungary: www.armstrong.co.hu  
Romania: www.armstrong.ro  
Serbia: www.armstrong.rs  
Slovakia: www.armstrong.sk  
Slovenia: www.armstrong.si  
www.armstrongceilings.eu

# EASTERN EUROPE

## CIS

Armstrong Moscow GmbH  
Mosfi Imovskaya Street 38A,  
Moscow 119285,  
Russian Federation  
Tel.: +7 (495) 258 5100  
Fax: +7 (495) 258 5103  
e-mail: info-cis@armstrong.com  
Russian Federation:  
www.armstrongceilings.ru

# MIDDLE EAST / AFRICA / TURKEY

## Armstrong World Industries Ltd Africa Middle East Turkey Division

Armstrong House  
38 Market Square  
Uxbridge UB8 1NG  
Tel.: +44 01895 202097  
Fax: +44 01895 272928  
e-mail: sales-support@armstrong.com  
www.armstrong.eu  
Israel: www.armstrong.co.il  
South Africa:  
www.armstrong-ceilings.co.za

## Middle East Regional Office, Dubai, UAE & French Speaking Africa

Office No. 2003, 20th Floor  
Gold Crest Executive Tower  
Jumeirah Lakes Towers  
P.O. Box 73831  
Dubai, United Arab Emirates  
Tel.: +971 4 453 4545  
Fax: +971 4 453 4546  
info-me@armstrong.com  
www.armstrong.ae

## Turkey

Armstrong Europa GmbH  
Mimar Sinan Mah. Mimar Sinan  
Cad. No: 35/2 Cekmekoy  
Istanbul  
Turkey  
Gsm: +90 542 772 49 22  
Gsm: +90 544 293 5931  
www.armstrong.com.tr  
etulpar@armstrong.com

Agency: GECKO- 12/2015 - Copyright: Foto Kushtrimi, James Sleight Design Quorum, Simon Miles, Szymon Polański, Nike Bourgeois, Richard Gooding, Grigori Rassinier, Philip Durrant, Katarzyna Ulanska, Sergei Kobylko, Valerian Wurzer, Kamen Valkanov, Studio Vu, Beppe Raso, Joel Knight, Francisco Urrutia, Nina Baisch, Beat Bühler, Rudi Walti, Luca Girardini. Armstrong Building Products - RCS Besançon B 784 131 575 Printed on chlorine free paper.

### Advisory note

All photographic and design elements supplied in this brochure do not necessarily reflect any recommendation by any of the companies named in this brochure as to the proper use or recommended methods of installation of suspended ceilings and are supplied only as informative material. For technical reasons in printing, differences may appear between colours printed in this brochure and the actual product. The choice of colours should always be made from a sample of the product. All statements and technical information contained in this brochure, or any publication of the companies named in this brochure, relating to Armstrong ceilings are based on results obtained under laboratory test conditions. **It is the responsibility of the user to verify with the seller of the products in writing that such statements and information are appropriate to the specific use intended.** Sales of the products and liability of the selling companies are in accordance with the terms and conditions of sale of the selling company. All product specifications are subject to modifications without prior notice.

Inspiring Great Spaces™



CEILING SYSTEMS