


# rackbox

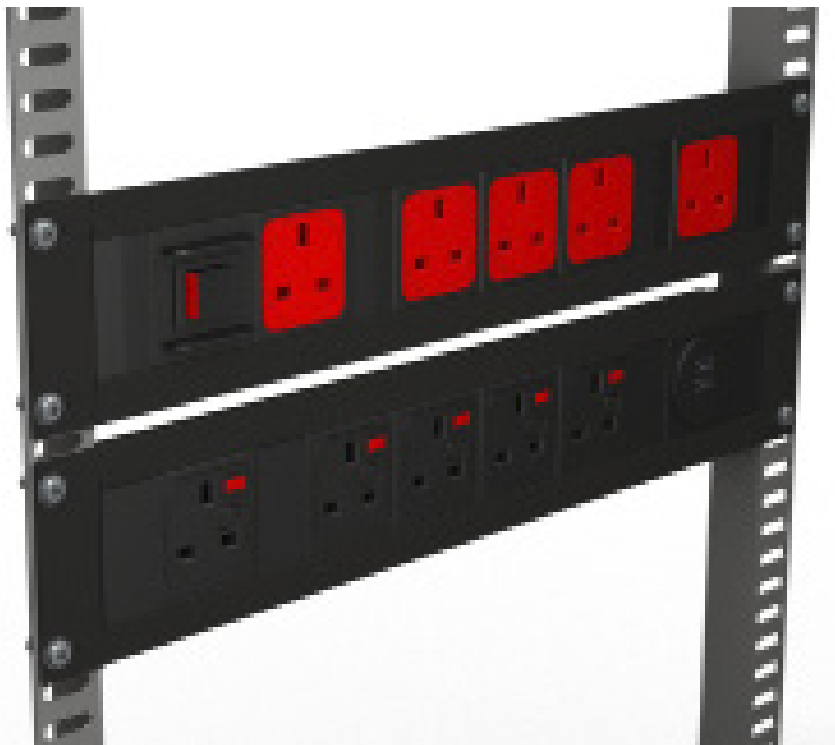

Based on the POWERBOX range, RACKBOX may be supplied to suit most configurations of power, data and telecom connectors.

Equipment may be protected with a range of safety devices including MCBs, RCDs, surge protection and Master-Slave switching when required. 'Clean' and 'Dirty' power sockets can be indicated by colour coding for added protection.

The illustration shows a horizontally mounted unit, RACKBOX may also be configured in a vertical format.

Finished in black, grey or silver and black, with other colours available to complement rack finishes subject to order quantity

All **OE** Electrics' products are manufactured to enable compliance with BS6396 or BS7671 where relevant.

Please call or email for further information


## USPs

- Can be protected by a range of safety devices
- mount horizontally or vertically
- Standard colours are Black, Grey or Silver
- Available with TUF charger
- BS6396 compliant (where applicable)
- Available with power sockets from different nationalities




# technical

## Common Modular Components\*

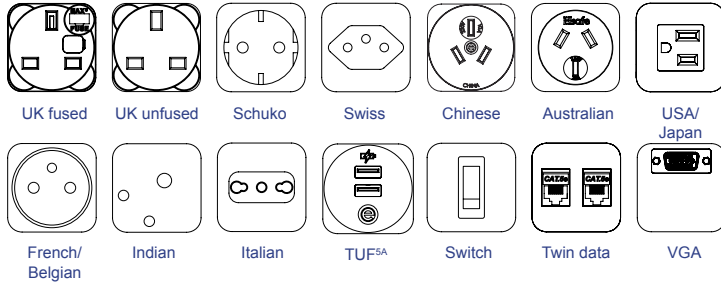


\*See website for more

## Standard Inlets/Outlets\*

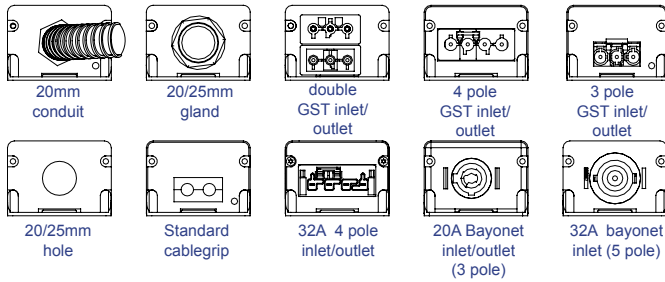

## Unit Dimensions

RACKBOX can be made up to 3m in length

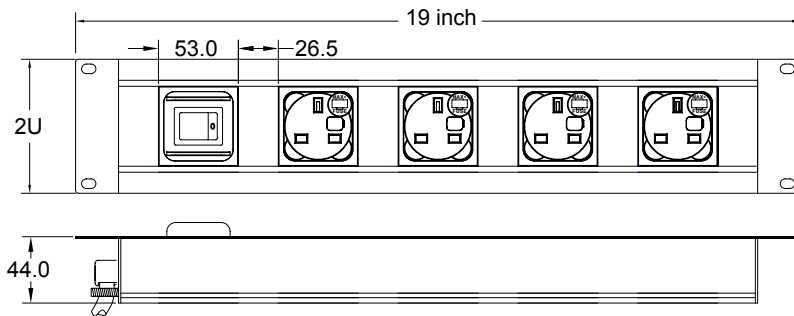

## Features

### Configuration:

Power only / Data only / Combined (Power & Data/AV)  
Internal segregation between Power and Data/AV in combined RACKBOX

### Insulation:

Earthed aluminium casing with fire retardant ABS fascias.

### Earth Bonding:

A rewirable external earth terminal allows the removal/ change of earth bonding leads without dismantling the unit.

### Fusing: (to enable compliance to BS6396)

5 x 20mm anti-surge ceramic fuses, with colour-coded fuseclips to denote the rating (3.15A/5A)

### Security:

Anti-Flex system: A unique full length locking system, which guarantees unit integrity, regardless of the length of the unit.

### Testing:

100% testing - continuity, polarity, insulation & earth

### Soft Wiring (power)

Power wired to Wieland GST connector allows starter cables to be changed to suit requirements, especially useful during moves and changes (CHURN)